

SFM101 THRU SFM106

SUPER FAST GLASS PASSIVATED RECTIFIERS

FEATURES:

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Glass passivated Chip

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MECHANICAL DATA

Case : Molded plastic use UL 94V-0 recognized flame retardant epoxy


Terminals : Plated terminals,solderable per MIL-STD-202, Method 208 guaranteed

Polarity : Sliver color band on body denotes cathode

Mounting Position : Any

Weight : 0.116 grams, 0.0046 ounce

MELF / DO-213AB

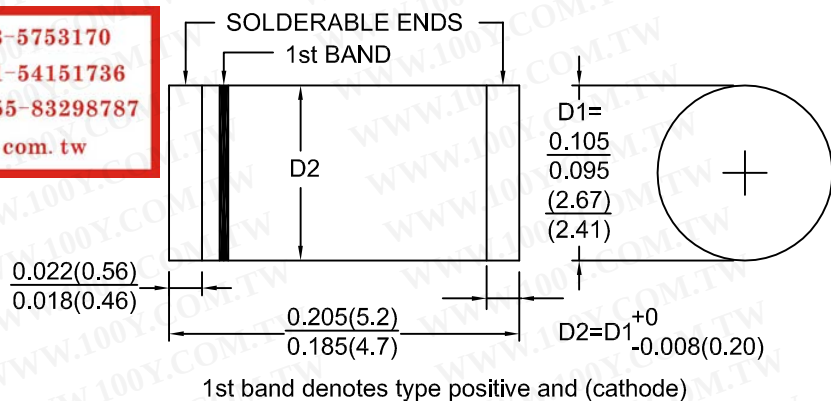

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temp. unless otherwise specified.

Single phase, half sine wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20 %.

Characteristic	Symbol	SFM 101	SFM 102	SFM 103	SFM 104	SFM 105	SFM 106	Units
Maximum recurrent peak reverse voltage	VRRM	50	100	200	300	400	600	Volts
Maximum RMS voltage	VRMS	35	70	140	212	280	420	Volts
Maximum DC blocking voltage	VDC	50	100	200	300	400	600	Volts
Maximum average forward rectified current at T _L = 55°C	I _(AV)	1.0						Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load(JEDEC Method)	I _{FSM}	30.0						Amps
Maximum instantaneous forward voltage at 1.0 A	V _F	1.0			1.3		1.7	Volts
Maximum DC reverse current Ta=25°C at rated DC blocking voltage Ta=100°C	I _R	5.0 100						μ A
Maximum reverse recovery time (NOTE 1)	t _{rr}	35						nS
Operating temperature range	T _J	-65 to +150						°C
Storage temperature range	T _{stg}	-65 to +150						°C

NOTES:

(1) Reverse recovery test condition : I_F=0.5A, I_R=1.0A, I_{rr}=0.25A

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) P.C.B. mounted on 0.2x0.2"(5.0x5.0mm) copper pad area

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FIG.1 - FORWARD CURRENT DERATING CURVE

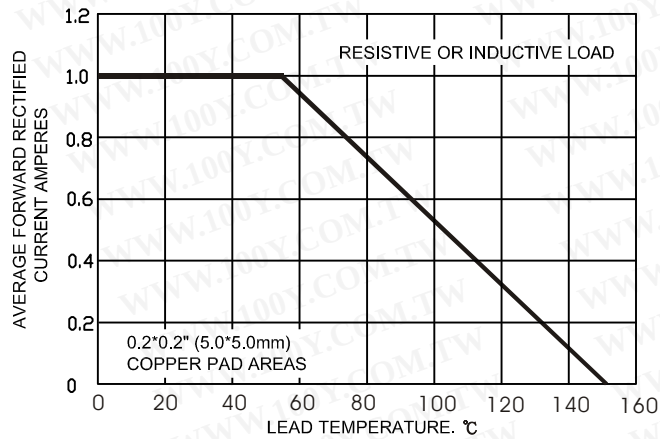


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

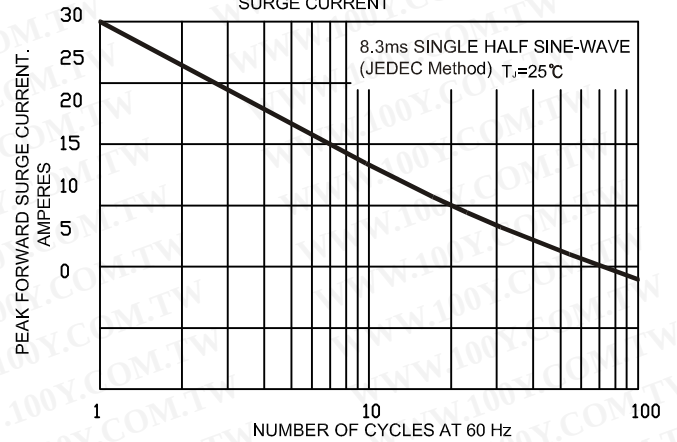


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

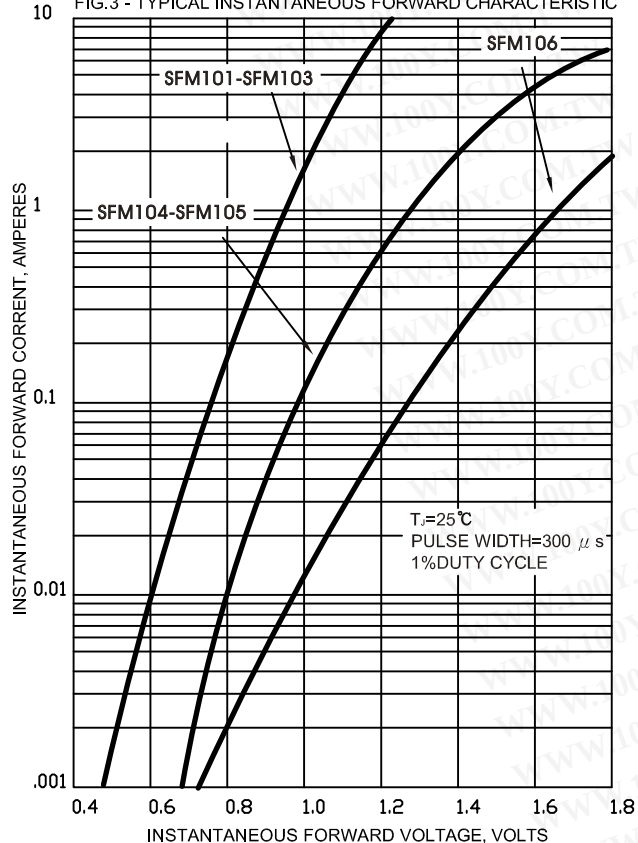


FIG.4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

