




Series SP86

Dip Pushbutton Switches




SPECIFICATIONS:

RATING: 50mA 24V DC (Minimum 1 μ A current is acceptable)
INITIAL CONTACT RESISTANCE: 20m Ω max. (AC 200 μ V, 5mA)
DIELECTRIC STRENGTH: 250V AC 1 minute (Except between terminals of LED)
INSULATION RESISTANCE: 100M Ω min. (250V DC megger)
ELECTRICAL LIFE: 200,000 operations (Rated voltage and current)
STATIC CAPACITY: 1.5pF max. (1MHz)
SHOCK RESISTANCE: 30G (3 directions perpendicular to each other 3 times for each direction)
OPERATION TEMPERATURE RANGE: -25°C to 75°C

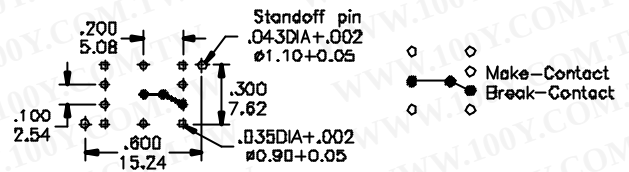


CAP STYLES

A0




A1




A2




B0



B1



B2



CAP COLORS

1=RED
 2=YELLOW
 3=GREEN
 4=WHITE
 5=BLACK
 6=ORANGE
 7=BLUE
 8=BROWN
 9=GRAY

LED COLORS

LEFT: 1=RED 2=YELLOW 3=GREEN
 RIGHT: 1=RED 2=YELLOW 3=GREEN

HOW TO ORDER

