


T-0 BARE BOARD PROBES

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

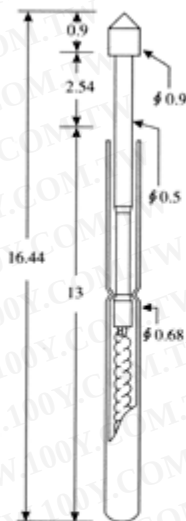


- Recommended min. center (最小間距) : 1.27 (.050")
- Mounting hole size (鑽孔尺寸) : 0.914 (.036") / 0.95 (.0374")
- Full travel (行程) : 2.54 (0.1")
- Materials and finishes (材料及塗飾) :
 Plunger : SK4,Rh plated
 Barrel : Phosphor bronze,Gold plated
 Spring : Music wire,Gold plated
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50 mΩ


Receptacle specifications

- Materials and finishes : Brass,Gold plated


T0-0.5A




T0-0.5B




T0-0.5D




T0-0.5F(0.15)




T0-0.5F(0.25)




T0-0.5F(直/刀)




T0-0.5G




T0-0.6E




T0-0.9A




T0-0.9D




T0-0.9E




T0-0.9F




T0-0.9G




T0-0.9H




R-OVC




R-OWC




T0-0.9T



T0-1.0E




R-OVS




R-OWS



T0-1.2E



R-OV(W)

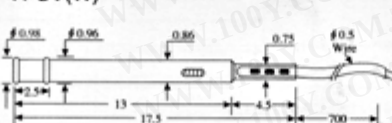

R-OW(W)

