



T-1 BARE BOARD PROBES

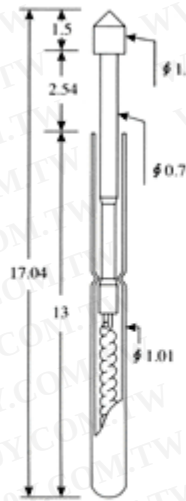


- Recommended min. center (最小間距) : 1.9 (.0748")
- Mounting hole size (鑽孔尺寸) : 1.35 (.0531") / 1.4 (.0551")
- Full travel (行程) : 2.54 (0.1")
- Materials and finishes (材料及塗飾):
 Plunger : Be Cu,Rh plated
 Barrel : Phosphor bronze,Gold plated
 Spring : Stainless
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50 mΩ


T1-0.7A




T1-0.7B




T1-0.7D




T1-0.7F(0.25)



T1-0.7F(直爪)




T1-0.7G




T0-1.0E




T1-1.0D




T1-1.3A




T1-1.3DS




T1-1.3ES




T1-1.3F




T1-1.3G




T1-1.3H




T1-1.3K




T1-1.3T




T1-1.5A




T1-1.5ES




T1-1.5G



T1-1.5H



T1-1.5K



T1-1.5T

