



T-11 BARE BOARD PROBES

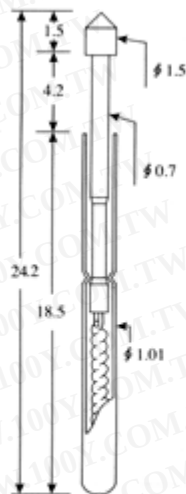


- Recommended min. center (最小間距) : 1.9 (.0748")
- Mounting hole size (鑽孔尺寸) : 1.35 (.0531") / 1.4 (.0551")
- Full travel (行程) : 4.2 (0.165")
- Materials and finishes (材料及塗飾) :
 Plunger : Be Cu, Rh plated
 Barrel : Phosphor bronze, Gold plated
 Spring : Stainless
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50 mΩ

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


T11-0.7B



T11-0.7D




T11-0.7F(0.25)




T11-0.7F(直爪)




T11-1.0D




T11-1.0E




T11-1.3A




T11-1.3E




T11-1.3F




T11-1.3G




T11-1.3H




T11-1.3K




T11-1.3T




T11-1.5A




T11-1.5E



T11-1.5H



T11-1.5K



T11-1.5T

