


3/8" Square Multiturn Cermet Trimmers



The T93 is a small size trimmer - 3/8" x 3/8" x 3/16" - answering PC board mounting requirements. Five versions are available which differ by the position of the control screw in relation to the PC board plane and by the spacing of the terminals. Excellent operational stability is provided by the use of a cermet element.


FEATURES

- Industrial Grade
- 0.5 Watt at 70°C
- CECC 41 100
- MIL-R-22097
- Good stability
- Contact resistance variation < 1% typical
- Meet MIL-R-22097 specifications


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIMENSIONS in millimeters



T93XA

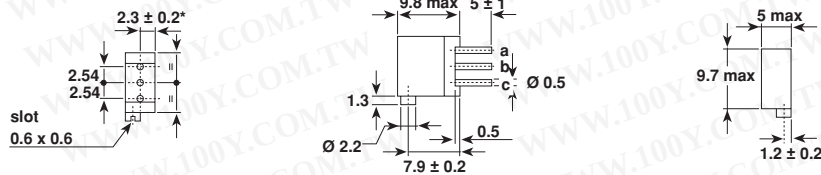



Terminal Spacing on a 2.54 PCB





T93XB

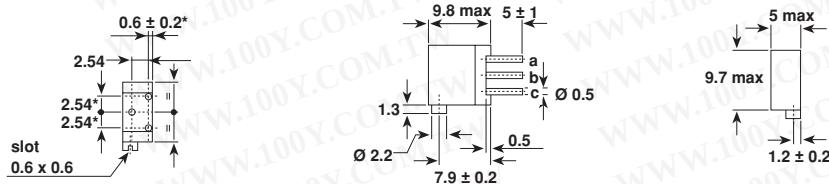



T93YA

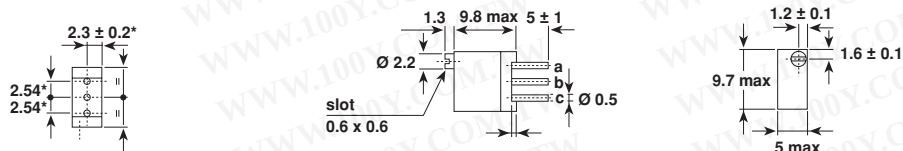


T93YB

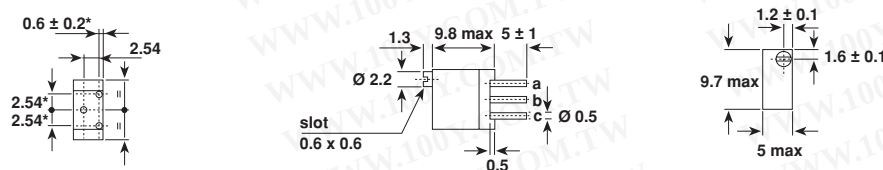

T93Z

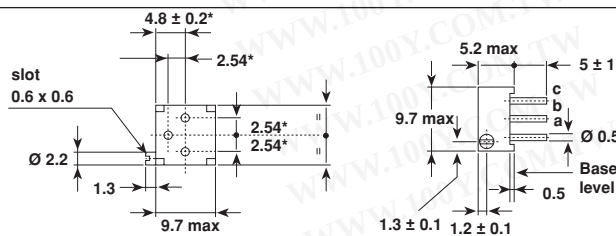

CIRCUIT DIAGRAM



*to be measured at base level

**ELECTRICAL SPECIFICATIONS**


Resistive Element	cermet
Electrical Travel	19 turns $\pm$ 2
Resistance Range	10 to 2.2 M Ω
Standard Series E3	1 - 2.2 - 4.7 and 1 - 2 - 5
Tolerance	Standard
	On Request
	$\pm$ 10%
	$\pm$ 5%
Power Rating	Linear
	Logarithmic
	0.5 W at + 85°C
	not applicable
Temperature Coefficient	See Standard Resistance Element Data
Limiting Element Voltage (Linear Law)	250 V
Contact Resistance Variation	2% Rn or 2 Ω
End Resistance (Typical)	1 Ω
Dielectric Strength (RMS)	1000 V
Insulation Resistance (500 VDC)	10 ⁶ M Ω

MECHANICAL SPECIFICATIONS

Mechanical Travel	22 turns $\pm$ 5
Operating Torque (max. Ncm)	1.5
End Stop Torque	clutch action
Unit Weight (max. g)	1.2

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	- 55°C + 155°C
Climatic Category	55/125/56
Sealing	fully sealed container IP67

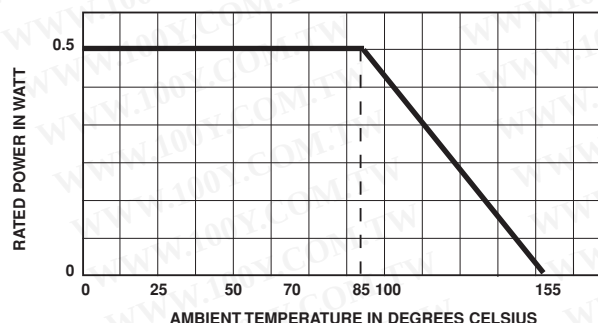POWER RATING CHART**PERFORMANCE**

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\frac{\Delta R_T}{R_T}$ (%)	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)
Load Life	1000 hours at rated power 90°/30' - ambient temperature 85°C	$\pm$ 1% Contact resistance variation : < 1% Rn	$\pm$ 2%
Climatic Sequence	Phase A dry heat 125°C - 30% Pr Phase B damp heat Phase C cold -55°C Phase D damp heat 5 cycles	$\pm$ 0.5%	$\pm$ 1%
Long Term Damp Heat	56 days	$\pm$ 0.5% Dielectric strength : 1000 V RMS Insulation resistance : > 10 ⁶ M Ω	$\pm$ 1%
Rapid Temperature Change	5 cycles - 55°C at + 125°C	$\pm$ 0.5 %	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm 1\%$
Shock	50 g 11 ms 3 successive shocks in 3 directions	$\pm$ 0.1%	$\pm$ 0.2%
Vibration	10 - 55 Hz 0.75 mm or 10 g during 6 hours	$\pm$ 0.1%	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm 0.2\%$
Rotational Life	200 cycles	$\pm$ 2 % Contact resistance variation : < 1% Rn	

**STANDARD RESISTANCE ELEMENT DATA**

STANDARD RESISTANCE VALUES	LINEAR LAW			T.C. – 55°C + 125°C
	MAX. POWER AT + 85°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	
Ω	W	V	mA	ppm/°C
10	0.5	2.2	224	0 + 200
22		3.3	150	
47		4.8	103	
100	↓	7	70	± 100
220		10.5	47	
470		15.3	32	
1k		22.4	22	
2.2k		33.2	15	
4.7k		48.5	10	
10k		70.7	7	
22k		105	4.8	
47k		153	3.2	
100k		224	2.2	
220k	0.5	250	1.1	
470k	0.13	250	0.53	
1M	0.06	250	0.25	
2.2M	0.028	250	0.11	

MARKING

Printed : VISHAY logo, series, style, rated ohmic value
(in Ω , k Ω , M Ω), tolerance (in %), manufacturing date, mark-
ing of terminal 3.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PACKAGING

– In magazine pack by 50 pieces (tube) code “TU50”.

ORDERING INFORMATION

T93	XA	220k Ω	± 10 %	TU50
SERIES	VERSION	OHMIC VALUE	TOLERANCE	PACKAGING
				TU50: Tube