

MODEL TL-2200

International size reference: C, ER26500



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TADIRAN LITHIUM BATTERIES

TECHNICAL DATA



(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 2 mA, to 2V 7.2 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 230 mA
- Maximum pulse current capability 400 mA
- Weight 50.5g (1.78 oz)
- Volume 26 cc
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

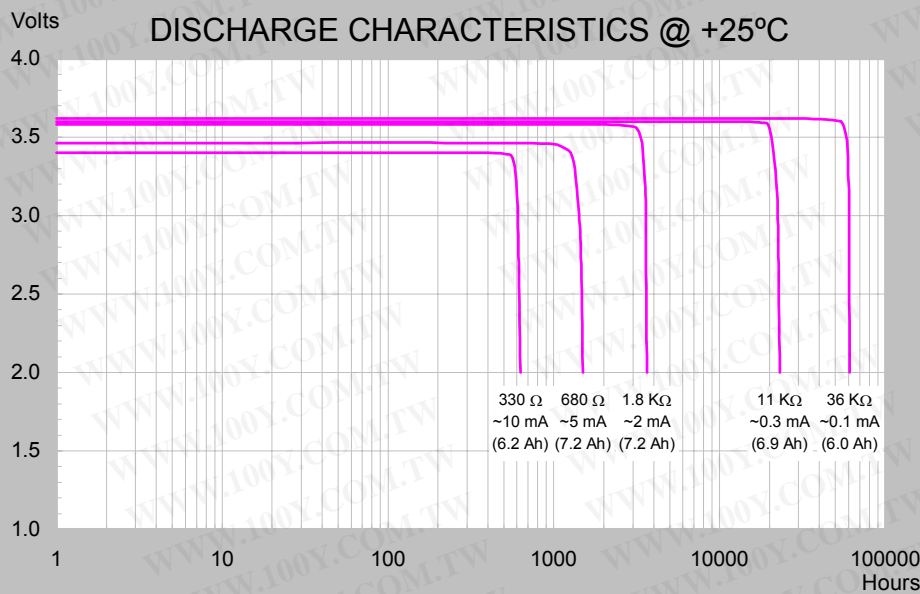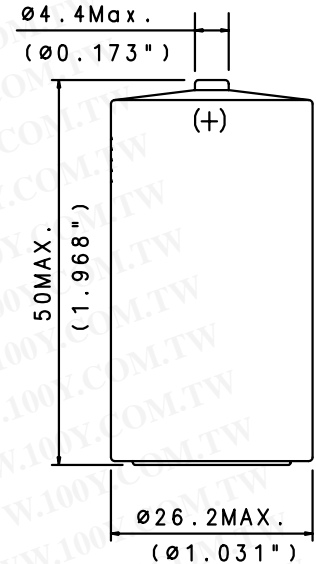

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-5120-21500
SUFFIX- /T SOLDER TABS	15-5120-31500

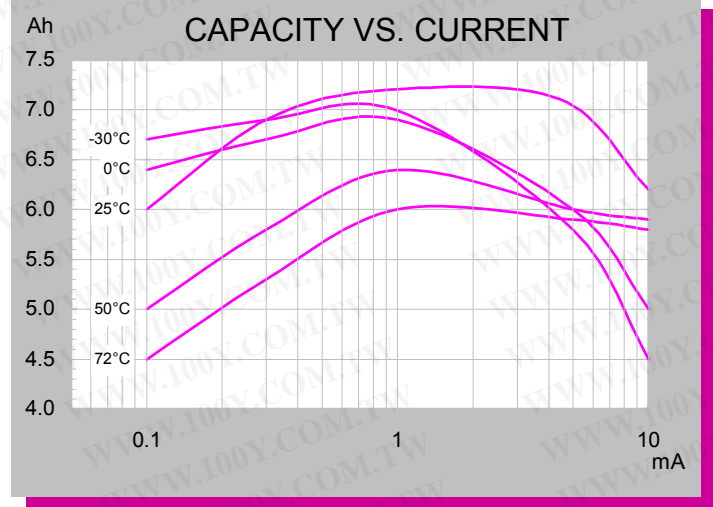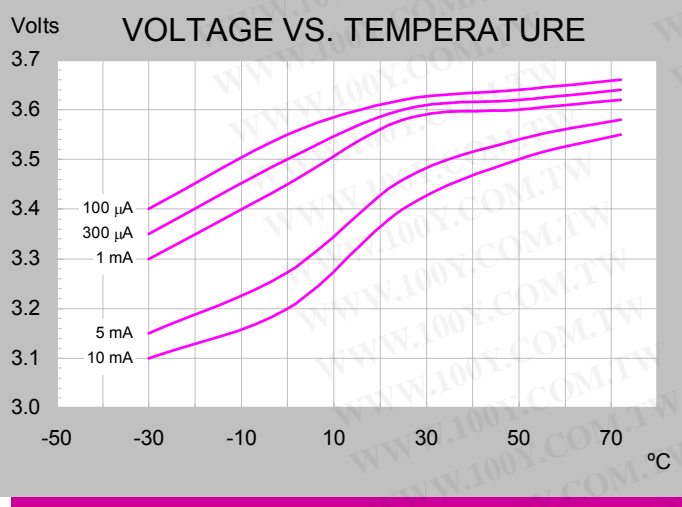

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. B 04/03