


工作桌

TANKO

重量型雙櫃工作桌 Unit of measurement m/m

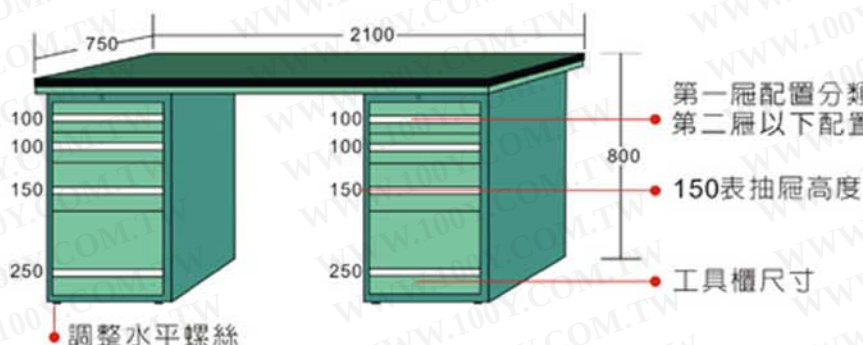

Size : H800 x W2100 x D750

WAD-77041(耐衝擊)
WAD-77041F(耐磨)
WAD-77041S(不銹鋼)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Size : H800 x W2100 x D750

WAD-77042(耐衝擊)
WAD-77042F(耐磨)
WAD-77042S(不銹鋼)



Size : H800 x W2100 x D750

WAD-77051(耐衝擊)
WAD-77051F(耐磨)
WAD-77051S(不銹鋼)



Size : H800 x W2100 x D750

WAD-77054(耐衝擊)
WAD-77054F(耐磨)
WAD-77054S(不銹鋼)



Size : H800 x W2100 x D750

WAD-77055(耐衝擊)
WAD-77055F(耐磨)
WAD-77055S(不銹鋼)



Size : H800 x W2100 x D750

WAD-77056(耐衝擊)
WAD-77056F(耐磨)
WAD-77056S(不銹鋼)

工作桌 Work Bench

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TANKO

桌板種類與特性

Worktops & features

Unit of measurement : m/m

桌板種類 Worktop kinds	桌板標準規格 Worktop standard size	桌板材質與特性 Worktop material & features
耐衝擊桌板 Crack-resistant worktop 	1500W x 750D x 50T mm 1800W x 750D x 50T mm 2100W x 750D x 50T mm	桌板使用高壓成型纖維板，表面黏貼綠色軟性壓紋特殊合成膠皮，桌板四邊並以PVC長型膠條封邊，以保護桌邊不易受損。 特性：耐衝擊、耐酸、耐鹼、吸振、美觀，適合一般工廠鉗工作業、機具維修、生產線包裝與保養廠作業及其他用途使用。 Made from fiber board, covered with special plastic in worktop and all around supplied with plastic strip. Features : crack-resistant, oil-resistant acid-resistant. Alkaline-resistant.
耐磨桌板(F) Abrasion-resistant worktop 	1500W x 750D x 50T mm 1800W x 750D x 50T mm 2100W x 750D x 50T mm	桌板使用高壓成型纖維板，表面黏貼灰色皮紋面熱固性樹脂高壓板，桌板四邊並以PVC長型膠條封邊，以保護桌邊不易受損。 特性：耐磨、耐高溫、耐酸、耐鹼，適合一般工廠電子廠、研究所、實驗室、醫院、學校作業、儀器存放、檢測、維修等用途。 Made from fiber board. Covered with high pressure decorative laminates in worktop, and all around edges supplied with plastic strip. Features : alkaline-resistant, acid-resistant. Abrasion-resistant, heat-resistant.
原木桌板(W) Beechwood worktop 	1500W x 750D x 50T mm 1800W x 750D x 50T mm	桌板使用樺木與防水膠經加壓製造而成。 特性：表面光滑平整，美觀不易變形，耐油、耐熱、耐酸、耐鹼，適合一般工廠作業與精密模具維修、儀器置放與檢測等用途。 Made with layers laminated and cross-glued beechwood and impregnated with linseed oil. Features : heat-resistant, oil-resistant acid-resistant alkaline-resistant, tension and distortion proof.
不銹鋼桌板(S) Stainless steel worktop 	1500W x 750D x 50T mm 1800W x 750D x 50T mm 2100W x 750D x 50T mm	桌板使用高壓成型纖維板，表面包1.2mm砂面不銹鋼板，以達美觀耐用。 特性：耐高溫、耐磨損、耐油、耐酸鹼腐蝕，使用壽命長，為多功能桌板，適合一般工廠、學校實驗室、食品業、醫藥業、研究室、電子廠無塵室使用。 Made from fiber board, covered with 1.2mm stainless steel in worktop and all around edges. Features : heat-resistant, abrasion-resistant, oil-resistant acid-resistant. Alkaline-resistant
模具平台(A) Worktop for MOLD&DIE 	1500W x 750D x 48T mm 1800W x 750D x 48T mm	桌板使用36mm/m合板，上鎖12mm/m鐵板，以達堅固耐用。 特性：耐高溫、耐衝擊、耐磨損、耐油，易清理，維護容易，結構堅固，使用壽命長，適合重型工業、模具工廠、大型機具、模具維修保養、組裝等使用。 Made with 36mm mulity-layer cross-glued beech plywood and lay down 12mm thick steel plate in top. Features : heat-resistant crack-resistant oil-resistant abrasion-resistant.

桌板選購說明 Worktop order expression

Example :

W A - 5 7 F

桌板材質 Worktop material

F 表耐磨桌板 Abrasion-resistant worktop

S 表不銹鋼桌板 Stainless steel worktop

W 表原木桌板(訂單生產) Beech wood worktop

A 表模具平台(訂單生產) Worktop for MOLD&DIE

表耐衝擊桌板 Crack-resistant worktop

工作桌型號 Workbench type NO.