


SHAPE AND SIZE : TC-240-1A-3726

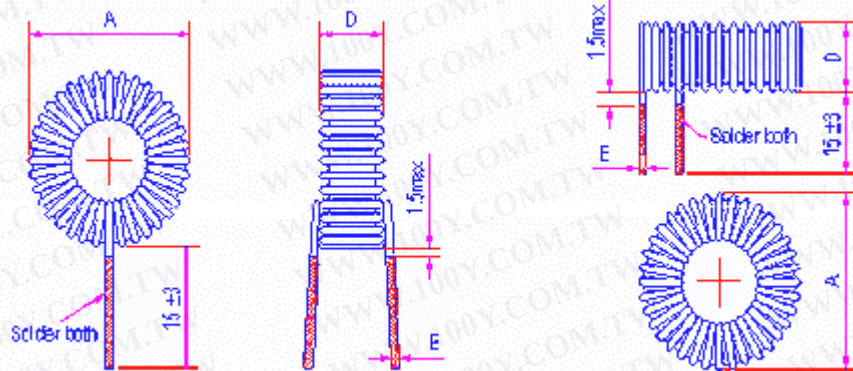

Features :

- Useful in a wide variety of power conversion and line filter applications .
- Wound on Iron Powder material toroids .
- COST-EFFECTIVE design .
- Low volume hand wound to high volume automatic machine wound .
- 130¢J UEW-NY wire .
- High saturation current .
- Coated with varnish .

Ordering information :

- (1)Type : Toroidal coils .
- (2)Inductance : Example : 101 for 100 uH
- (3)Inductance tolerance : J : $\pm 5\%$; K : $\pm 10\%$; M : $\pm 20\%$.
- (4)Rated current in Amps .
- (5)Core style : OD =0.5" .
- (6)Core material : " -26 " or " -92 " .

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Characteristics :

- (1) Inductance range : 1.0uH to 10000uH .
- (2) Current rating: Based on current density about 8.0 A / mm² .
- (3) Rated frequency : " -26 " : 50Hz ~ 100 KHz ; " -52 " : 10KHz ~ 500KHz .
- (4) Operating temperature : -55°C to 125°C .

- Test equipent :
L tested by LCR meter @ 1KHz .
DCR tested by Milliohm meter .

Applications :

- Power supplies .
- Switching Circuits .
- SCR and Triac Controls .
- Output chokes .
- EMI / RFI chokes .
- Other filters .