

- Push button switch(TBL)
- Illuminated push button switch
- Selector switch
- Pilot lamp
- Indicator
- Push button switch(TBFM)

TIB-252



TIB-302



TIBN-252



TIBN-302



TIBR-252



TIBR-302



TIBNR-252




TIBNR-302



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

•Model designations

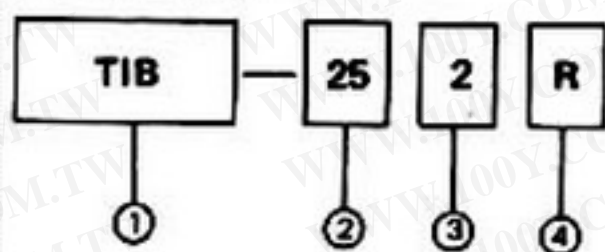

•Specifications

Alternate Current	AC125V	AC250V	AC500V	AC600V
	10A	6A	3A	2A
Direct Current	DC125V	DC250V		
	2A	1A		

Dielectric strength: AC2200V for duration of one minute.

Insulation resistance: Over 100Ω@DC500v.

Temperature rise :

At Contacts less than 30degrees.

At Terminals less than 25degrees.

(@Ambient temperature of 40°C, and a continuous current of 10amperes)

Contact resistance: Less than 30mΩ

Ambient temperature allowable: -20°C~+60°C

Designation	Signal	Description	
1. TYPE	TIB	Standard	
	TIBN	Standard(Neon lamp)	
	TIBR	With ring	
	TIBNR	with ring (Neon lamp)	
2.Mounting Hole	25	Φ25m/m	
	30	Φ30m/m	
3.Rated Voltage	1	100VAC	
	2	220VAC	
	3	380VAC	
	4	440VAC	
4.Lens color	5	6.3VAC(DC)	Without Transformer
	6	18VAC(DC)	
	7	24VAC(DC)	
	8	30VAC(DC)	
4.Lens color	R	Red	
	G	Green	
	O	Orange	
	W	White	