

## Pitch 5.00mm Poles 2p~24P




### Electrical:

Electrical:	cULus	VDE
Voltage rating:	300V	250V
Current rating:	15A	15A
Wire range:	2mm <sup>2</sup>	
Solid wire(AWG):	12-24	
Stranded wire(AWG):	12-24	
Torque (kgf.cm):	4	
Screw:	M3	
Wire strip length:	7~8mm	
Withstanding Voltage:	4KV	
Operating temperature:	-30 to +105	
Soldering temperature:	245	10 /5 Sec.

### Materials

Material:	
Terminal Body (metal housing):	Brass(CuZn)
Terminal screw:	Steel Yellow Chromated Zinc - " slot type.
Wire guard:	PhBz(CuSn)
Insulator (housing):	Thermoplastic (UL94V-0)

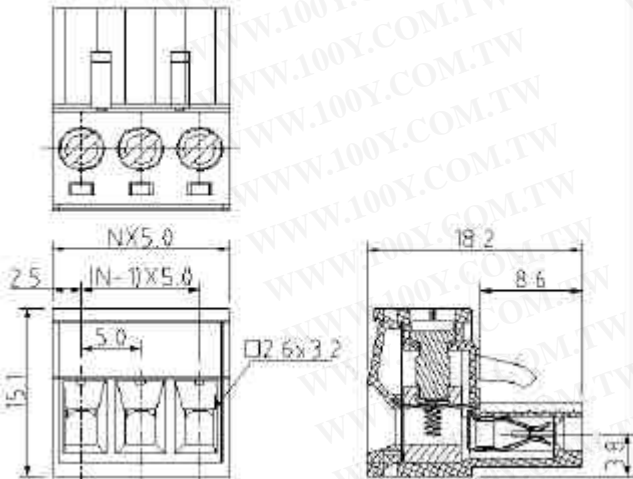

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### How to Order

TJ
XX X X X 0

Solid Block 03 3 contacts 02 2 contacts 24 24 contacts (pitch 5.0mm) ...	7 5.0/.197" 8 10.0/.394"	0 "-/+"Combination type W/Brass Machined Clamp 1 "-Slot type W/Brass Machined Clamp	0 Black 5 Green 6 Blue 8 Grey C 6018/T
--	-----------------------------	---	--

0 W/o flange 2 With flange

