

MODEL TL-2150

International size reference : 1/2AA,
ER14252

TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)

Nominal capacity @ 1mA TO 2V	0.95Ah
Rated voltage	3.6V
Maximum continuous current	50mA
Maximum pulse current capability	100mA
Rated 1 sec. pulse capability (to 3V)	20mA
Weight	9g (0.317oz.)
Operating temperature range	-55°C to +85°C





TADIRAN
LITHIUM
BATTERIES



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

AVAILABLE TERMINATIONS

U.L. Component recognition MH 12193	SUFFIX- /S	STANDARD
	SUFFIX- /P	AXIAL PINS
	SUFFIX- /T	SOLDER TABS
	SUFFIX- /PT2	RADIAL PINS
	SUFFIX- /PT/TP	POLARIZED TABS

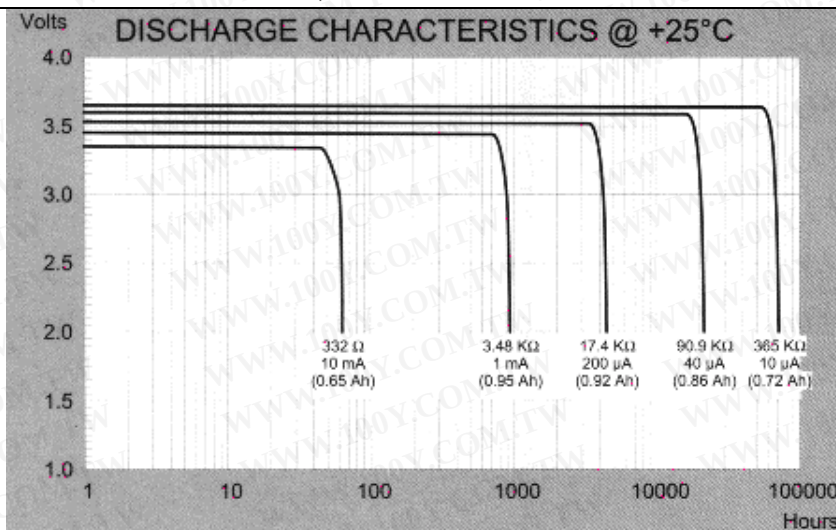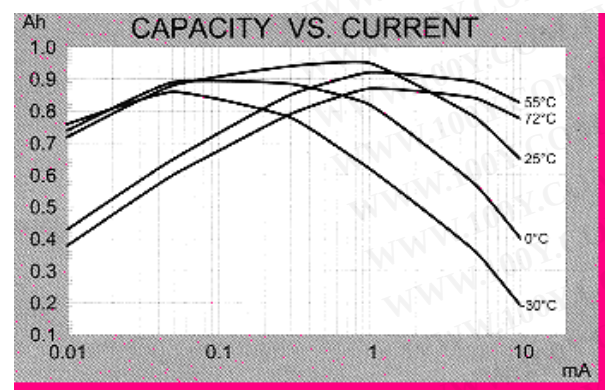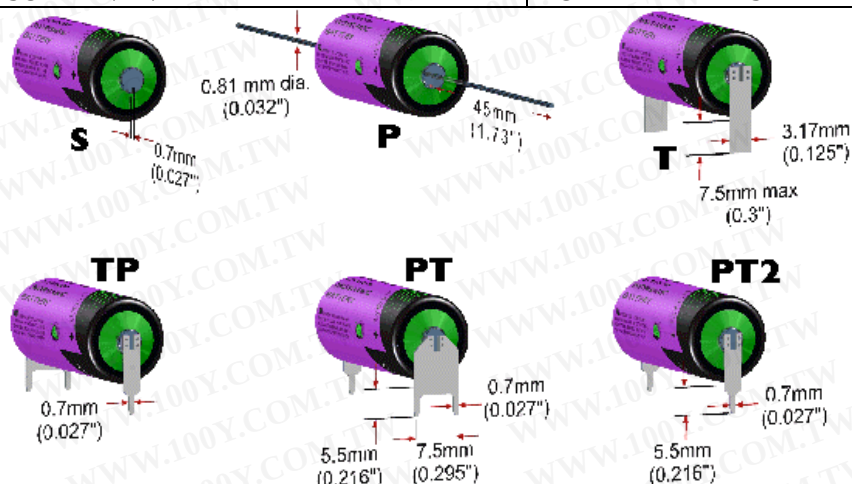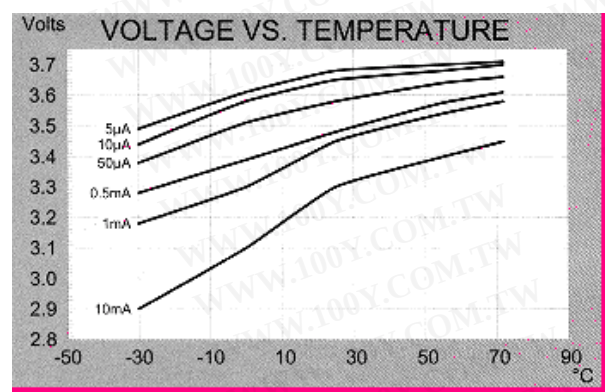

LITHIUM XTRA