

# MODEL TL-4935

International size reference: 1/6D, ER32L100


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TADIRAN LITHIUM BATTERIES

### TECHNICAL DATA




(Typical values @+25°C for batteries stored for one year or less)

|                                          |                  |
|------------------------------------------|------------------|
| ■ Nominal capacity @ 0.5 mA, to 2V       | 1.7 Ah           |
| ■ Rated voltage                          | 3.6 V            |
| ■ Maximum recommended continuous current | 10 mA            |
| ■ Maximum 1 sec. pulse capability        | 20 mA            |
| ■ Weight                                 | 21.5g (0.758 oz) |
| ■ Volume                                 | 8.2 cc           |
| ■ Operating temperature range            | -55°C to +85°C   |
| ■ U.L. Component Recognition, MH 12193   |                  |

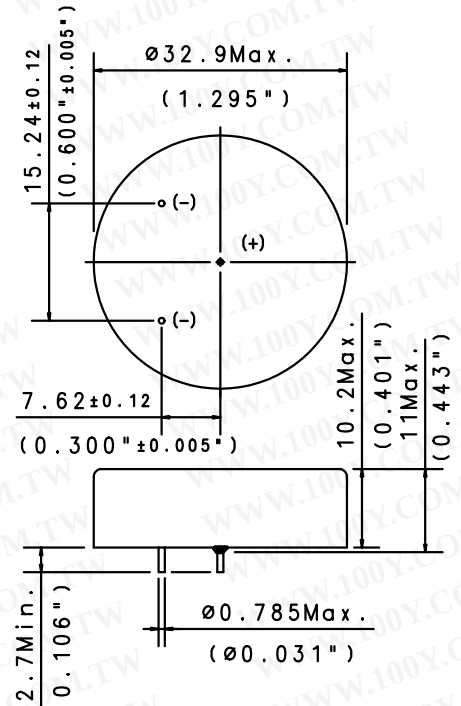

### ADDITIONAL INFORMATION

TERMINAL MATERIAL : TIN PLATED NICKEL  
CATALOGUE NO. : 15-4935-41000

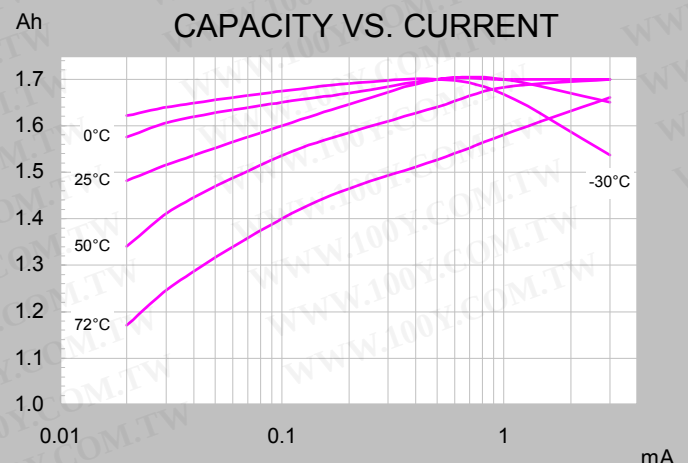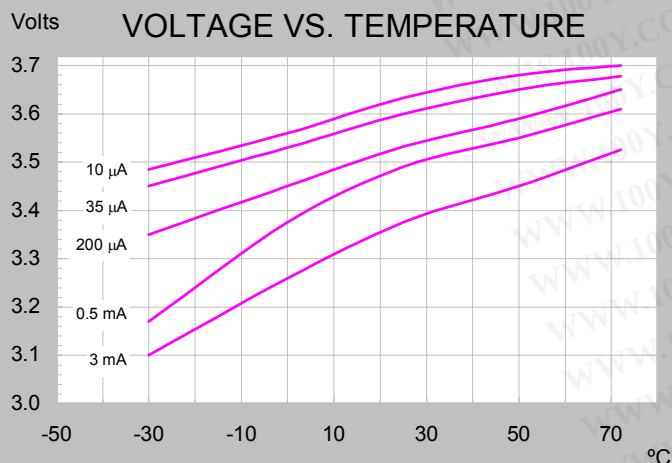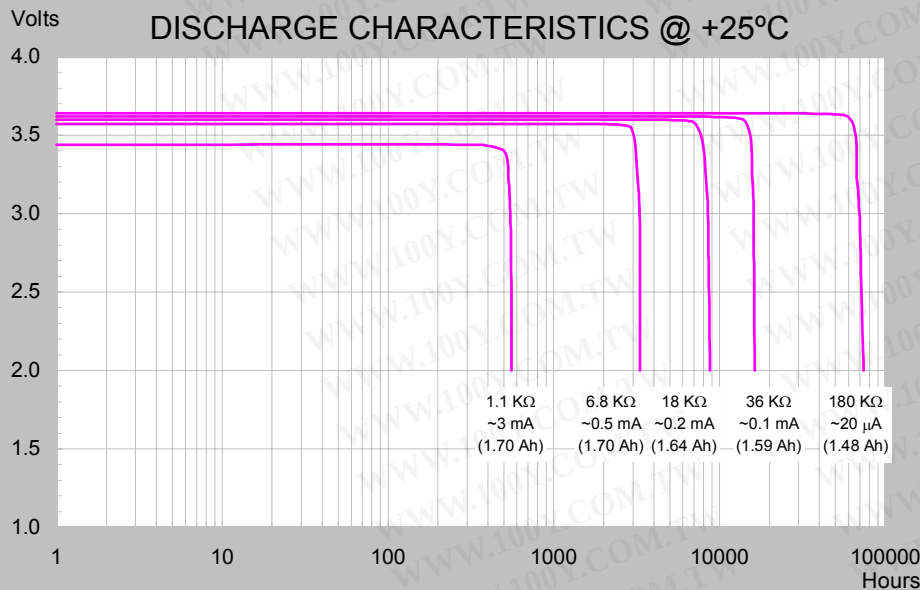

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. C 02/03