


MODEL TL-5902

International size reference : 1/2AA, ER14252




TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


| | |
|---------------------------------------|------------------|
| Nominal capacity @ 1mA TO 2V | 1.2Ah |
| Rated voltage | 3.6V |
| Maximum continuous current | 50mA |
| Maximum pulse current capability | 100mA |
| Rated 1 sec. pulse capability (to 3V) | 20mA |
| Weight | 9.2g (0.324 oz.) |
| Operating temperature range | -55°C to +85°C |

U.L. Component recognition MH 12193

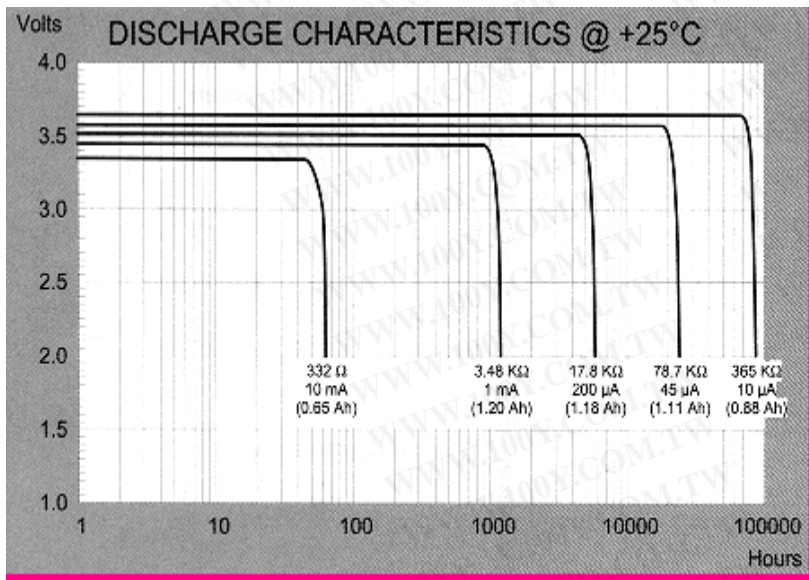

AVAILABLE TERMINATIONS

| | |
|----------------|----------------|
| SUFFIX- /S | STANDARD |
| SUFFIX- /P | AXIAL PINS |
| SUFFIX- /T | SOLDER TABS |
| SUFFIX- /PT2 | RADIAL PINS |
| SUFFIX- /PT/TP | POLARIZED TABS |

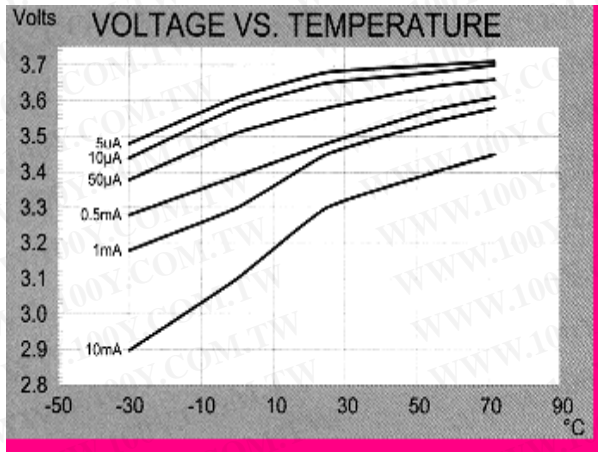

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

