

# MODEL TL-5903

International size reference : AA, ER14505



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TECHNICAL DATA


(Typical Values @+25°C for batteries stored for one year or less)

Nominal capacity @ 2 mA TO 2V	2.4Ah
Rated voltage	3.6V
Maximum continuous current	100mA
Maximum pulse current capability	200mA
Rated 1 sec. pulse capability (to 3V)	40mA
Weight	17.6g (0.62 oz.)
Operating temperature range	-55°C to +85°C

U.L. Component recognition MH 12193

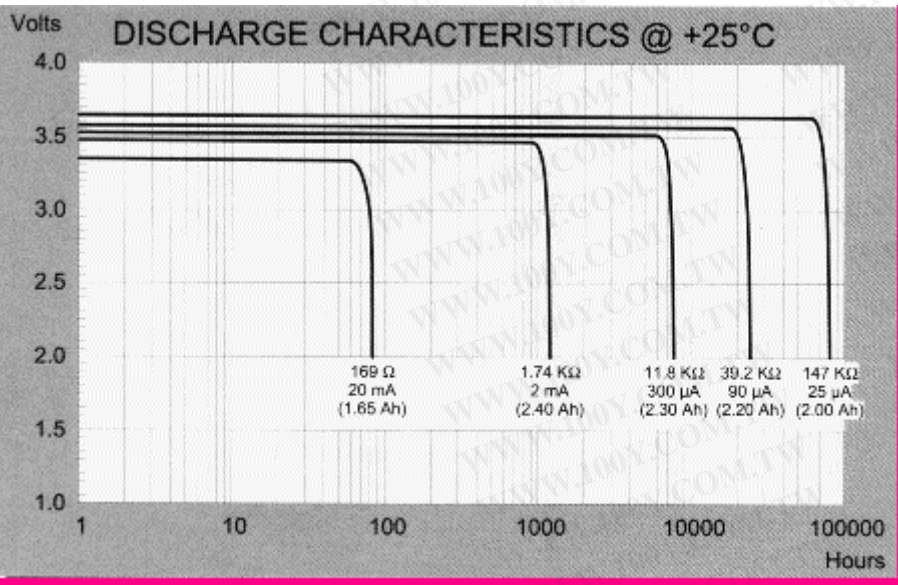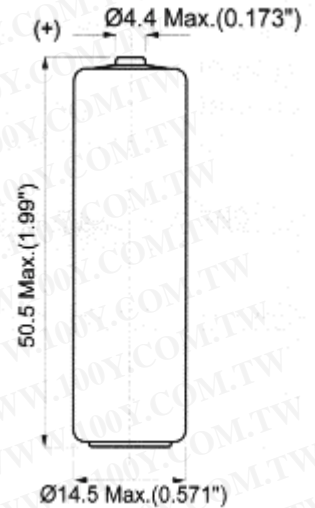

AVAILABLE TERMINATIONS	
SUFFIX- /S	STANDARD
SUFFIX- /P	AXIAL PINS
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS
SUFFIX- /PT/TP	POLARIZED TABS

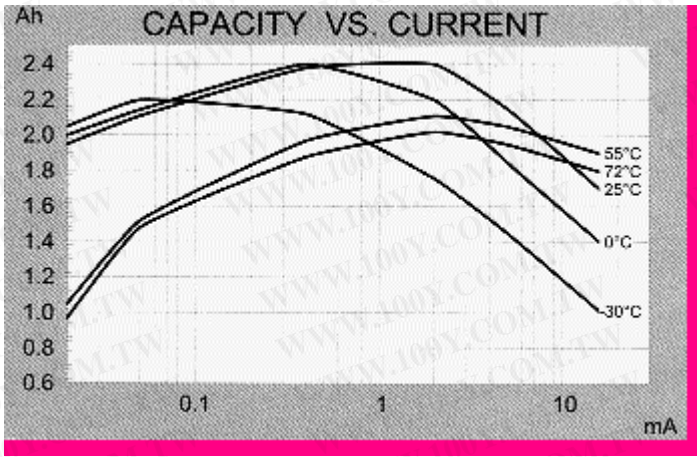

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)