


SPECIFICATIONS:

RATING: 30VDC 500mA.
 OPERATING FORCE: 50gf max.
 LIFE: 100,000 cycles min.
 CONTACT RESISTANCE: 100MΩ max (initial).
 INSULATION RESISTANCE: 100MΩ min (250VDC).
 DIELECTRIC STRENGTH: 500VAC 1 min.
 OPERATING TEMPERATURE: -15°C~+70°C.
 AMBIENT HUMIDITY: 35%~85%RH.

MATERIALS:

TERMINAL: Brass, silver plated.
 BODY: PBT.
 COVER: POM.
 LEVER: PBT.
 PIN: POM.
 CONNECT: BeCu.
 CONTACT: Silver.


SSM-00

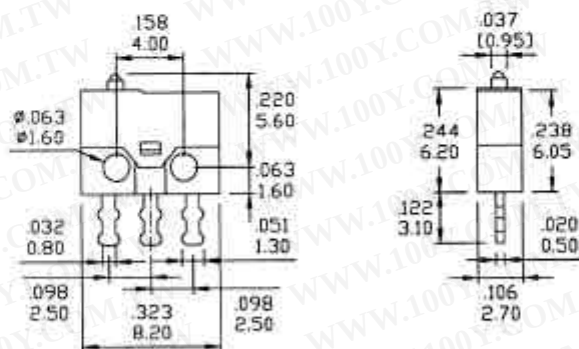


SCHEMATIC



SSM-01

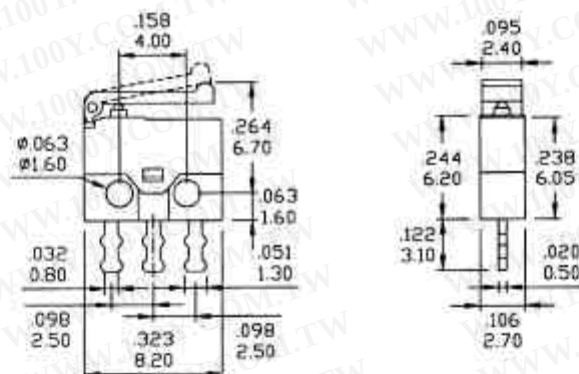


SCHEMATIC




TERMINAL OPTIONS


P TYPE



C TYPE

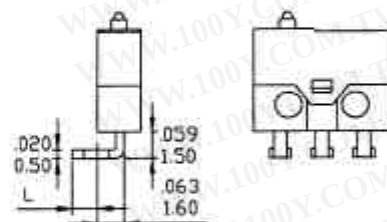

D TYPE

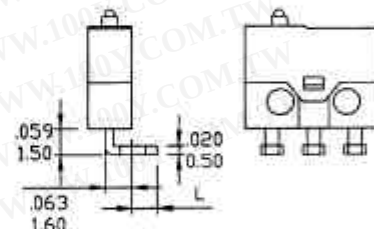

HOW TO ORDER

