

Product Description :


- Stranded, tinned or bare copper conductor.
- Color-coded PCV insulation.
- UL1028: Rated temp. 105° C. Rated voltage: 600 Volts.
- UL1032: Rated temp. 90° C. Rated voltage: 1000 Volts (VDC).
- Uniform thickness of wire to ensure easy stripping and cutting.
- Resistant to acids, oils, alkalies, moisture and fungus.
- Passes UL VW-1 vertical flame test.

Applications :

For internal wiring of appliances .

Construction :

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

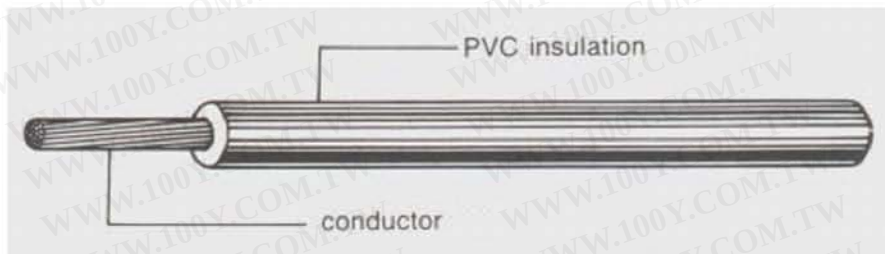

UL Style & CAS Type	Conductor		Insulation Thickness	Overall Diameter	Standard Put-Up		Conductor Resistance at 20°C
	AWG	No./mm	Mm	Mm	ft/coil	M/coil	Ohm/kft
UL 1028 CSA I A	22	17/0.160	1.19	3.15± 0.1	1000	305	16.70
	20	21/0.180		3.35± 0.1	1000	305	10.50
	18	34/0.180		3.60± 0.1	1000	305	6.64
	16	26/0.254		3.90± 0.1	1000	305	4.18
	14	41/0.254		4.30± 0.1	500	152	2.62
	12	65/0.254		4.75± 0.1	500	152	1.65
	10	105/0.254		5.70± 0.15	500	152	1.04
	8	119/0.30		6.65± 0.15	500	152	0.66
UL 1032 CSA I A	24	11/0.160	0.78	2.20± 0.1	2000	610	29.30
	22	17/0.160		2.40± 0.1	2000	610	16.70
	20	21/0.180		2.55± 0.1	2000	610	10.50
	18	34/0.180		2.80± 0.1	2000	610	6.64