

USB/B 4P FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC





VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO. SPECIFICATION


USBF-04 * N - * R 0 5

W : WHITE
 B : BLACK
 1 : Au 1U"
 6 : Au 30U"


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



P.C.B LAYOUT



USBF-04 * N - * R00



WITHOUT COVER
USBF-04 * N - * R06

USB/B 4P FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY



ELECTRICAL CHARACTERISTIC





VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO. SPECIFICATION

USBF-04 * N - * R 0 3

W : WHITE
 B : BLACK
 1 : Au 1U"
 6 : Au 30U"

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




P.C.B LAYOUT
(BOTTOM VIEW)

USB B TYPE FEMALE CONNECTOR

USB/B 4P FEMALE/SMT TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC,UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY

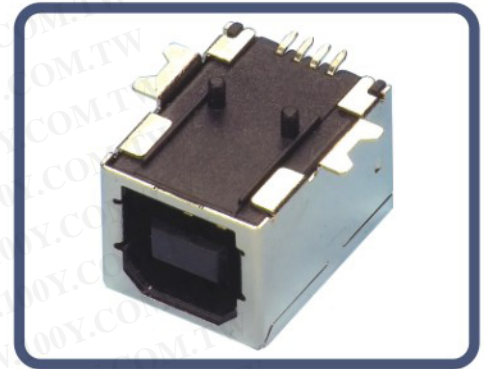

ELECTRICAL CHARACTERISTIC





VOLTAGE CURRENT RATING	1AMP,30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO.SPECIFICATION

USBF-04*N-*V30

W : WHITE
 B : BLACK
 1 : Au 1U"
 6 : Au 30U"

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

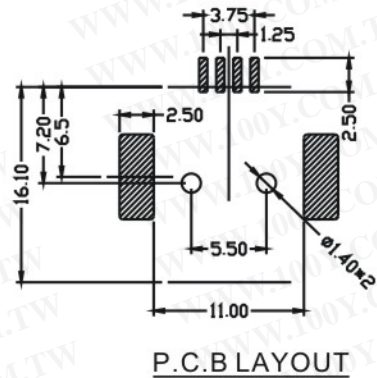

USB/B 4P FEMALE/180° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC,UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY
COVER	THERMOPLASTIC,UL94V-0



ELECTRICAL CHARACTERISTIC


VOLTAGE CURRENT RATING	1AMP,30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C

PART NO.SPECIFICATION

USBF-04 * N - * P00



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

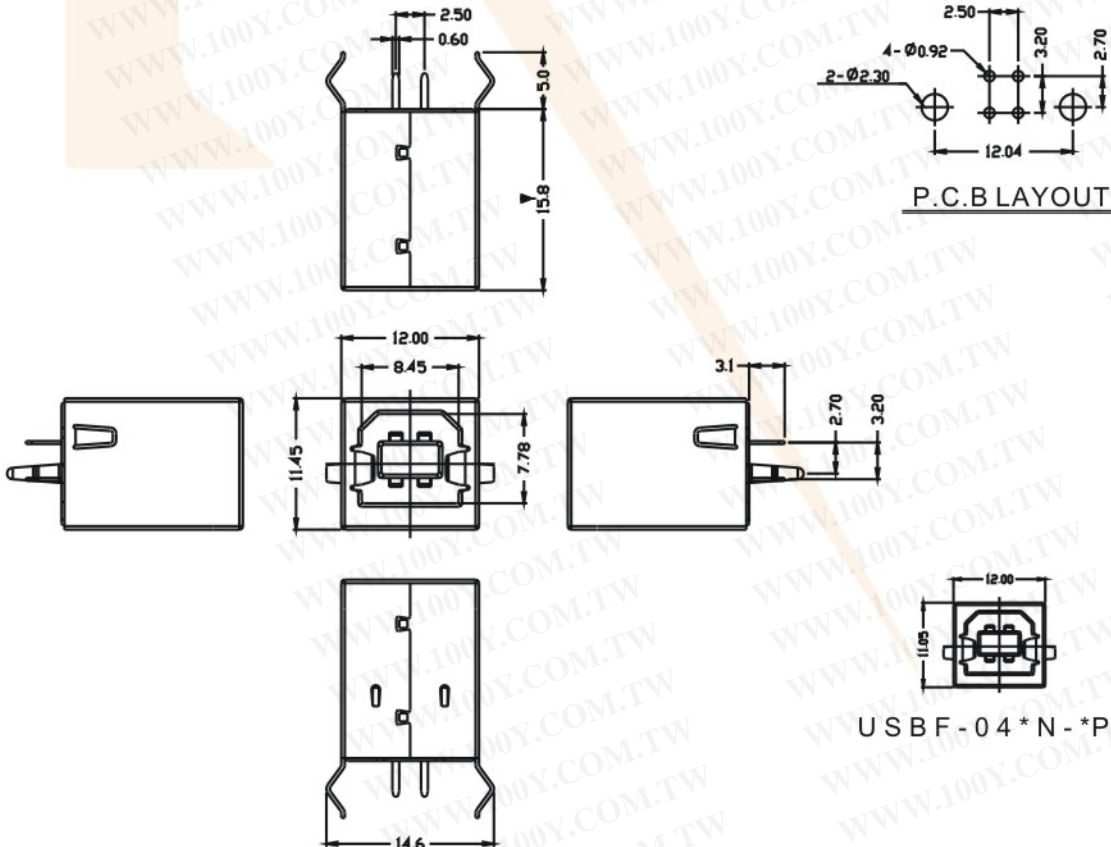

USB B TYPE FEMALE CONNECTOR