

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Technical data: 745-302

PCB TERMINAL STRIP; 2 SOLDER PINS / POLE; 2 POLE; PIN SPACING 7.5 MM / 0.295 IN; WITHOUT FIXING FLANGE; FRONT-ENTRY

Packing unit 128 pieces

Product group	4 (Printed Circuit)
Pin spacing from	7,5 mm
Pin spacing from	0,295 in
pole count	2
Cross section from [mm²]	0,2 mm²
Cross section to [mm²]	6 mm²
Cross section from [AWG]	24 AWG
Cross section to [AWG]	10 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	10,185 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	23 mm
Height	0,906 in
Width	16,6 mm
Width	0,653 in
Depth	29,1 mm
Depth	1,15 in
Strip length from	11 mm
Strip length to	12 mm
Strip length	0,45 in

Produktbild zur Artikelnummer

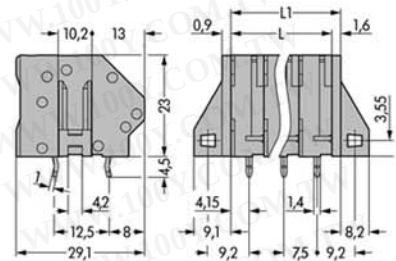

Bohrlochdurchmesser: 1,8+0,1 mm

$L = (\text{Polzahl} - 1) \times \text{Rastermaß} + 7,5 \text{ mm}$

$L1 = L + 1,6 \text{ mm} = \text{Ausführung ohne Befestigungsflansch}$

Technical data:

Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
	CCA	NL5832	630	41	0,02-6
	cURus	E45172	300	30	24-10"s"/"str"
	ENEC15	DK131096-01	400	32	0,5-6
	KEMA	2076500.02	630	41	0,02-6

Sorting criteria: admission office - approval number