




勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**SIP/SLA 5.2 x 20mm, 125V/250V, Time Lag, Glass Tube Fuses with Pigtail,  
UL/CSA/PSE Approved**

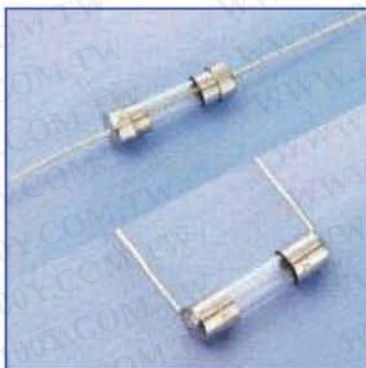

**Key Specifications/Special Features:**

- RoHS compliance
- **Rating/voltage:>**
  - SIP:  
100mA to 5A, 125V/250V
  - SLA:  
100mA to 3A, 125V/250V  
3.15A to 7A, 125V
- **Electrical properties:**  
Load opening time:
  - 135%: 1 hour max.
  - 200%: 120S max.
  - 1000%: 10mS min.
- **Breaking capacity:**
  - 10,000A: 125VAC
  - 35A: 250VAC (less or 1A)
  - 100A: 250VAC (1.1A to 3.5A)
  - 200A: 250VAC (3.6A to 10A)
- **Temperature characteristics:**
  - When 100% of rating, temperature rise does not exceed 75 degrees Celsius
- **Structure:**
  - Wire: alloy
  - Cap: brass with nickel plated
  - Body: glass tube
  - Lead: tinned copper wire
- **UL/CSA/PSE:**
  - SIP:  
100mA to 5A, 125V/250V
  - SLA:  
100mA to 3A, 125V/250V  
3.15A to 7A, 125V