

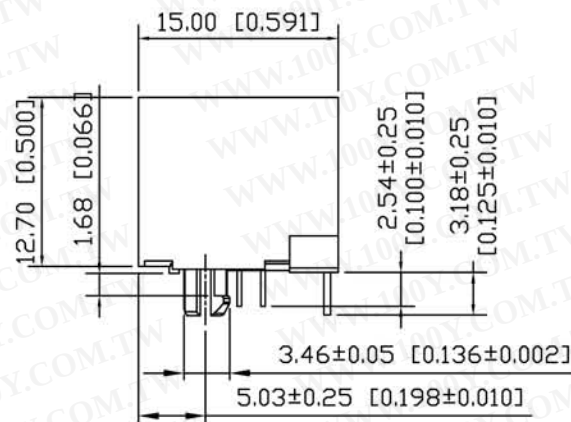


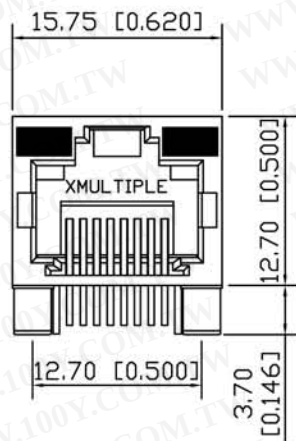

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

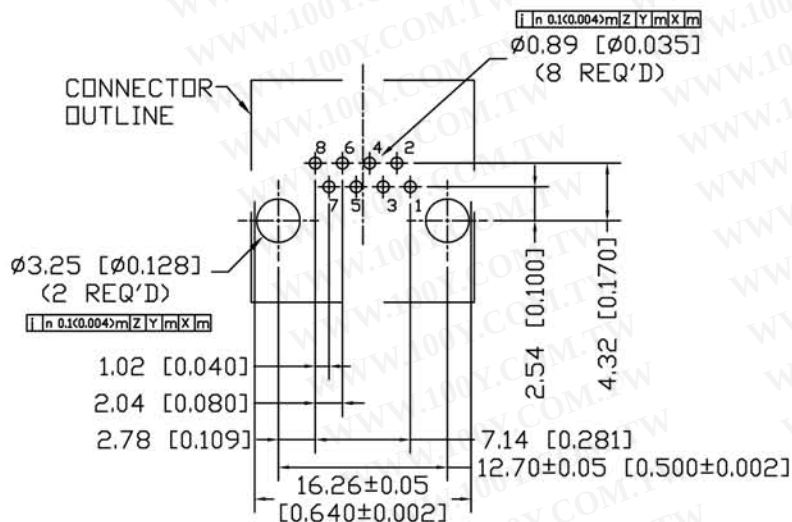

XRJM-U-01-8-8-0-002

Shielded Plating Type
 S SHIELDED
 U Unshielded

NO. OF CONTACT
 NO. OF POSITION
 NO. OF PORTS

M-[Thru Hole]

CODE	LED 2 [LEFT]	LED 1 [RIGHT]
0	BLOCKED	BLOCKED
1	YELLOW	GREEN
2	BLOCKED	GREEN
3	YELLOW	BLOCKED
4	GREEN	YELLOW
5	GREEN	GREEN
6	YELLOW	YELLOW
7	OR/GR	OR/GR
8	YE/GR	YE/GR
9	OR/GR	YELLOW

SUGGESTED PCB LAYOUT TOLERANCE
 .XX±0.05[0.002]

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
 CONTACTS: T=0.35 mm PHOSPHOR BORNEZ, 50u" NICKEL UNDERPLATE
 ON ALL AREA, 150u" TIN-LEAD ON TERMINATION END,
 15u" GOLD ON CONTACT AREA.
 SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH 30u" NICKEL
 ON TERMINATION END.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010] .X ±0.30[0.012]

CONNECTING THE INFORMATION AGE			
THIS DRAWING IS A CONTROLLED DOCUMENT.			CUSTOMER/NO
TITLE: RJ45 Connectors, W/D LED, 8P, 8C, Unshielded, Thru-Hole	PART NO: XRJM-U-01-8-8-0-002		DWG NO: XRJM-U-01-8-8-0-002
DATE: 06/11/03	REV: 01		DRAWN: TARA
DIMENSIONS: mm[inch]		SHEET: 1 of 1	
CHKD: C. TSAI		DATE: 06/11/03	