




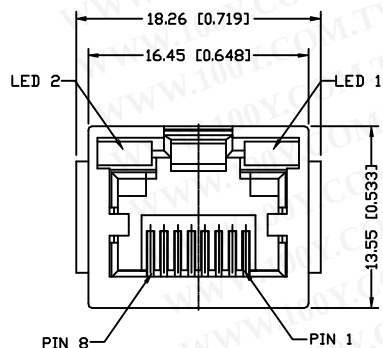

FRONT VIEW

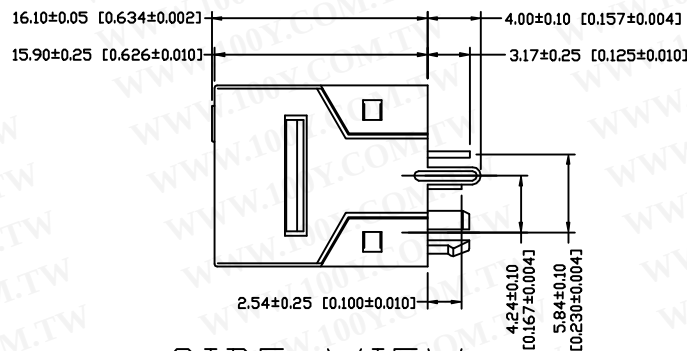

SIDE VIEW

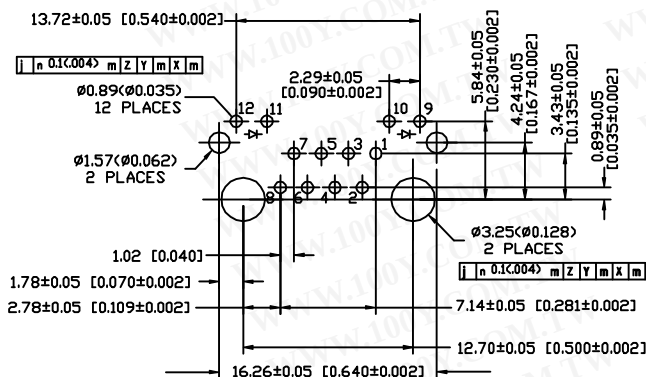

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

1. MATERIALS:

HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA.
15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA.
ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
SHIELDED: 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICROINCHES (0.762 MICROMETERS) MINIMUM THICK NICKEL

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

3. PART NUMBER: XRJV-S-01-8-8-X



REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES:

UNLESS OTHERWISE SPECIFIED

UNSPECIFIED TOLERANCE: .XX ± 0.010 [0.25]

.X ± 0.006 [0.15]

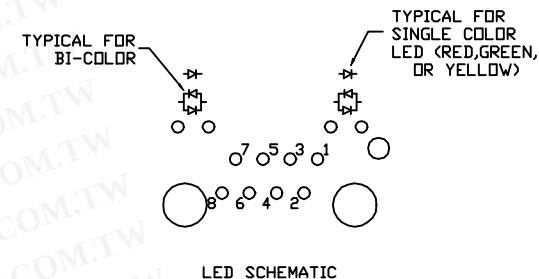

BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CONNECTING THE INFORMATION AGE			
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: RJA5 Jack,V/LED,8P,BC,Shielded,Vertical Mount,Thru-Hole	DATE: PDV0723	DRAWN: VIQ	
PART NO: XRJV-S-01-8-8-X	REV: C.TSAI	DATE: 07/24/01	
	DIMENSIONS	SHEET	REV
	mm [inch]	1 of 1	J