

XS10型，系列：2、3、4、5芯
XS10 TYPE SERIE: 2、3、4、5 CORE



XS10使用条件

环境温度: $-55 \sim +100^{\circ}\text{C}$

相对湿度: $+40^{\circ}\text{C}$ 达98%

大气压力: 达1KPa

振动: 振频10-200HZ 150M / S²

碰撞: 加速度500M / S²

离心: 加速度500M / S²

XS10Working condition

Environment temperature: $-55 \sim +100^{\circ}\text{C}$

R.H: up to 98% when temperature is $+40^{\circ}\text{C}$

Atmospheric pressure: up To 1KPa

Vibration: vibration frequency is 10-200HZ 150m/s²

Impact: acceleration up to 500m/s²

Centrifugal up to 500m/s²






XS10型圆、方卡扣式
 XS10 TYPE Square/Round snap-fast

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

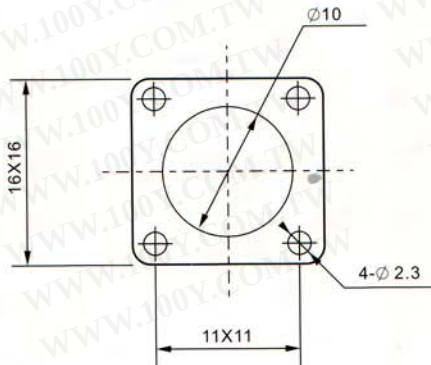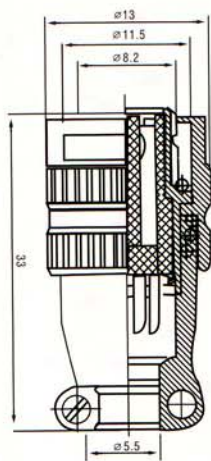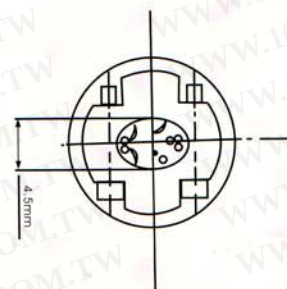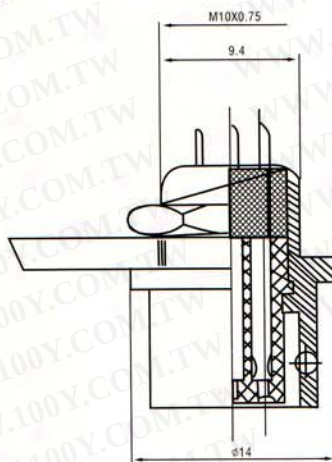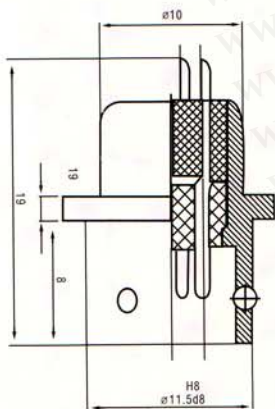

安装尺寸图 INSTALL HATCH SIZE