


NON-INSULATED RING TERMINALS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

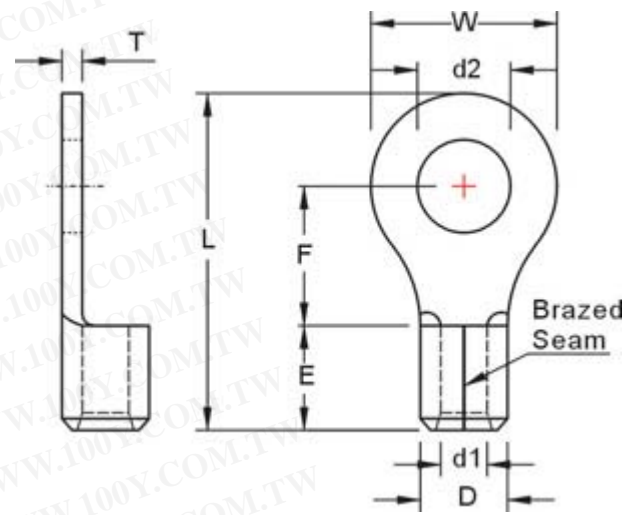

RE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch(mm)	Q'TY BOX
	BRAZED SEAM	BUTTED SEAM		d2	W	
22-16 A.W.G.	RNB1-2.5	RN1-2.5	#2	0.095 2.4	0.217 5.50	1000
0.5-1.5 mm ²	RNB1-7	RN1-7	5/16	0.291 7.4	0.457 11.60	1000
	RNBL1-10	RNL1-10	3/8	0.413 10.5	0.756 19.20	1000
	RNB1-3.2	RN1-3.2	#4	0.126 3.2	0.217 5.50	1000
	RNBS1-3.7	RNS1-3.7	#6	0.146 3.7	0.217 5.50	1000
	RNBM1-3.7	RNM1-3.7	#6	0.146 3.7	0.260 6.60	1000
	RNBL1-3.7	RNL1-3.7	#6	0.146 3.7	0.315 8.00	1000
	RNBS1-4	RNS1-4	#8	0.169 4.3	0.260 6.60	1000
	RNBL1-4	RNL1-4	#8	0.169 4.3	0.315 8.00	1000
	RNB1-5	RN1-5	#10	0.209 5.3	0.315 8.00	1000
	RNBL1-5	RNL1-5	#10	0.209 5.3	0.457 11.60	1000
	RNB1-6	RN1-6	1/4	0.252 6.4	0.457 11.60	1000
	RNB1-8	RN1-8	5/16	0.331 8.4	0.457 11.60	1000
	RNB1-10	RN1-10	3/8	0.413 10.5	0.535 13.60	1000

RNB1-12	RN1-12	1/2	0.512 13	0.756 19.20	1000
RNB1-13	RN1-13	9/16	0.551 14	0.756 19.20	1000
RNB1-14	RN1-14	9/16	0.591 15	1.063 27.00	1000
RNB1-16	RN1-16	5/8	0.669 17	1.063 27.00	1000
RNB1-20	RN1-20	3/4	0.827 21	1.063 27.00	1000
RNB2-2	RN2-2	#2	0.087 2.2	0.260 6.60	1000
RNB2-7	RN2-7	5/16	0.291 7.4	0.472 12.00	1000
RNBL2-10	RNL2-10	3/8	0.413 10.5	0.756 19.20	1000
RNBS2-3.2	RNS2-3.2	#4	0.126 3.2	0.217 5.50	1000
RNB2-3.2	RN2-3.2	#4	0.126 3.2	0.260 6.60	1000
RNBL2-3.2	RNL2-3.2	#4	0.126 3.2	0.335 8.50	1000
RNBS2-3.7	RNS2-3.7	#6	0.146 3.7	0.260 6.60	1000
RNBM2-3.7	RNM2-3.7	#6	0.146 3.7	0.260 6.60	1000
RNBL2-3.7	RNL2-3.7	#6	0.146 3.7	0.335 8.50	1000

16-14
A.W.G.
1.5-2.5
mm²