

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2003

© COPYRIGHT 2003

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

A

-

EGC0-0193-04

07.09.2004

Witt


-

Matrize in Kombination mit Ergocrimp Basishandzange PN 539635-1 verwenden
Use die in combination with Ergocrimp basis hand tool PN 539635-1

Matrize im Karton mit Bedienungsanleitung 411-18284 verpackt
Die packed in a cardboard with instruction sheet 411-18284

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3-1579001-5	1	5-0744010-1	Instruction Sheet	Bedienungsanleitung	6
	1	0-0519024-2	Nut M4 DIN 985	Mutter M4 DIN 985	5
	1	1-0519151-3	Screw M4x25	Schraube M4x25	4
	1	1-0519151-1	Screw M4x16	Schraube M4x16	3
	1	8-1579005-9	Locator Assembly	Drahtanschlag	2
	1	8-1579005-4	Contact Locator	Kontaktpositionierer	1
	QTY	PN	Description	Benennung	Pos.
	Stck				

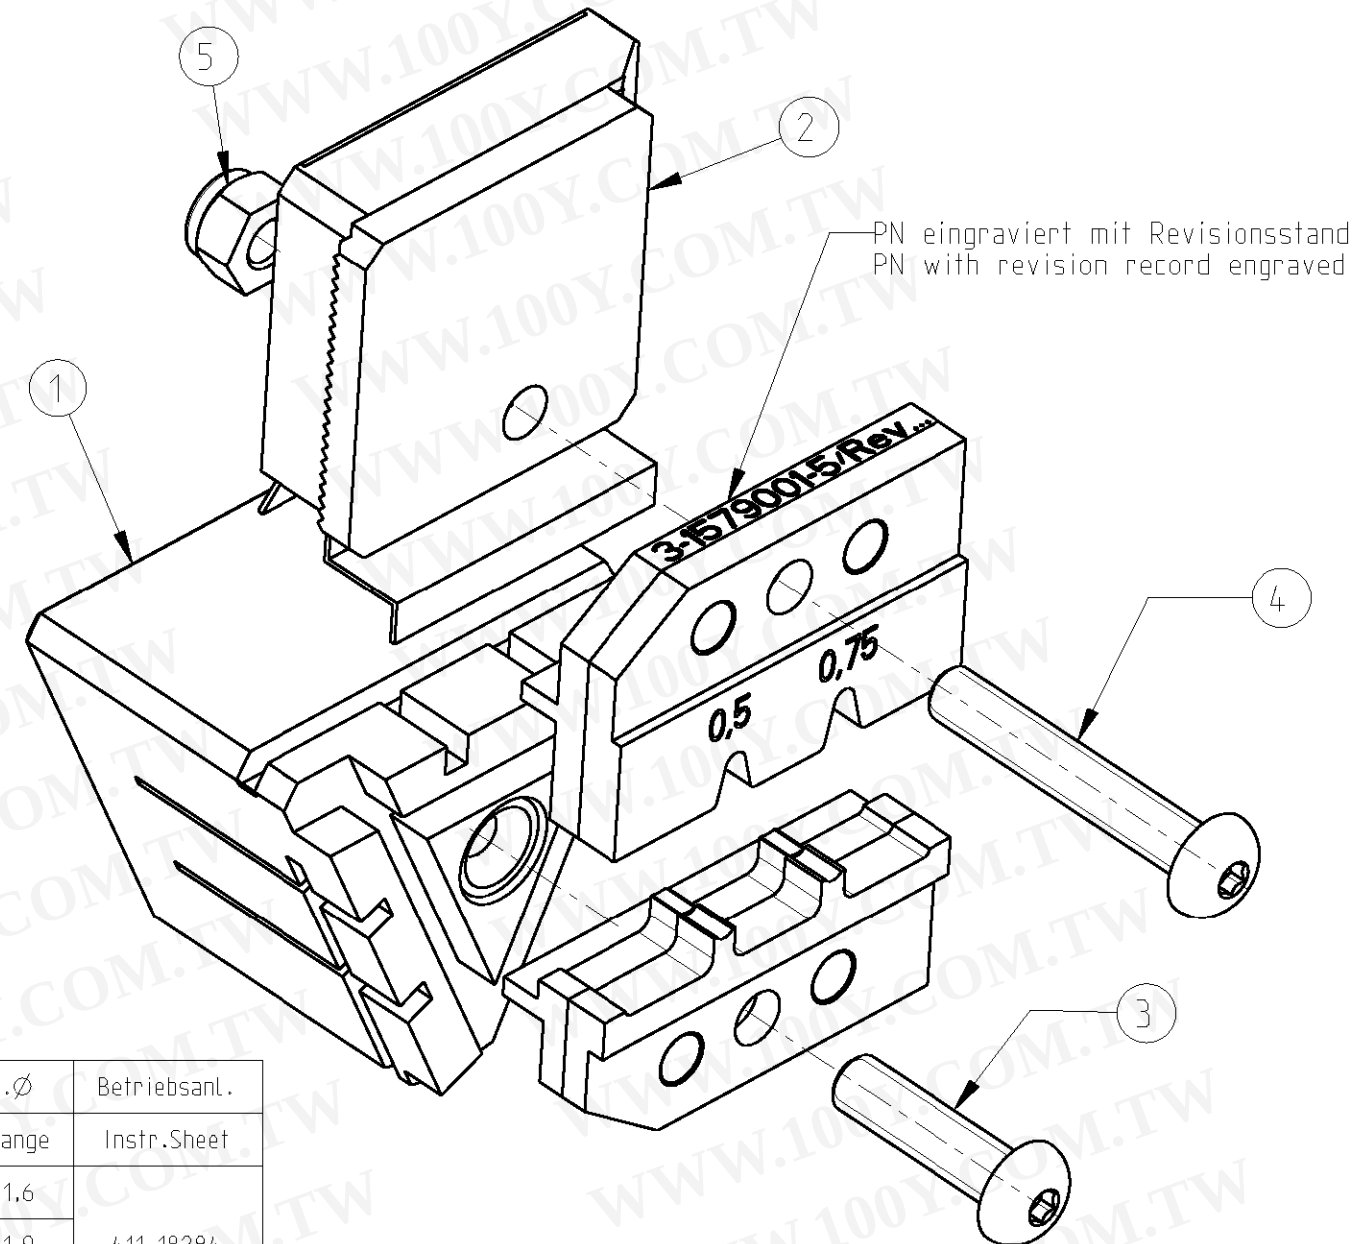


Kontakt	DGB (mm²)	Drahtcrimp / Wire Crimp		Isolationscrimp/Insulationcrimp		Isol.Ø	Betriebsanl.
Contact	Wire Range	Hoehe/Height mm	Breite/Width mm	Hoehe/Height mm	Breite/Width mm	Ins.Range	Instr.Sheet
963729 / 963730 968221 / 1241921 1452014	0.50	0.93 ±0.03	1.40	1.7 ±0.1	2.03 ±0.1	1.4-1.6	411-18284
	0.75	1.07 ±0.03		2.05 ±0.1		1.7-1.9	
	-----	-----		-----		-----	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm



MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC

±

1 PLC

±

2 PLC

±

3 PLC

±

4 PLC

±

ANGLES

±°

FINISH

-

DWN Ch.Witt 07SEP2004

CHK

-

APVD

-

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

tyco
Electronicstyco Electronics AMP GmbH
D - 64625 Bensheim

NAME

ERGOGRIMP-DIE SET
Ergocrimp Matrize

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-3-1579001-5

-

SCALE 2:1

SHEET 1 OF 1

REV A