

DC/AC Power Inverter


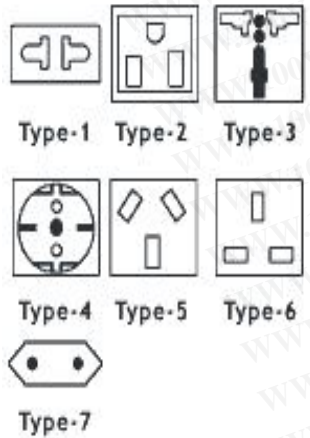

ONEUTTER

Modified Sine Wave - 3000 & 3300 Watt

DC to AC Power Inverter features:

- Compact Size, Light Weight & High Efficiency
- Low Battery Auto Shutdown
- Low Battery Alarm
- Overload and Short Circuit Protection
- Input Polarity Reverse Protection by Fuse
- High Surge Current Capacity. Easy to Start for TV, Motors & Other Inductive Load

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

	Model Number	KV - 3300	KV - 3000
	Specifications		
	Voltage In	12VDC or 24VDC	
	Voltage Out	115VAC	220V, 230V, 240VAC
<p>OUTPUT RECEPTACLES</p>  <p>Type-1 Type-2 Type-3 Type-4 Type-5 Type-6 Type-7</p>	Continuous Power	3300 W	3000 W
	Peak Power	6600 W	6000 W
	Output Frequency	60Hz +/- 3Hz	50Hz or 60Hz +/- 3Hz
	No Load Current Draw	2.5 A	2.5 A
	Efficiency	> 80%	> 80%
	Fuse	40A x 8	40A x 8
	Cooling Fan	Cooling Fan x 2 pcs	Cooling Fan x 2 pcs
	Weight	5.0 Kg	5.0 Kg
	Dimension	440 x 190 x 95mm (LxWxH)	