


大功率不燃性電阻 Non Flammable Wire Wound Resistor

QR series ◆大功率,低阻值型 . High Power, Low Resistance Type

QR type : 固定電阻, Fixed Resistor

SQR type : 可調電阻, Adjustable Resistor

NQR type : 無感電阻, noninductive Resistor

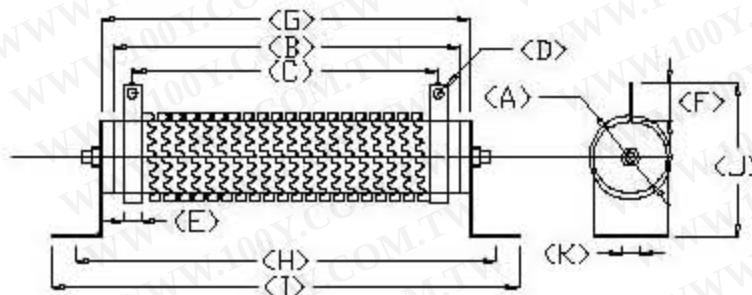

規格表 Spec.

定格電力 (W) Power Rating	尺寸 Dimensions (mm)											電阻值範圍 (Ω) Resistance Range
	A±1	B±2	C±2	D±0.1	E±0.2	F±1	G±2	H±2	I±2	J±2	K±0.1	
QR- 75W	25	110	92	5.2	8	19	120	142	164	58	6	0.1Ω ~ 8Ω
QR- 90W	28	90	74	5.2	8	17	101	123	145	60	6	0.1Ω ~ 9Ω
QR- 120W	28	110	94	5.2	8	17	121	143	165	60	6	0.2Ω ~ 12Ω
QR- 150W	28	140	124	5.2	8	17	151	173	195	60	6	0.2Ω ~ 15Ω
QR- 180W	28	160	144	5.2	8	17	171	193	215	60	6	0.2Ω ~ 18Ω
QR- 225W	28	195	179	5.2	8	17	206	229	250	60	6	0.2Ω ~ 20Ω
QR- 240W	35	185	167	5.2	8	18	197	219	245	75	8	0.5Ω ~ 25Ω
QR- 300W	35	210	192	5.2	8	18	222	242	270	75	8	0.5Ω ~ 30Ω
QR- 375W	40	210	180	5.2	10	19	222	242	270	77	8	0.5Ω ~ 40Ω
QR- 450W	40	260	230	5.2	10	19	272	292	320	77	8	0.5Ω ~ 45Ω
QR- 600W	40	330	300	5.2	10	19	342	380	390	77	8	0.5Ω ~ 60Ω
QR- 750W	50	330	300	6.2	12	26	346	367	400	105	9	0.5Ω ~ 75Ω
QR- 900W	50	400	370	6.2	12	26	416	437	470	105	9	1Ω ~ 90Ω
QR-1000W	50	460	425	6.2	15	26	480	505	533	105	9	1Ω ~ 100Ω
QR-1200W	60	460	425	6.2	15	28	480	505	533	112	10	1Ω ~ 120Ω
QR-1500W	60	540	505	6.2	15	28	560	585	613	112	10	1Ω ~ 150Ω
QR-2000W	65	650	615	6.2	15	30	667	690	720	130	10	1Ω ~ 200Ω