


## 型號說明

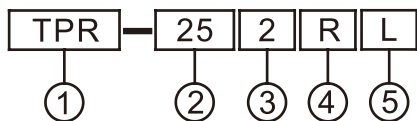

## 燈泡規格


指示燈型式	燈泡型式		
Ø25m/m TPR TPF系列 TPS	E-10	6.3V	0.15A
	E-10	24V	1W
	E-10	30V	1W
Ø30m/m TPR TPF TPS系列 TPL	E-12	18V	0.11A
	E-12	24V	2W
	E-12	30V	2W

耐電壓	2,000VAC, 50/60HZ 持續1分鐘
絕緣電阻	100MΩ 以上 (在500VDC)


項次	代號	說明	
1. 型式	TPR	圓型	
	TPS	方型	
	TPF	平頭型	
	TPL	大頭型	
	TPRF	閃光圓型	
	TPSF	閃光方型	
	TPLF	閃光大頭型	
2. 固定孔徑	25	Ø25m/m	
	30	Ø30m/m	
3. 額定電壓	1	110VAC	
	2	220VAC	
	3	380VAC	
	4	440VAC	
	5	6.3VAC(DC)	
	6	18VAC(DC)	
	7	24VAC(DC)	
	8	30VAC(DC)	
4. 燈殼顏色	R	紅	
	G	綠	
	O	橙	
	W	白	
	BL	藍	
5. 燈泡種類	空白	鎢絲燈泡	
	L	LED燈泡	

## 外觀尺寸


### TPR-252

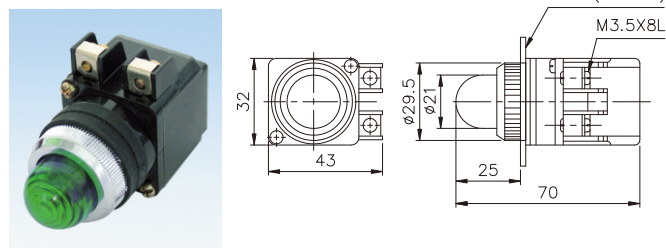


### TPR-302

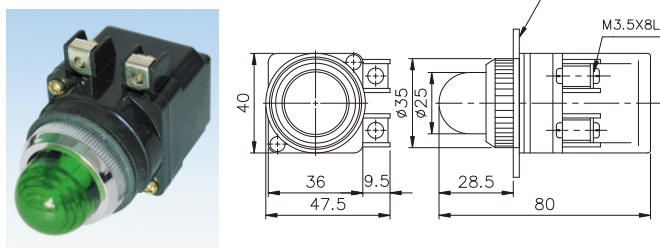


### TPS-252

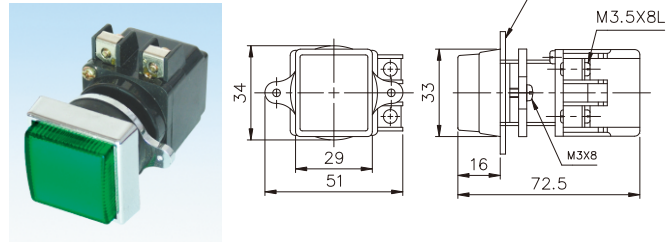


### TPS-302

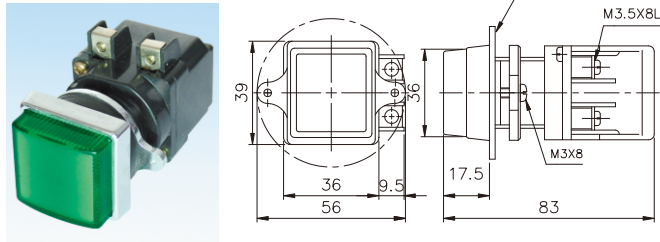


### TPF-252

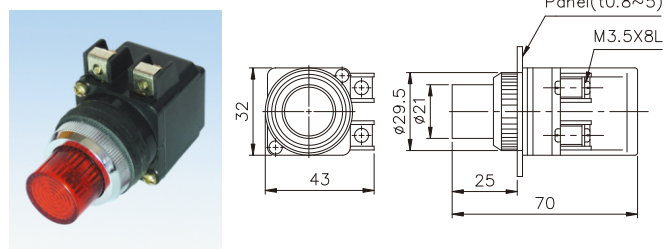


### TPF-302

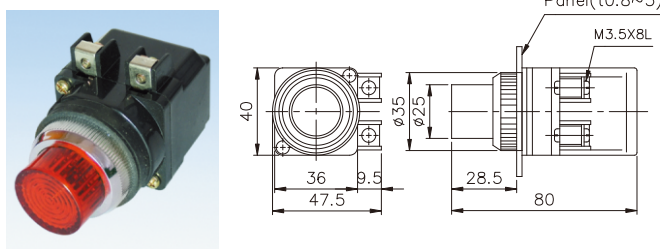


### TPRR-252

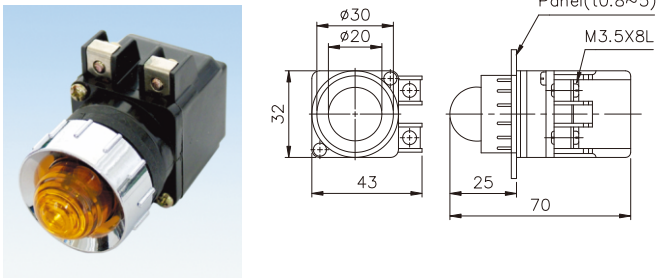


### TPRR-302

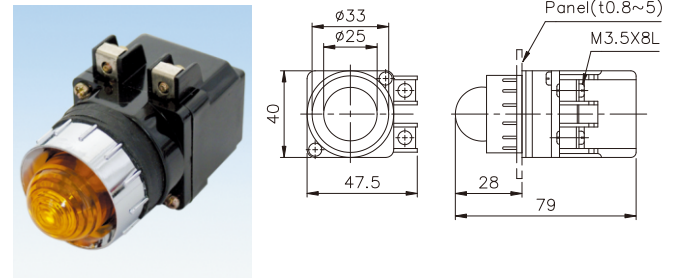


### TPFR-252

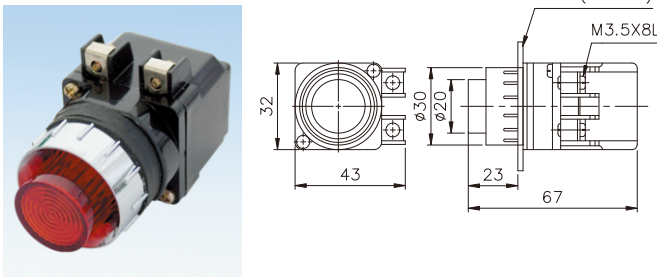

### TPFR-302

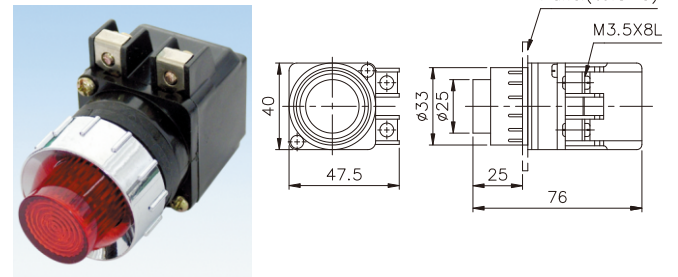


### TPL-302

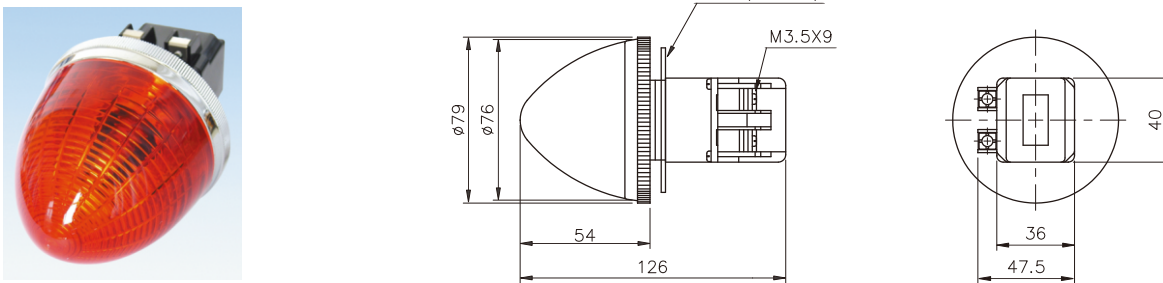


## ■ 閃光指示燈


### TPSF-302

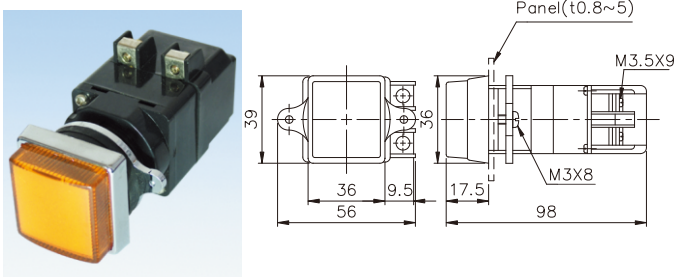


### TPFF-302

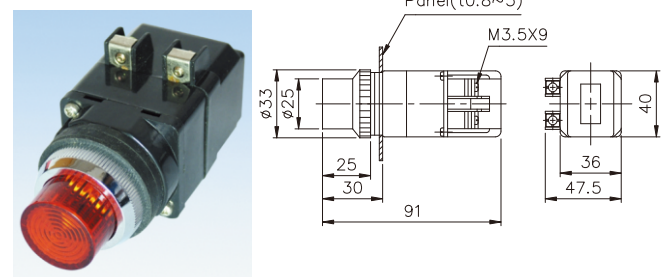


### TPLF-302

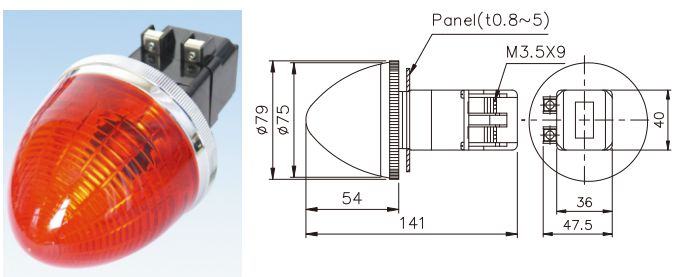

### TPRF-302

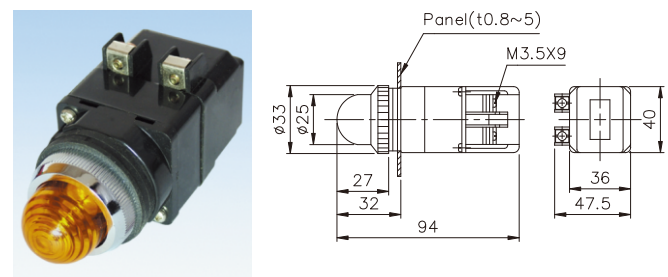

## 型號說明

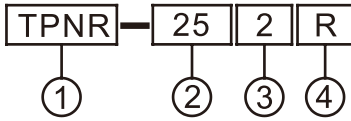

本系列指示燈為直接式不附變壓器, AC110V, AC220V, AC380V, AC440V為霓虹燈泡, 其餘為鎢絲燈泡。


## 燈泡規格

- TPN-12三系列的燈泡, 不可拆換。
- 其餘系列皆為E10燈泡。


項次	代號	說明
1.型式	TPNR TPNF TPNRR TPNFR TPNS TPN TSL	圓型 平頭型 圓型護圈 平頭型護圈 方型 直接式 長方型
2.固定孔徑	25 30 12	Ø25m/m Ø30m/m Ø12m/m
3.額定電壓	1 2 3 4 5 6 7 8 9	110VAC 220VAC 380VAC 440VAC 6.8VAC(DC) 18VAC(DC) 24VAC(DC) 30VAC(DC) 12VAC(DC)
4.燈殼顏色	R G O W BL	紅 綠 橙 白 藍

## 外觀尺寸


### TPNR-252

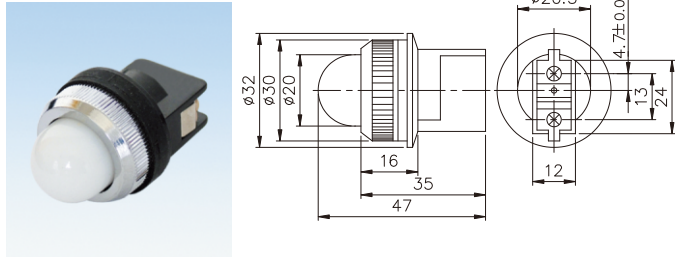


### TPNR-302

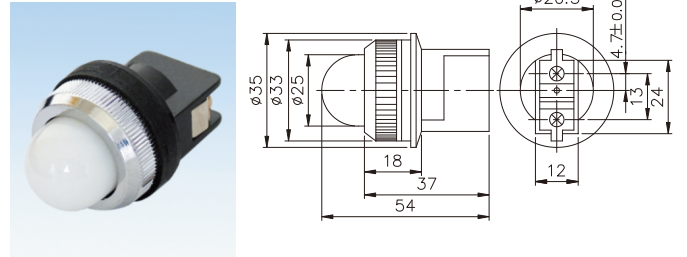


### TPNF-252

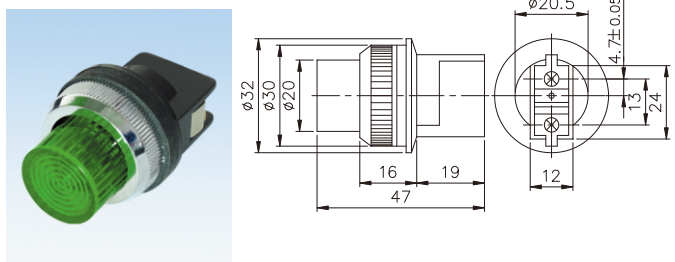


### TPNF-302

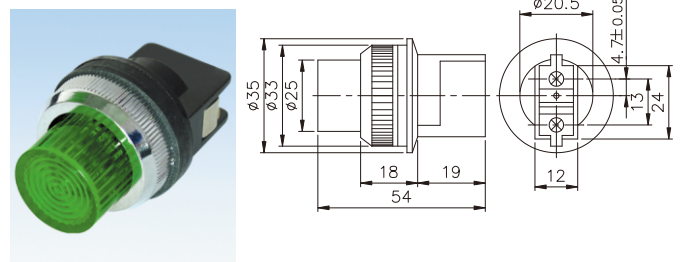

### TPNRR-252

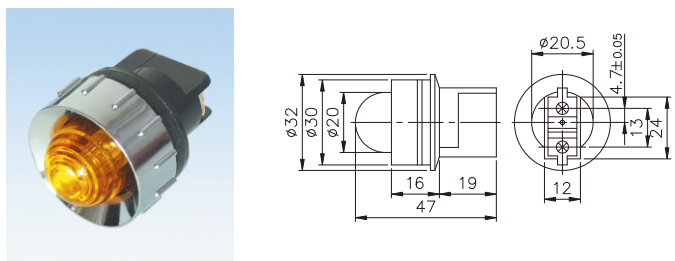

### TPNRR-302

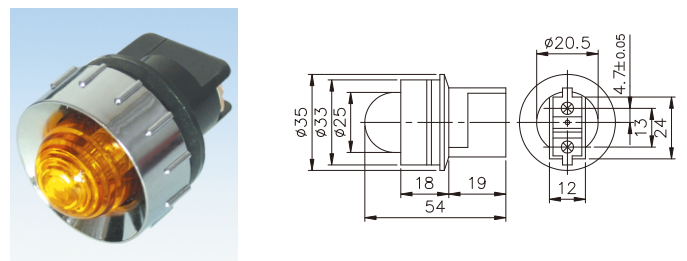


# tend 直接式指示燈


## 外觀尺寸

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>


TPNS-252

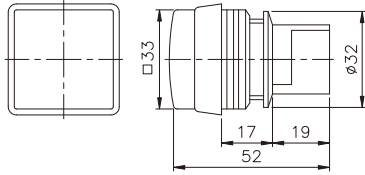


TPNS-302

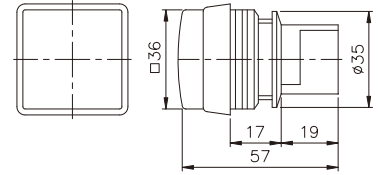

TPNFR-252

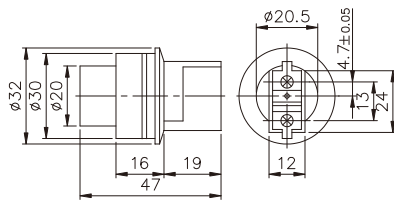

TPNFR-302

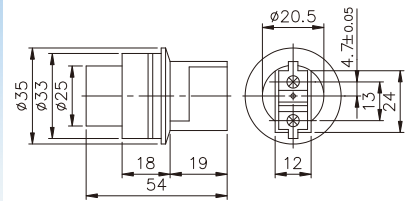

TPN-122

