

## 黑白四分割器

四支Camera輸入可個別作增益修正  
多支CCD鏡頭接錄影機必備。




| 產品編號    | 規 格    |
|---------|--------|
| YK-9003 | 黑白四分割器 |
| TP-400B | 黑白四分割器 |
| KBQ-401 | 黑白四分割器 |
| FUM-106 | 黑白四分割器 |
| KE202   | 黑白四分割器 |

### FEATURES:

- ◆ Full quad display at real time refresh rate.
- ◆ High resolution picture.
- ◆ Supports quad-switch and selection full screen functions.
- ◆ No division border.
- ◆ Video gain adjustable.
- ◆ User-friendly front panel design.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

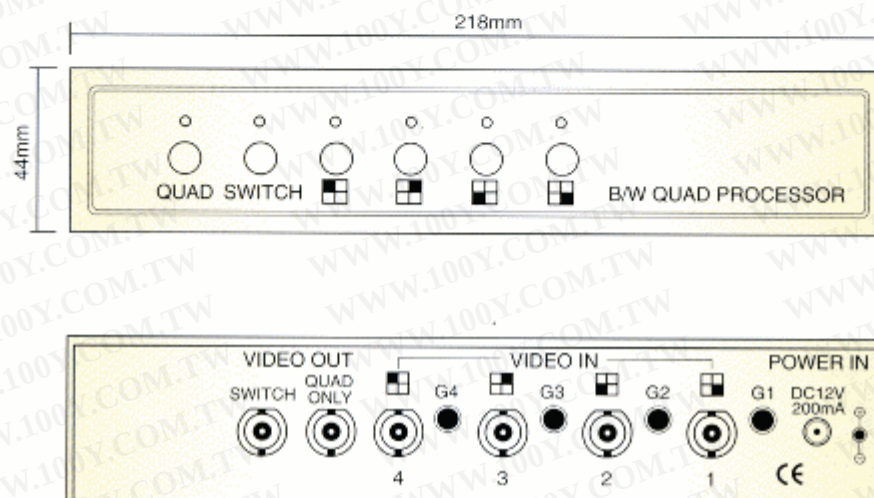

Rear Panel

### SPECIFICATIONS

(Note: Design and specifications are subject to change without prior notice.)

|                      |                                                                                                                                             |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Video Input Port     | 4 Cameras                                                                                                                                   |
| Video Output Port    | 2 Video outputs, Video out signal=1 Vp-p/75 Ohms                                                                                            |
| Picture Refresh Rate | CCIR : 25 Fields/Sec. EIA: 30Fields/Sec.                                                                                                    |
| Digital Memory       | 1024x512 for Full screen                                                                                                                    |
| Video Format         | EIA or CCIR-Monochrome video signal                                                                                                         |
| Video Input          | Quantity: B.N.C.x 4 connector<br>1 Vp-p adjustable par "VR" 75 Ohms                                                                         |
| Video Output         | Quantity: B.N.C.x 2 connector<br>1 Vp-p Full screen or Quad Video Output 75 Ohms (Quad only)<br>1 Vp-p Full screen or Quad 75 Ohms (Switch) |
| Auto Scan Timing     | 3~4sec.                                                                                                                                     |
| Dimension (LxWxH)    | 210 x 220 x 44mm                                                                                                                            |
| Power Supply         | DC 12V                                                                                                                                      |
| Power Consumption    | 250mA                                                                                                                                       |