



LICENCE

No. 14636

Issued to:
Applicant:
**Siemens A.G. A+D ET
Siemensstrasse 10
PO Box 309
93055 REGENSBURG
Germany**

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Licensee:
**Siemens S.A./N.V.
Chee. de Charleroisestwg, 116
1060 BRUXELLES
Belgium**

Product : residual current operated circuit-breakers (rccb)
Trade name(s) : SIEMENS
Type(s)/model(s) : 5SM1...-6 ; 5SM3...-6 ; 5SM3...-6KK12 ; 5SM3.4.-6

The product and any acceptable variation thereto is specified in the annex to this licence and the documents therein referred to.

SGS CEBEC hereby declares that the above-mentioned product has been certified on the basis of:


- a type test according to the standard specified in annex
- an inspection of the production location according to CCA Group Operational Document CIG 021
- a certification agreement with the number 20

SGS CEBEC hereby grants the right to use the CEBEC certification mark



The CEBEC certification mark may be applied to the product as specified in this licence for the duration of the CEBEC certification agreement and under the conditions of the CEBEC certification agreement.

This licence is issued on: 22/02/2006

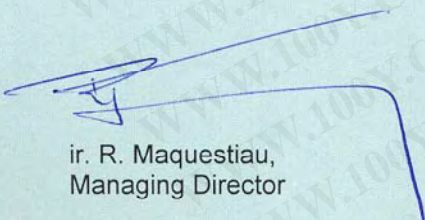
ir. R. Maquestiau,
Managing Director

© Only integral publication of this certificate, including the annex, is allowed

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATION OF THE CERTIFIED PRODUCT

Product data

Product	:	residual current operated circuit-breakers (rccb)
Trade name(s)	:	SIEMENS
Type(s)/Model(s)	:	5SM1...-6 ; 5SM3...-6 ; 5SM3...-6KK12 ; 5SM3.4.-6
rated current (In)	:	25 A, 40 A & 63A
number of poles	:	3P + N
rated voltage (Un)	:	230 V ... 400 V AC
rated frequency	:	50 Hz
rated residual current (I _{dn})	:	30, 100, 300 & 500 mA
residual current type	:	A
rated short-circuit current (I _{cn})	:	10000 A
rated cond. residual short-circuit current (I _{dc})	:	10000 A
backup protection	:	Fuse type gG
rated making and breaking capacity (I _m)	:	800 A
rated residual making and breaking capacity (I _{dm})	:	800 A
rated ambient temperature (t _a)	:	-25°C to 40°C
method of mounting	:	Din rail
terminals	:	Screw type
method of connection	:	Not associated with the mechanical mounting
safety distance 'a'	:	60 mm

Additional information

See Appendix

TESTS**Test requirements**

NBN EN 61008-1:2004
NBN EN 61008-2-1:1994 + A1:1998
Belgian requirement : 22,5 kA²s / 3000 A

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Test results

The test results are laid down in certification file ref.577522/02

Remarks

This certificate is based on certificate ref. CCA/DE1 30085 and test report(s) ref. 40017-1720-0059/41835-(001) up to -(006) & 57377900/01

Conclusion

The examination proved that all test requirements were met.

Checked by, project leader : Didier Leemans - 27/02/2006

Department Manager,
Product Certification :

Silvio PIRAS 2006-02-27

Certification Manager :

2006-02-27

FACTORY LOCATION(S)

Siemens A.G. A+D ET
Siemensstrasse 10
PO Box 309
93055 REGENSBURG
Germany

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




N° of poles	Rated Current	Rated residual operating current	Model/Type ref.:	Model/Type ref.:	Model/Type ref.:
4	25 A	30 mA	5SM1 342-6	5SM3 342-6	5SM3 342-6KK12
4	25 A	100 mA	5SM1 442-6	5SM3 442-6	
4	25 A	300 mA	5SM1 642-6	5SM3 642-6	
4	25 A	500 mA	5SM1 742-6	5SM3 742-6	
4	40 A	30 mA	5SM1 344-6	5SM3 344-6	5SM3 344-6KK12
4	40 A	100 mA	5SM1 444-6	5SM3 444-6	
4	40 A	300 mA	5SM1 644-6	5SM3 644-6	5SM3 644-6KK12
4	40 A	500 mA	5SM1 744-6	5SM3 744-6	
4	63 A	30 mA	5SM1 346-6	5SM3 346-6	5SM3 346-6KK12
4	63 A	100 mA	5SM1 446-6	5SM3 446-6	
4	63 A	300 mA	5SM1 646-6	5SM3 646-6	5SM3 646-6KK12
4	63 A	500 mA	5SM1 746-6	5SM3 746-6	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)





勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

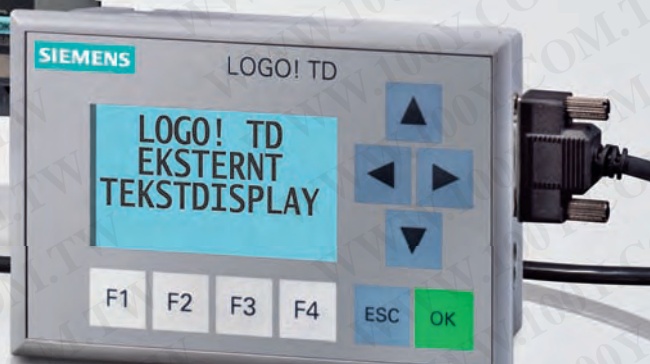

Siguide - montørkatalog

Bestillingsdata, typenr. samt EAN-nr. på de mest gængse tavlekomponenter

Marts 2009

SIEMENS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Siemens
Borupvang 3
2750 Ballerup

www.siemens.dk/ind
www.siemens.dk/ind-kataloger
www.siemens.dk/ind-prislistor
www.siemens.dk/siguide

Kundeservice
Telefon 44 77 55 55
Fax 44 77 40 23

Presales - tast 2
ind-presales.dk@siemens.com

Ekspedition - tast 4
ind-ekspedition.dk@siemens.com

Siemens Mall giver hurtigere adgang
til produktinformationer på
www.siemens.dk/mall

Indholdsfortegnelse

DIN-skinmateriel

BETA



Side 3 Side 5 Side 7 Side 8 Side 11 Side 11 Side 13

Koblingsmateriel

Sirius



Side 18 Side 20 Side 22 Side 25 Side 26 Side 28 Side 29 Side 30 Side 31 Side 32

Kanalskinner

Sivacon



Side 33 Side 34 Side 36

Strømforsyninger og logikmoduler

LOGO! + SITOP



Side 37 Side 38 Side 39 Side 39

Frekvensomformere

SINAMICS + MICROMASTER



Side 42 Side 44 Side 45

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

BETA sikringer og tilbehør

NEOZED GL/GG, STR. D01, 2A

5SE2302

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



NEOZED GL/GG, STR. D01, 4A

5SE2304



NEOZED GL/GG, STR. D01, 6A

5SE2306



NEOZED GL/GG, STR. D01, 10A

5SE2310



NEOZED GL/GG, STR. D01,13A

5SE2013-2A



NEOZED GL/GG, STR. D01, 16A

5SE2316



NEOZED GL/GG, STR. D02, 20A

5SE2320



NEOZED GL/GG, STR. D02, 25A

5SE2325



NEOZED GL/GG, STR. D02, 35A

5SE2335



NEOZED GL/GG, STR. D02,50A

5SE2350



Tekst

Type

EAN-NR

NEOZED GL/GG, STR. D02, 63A

5SE2363



PASRING D01 2A

5SH5002



PASRING D01 4A

5SH5004



PASRING D01 6A

5SH5006



PASRING D01 10A

5SH5010



PASRING D02 25A

5SH5025



PASRING D02 35A

5SH5035



PASRING D02 50A

5SH5050



NEOZED SIKR.H. D02/63A 3P

5SG5655



ISO AFDÆKN. NEOZED D01 3P

5SH5252



ISO AFDÆKN. NEOZED D02 3P

5SH5254



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

BETA automatsikringer 6 kA/10 kA (Bolig/Industri) - C-karakteristik

AUTOMATSIKRING 6KA1P+N C 10A

5SJ6510-7



AUTOMATSIKRING 6KA1P+N C 13A

5SJ6513-7



AUTOMATSIKRING 6KA1L+N C 16A

5SJ6516-7



AUTOMATSIKRING 6KA3L+N C 6A

5SJ6616-7



AUTOMATSIKRING 6KA3P+N C 20A

5SJ6620-7



AUTOMATSIKRING 6KA3P+N C 25A

5SJ6625-7



AUTOMATSIKRING 6KA1P+N C 6A

5SY6506-7



AUTOMATSIKRING 6KA1P+N C 10A

5SY6510-7



AUTOMATSIKRING 6KA1P+N C 13A

5SY6513-7



AUTOMATSIKRING 6KA1P+N C 16A

5SY6516-7



Tekst

Type

EAN-NR

AUTOMATSIKRING 6KA3P+N C 10A

5SY6610-7



AUTOMATSIKRING 6KA3P+N C 13A

5SY6613-7



AUTOMATSIKRING 6KA3P+N C 16A

5SY6616-7



AUTOMATSIKRING 6KA3P+N C 20A

5SY6620-7



AUTOMATSIKRING 6KA3P+N C 25A

5SY6625-7



AUTOMATSIKRING 6KA3P+N C 32A

5SY6632-7



AUTOMATSIKRING 6KA3P+N C 40A

5SY6640-7



AUTOMATSIKRING 6KA3P+N C 50A

5SY6650-7



AUTOMATSIKRING 6KA3P+N C 63A

5SY6663-7



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EAN-NR

Tilbehør

HJÆLPEKONTAKT 1S+1B, 5SY/5SP4

5ST3010



ALARMKONTAKT 1S+1B, 5SY/5SP4

5ST3020



BETA kombineret fejlstrømsafbryder/automatsikring

KOMBIAFB 30MA, 6KA, 1+N-P C 6A

5SU1356-7KK06



KOMBIAFB 30MA, 6KA, 1+N-P C 10A

5SU1356-7KK10



KOMBIAFB 30MA, 6KA, 1+N-P C 13A

5SU1356-7KK13



KOMBIAFB 30MA, 6KA, 1+N-P C 16A

5SU1356-7KK16



KOMBIAFB 300MA, 6KA, 1+N-P C 6A

5SU1656-7KK06



KOMBIAFB 300MA, 6KA, 1+N-P C 10A

5SU1656-7KK10



Tekst

Type

EAN-NR

KOMBIAFB 300MA, 6KA, 1+N-P C 13A

5SU1656-7KK13



KOMBIAFB 300MA, 6KA, 1+N-P C 16A

5SU1656-7KK16



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BETA fejlstrømsafbrydere

HPFI-AFBR, 25A 2P 30MA 230V

5SM3312-6



HPFI-AFBR, 40A 2P 30MA 230V

5SM3314-6



PFI-AFBR, 40A 2P 0,3A 230V

5SM3614-6



HPFI-AFBR, 40A 4P 30MA 400V

5SM3344-6



HPFI-AFBR, 63A 4P 30MA 400V

5SM3346-6



PFI-AFBR, 40A 4P 0,3A 400V

5SM3644-6







PFI-AFBR, 63A 4P 0,3A 400V

5SM3646-6



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	EAN-NR
PFI-AFBR, 63A 4P 0,3A 400V Selektiv	5SM3646-8	 4 001869 180212
Tilbehør til HPFI-afbryder		
HJÆLPEKONTAKT 5SM3 16-80A 1S+1B	5SW3300	 4 001869 186412
BETA HPFI-afbryder til lange kabler, PC'er, belysning m.m.		
HPFI-AFBR, 25A 2P 30MA 230V Superresistent	5SM3312-6KK01	 4 001869 357164
HPFI-AFBR, 40A 2P 30MA 230V Superresistent	5SM3314-6KK01	 4 001869 357171
HPFI-AFBR, 63A 2P 30MA 230V Superresistent	5SM3316-6KK01	 4 001869 357188
HPFI-AFBR, 25A 4P 30MA 230V Superresistent	5SM3342-6KK01	 4 001869 180243
HPFI-AFBR, 40A 4P 30MA 230V Superresistent	5SM3344-6KK01	 4 001869 180250
HPFI-AFBR, 63A 4P 30MA 230V Superresistent	5SM3346-6KK01	 4 001869 271798

Tekst

Type

EAN-NR

BETA AC/DC HPFI-afbryder til bl.a. frekvensomformere

SIQUENCE HPFI. AC/DC 40A 4P 30MA

5SM3344-4



SIQUENCE HPFI. AC/DC 63A 4P 30MA

5SM3346-4



SIQUENCE HPFI. AC/DC 80A 4P 30MA

5SM3347-4



SIQUENCE PFI. AC/DC 40A 4P 0,3A

5SM3644-4



SIQUENCE PFI. AC/DC 63A 4P 0,3A

5SM3646-4



SIQUENCE PFI. AC/DC 80A 4P 0,3A

5SM3647-4



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

BETA HPFI/PFI-afbryder til aggressive omgivelser

SIGRES HPFI-RELÆ, 40A 4P 30MA	5SM3344-6KK12
SIGRES HPFI-RELÆ, 63A 4P 30MA	5SM3346-6KK12
SIGRES PFI-RELÆ, 40A 4P 0.3A	5SM3644-6KK12
SIGRES PFI-RELÆ, 63A 4P 0.3A	5SM3646-6KK12



BETA DIN-skinne kontaktorer og kiprelæer

KONTAKTOR 1S1B 230V/400V 20A	5TT5801-0
KONTAKTOR 2 S 230V/400V 20A	5TT5800-0
KONTAKTOR 1 S 1 B 24V 20A	5TT5801-2
KONTAKTOR 2 S 24V 20A	5TT5800-2



Tekst

Type

EAN-NR

KONTAKTOR 4 S 230V/400V 24A

5TT5730-0



KONTAKTOR 4S UC 24V/400V 24A

5TT5730-2



KONTAKTOR 4S 230V/400V 40A

5TT5740-0



KONTAKTOR 4S 230V/400V 63A

5TT5750-0



KIPRELÆ 230V 16A 1S

5TT4101-0



KIPRELÆ 230V 16A 2S

5TT4102-0



KIPRELÆ 230V 16A 3S

5TT4103-0



KIPRELÆ 24V 16A 1S

5TT4101-2



KIPRELÆ 24V 16A 2S

5TT4102-2



KIPRELÆ 24V 16A 3S

5TT4103-2



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EAN-NR

BETA øvrigt DIN-skinne materiel

LASTAFBRYDER 63A 3P+N 5TE8514

LASTAFBRYDER 690V 100A 3P+N 5TE1610

LASTAFBRYDER 690V 125A 3P+N 5TE1620

LASTAFBRYDER 690V 160A 3P+N 5TE1630

LASTAFBRYDER 690V 200A 3P+N 5TE1640

SKUMRINGSRELÆ UDV. 2-2000 LUX 5TT3303

SKUMRINGSRELÆ 16A 500LUX, 1 KAN 7LQ2100

LASTAFBRYDER 32A 1S 5TE8311

LASTAFBRYDER 20A 1S 5TE8111

TRAPPEAUTOMAT 3 LEDER 230V 7LF6110



勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

DIGITAL KONTAKTUR MINI UGE 230V

7LF4401-1

DIGITAL KONTAKTUR TOP UGE 230V

7LF4411-0

DIGITAL KONTAKTUR TOP UGE 230V

7LF4412-0

DIGITAL KONTAKTUR ASTRO UGE 230V

7LF4431-0

DIGITAL KONTAKTUR EXPERT ÅR 230V

7LF4444-0

USB ENHED, SOFTWARE T DIGITAL KONTAKTUR

7LF4940-0

MEKANISK KONTAKTUR DAG 1S 230V/50HZ

7LF5300-1

MEKANISK QUARTZ UR DAG 1S 230V/50-60HZ

7LF5301-1

MULTIFUNKTIONSTIMER 12-230V

5TT3185

MEKANISK TIDSTÆLLER 230V 50 HZ

7KT5804

TIMETÆLLER 48X48MM AC 230V 60HZ

7KT5504



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	EAN-NR
TRANSFORMER 230V/8V 8VA PTC	4AC3408	4 001869 309125
TRANSFORMER 230V/8V 24VA PTC	4AC3524	4 001869 309156
TRANSFORMER 230V/12+12V 16VA PTC	4AC3616	4 001869 309149
SOFTSTARTER 0 - 5,5KW, 3FASER	5TT3440	4 001869 155944
SOFTSTARTER 0 - 1,5KW, 1FASET	5TT3441	4 001869 183084



BETA øvrigt DIN-skinne materiel - fortsat

TEMPERATURSTYRING -30/+30° C	7LQ2001	4 001869 311166
FASEKONTROL F/DIN-SKINNE	5TT3421	4 001869 155883
GSM ALARMMODUL 1. 10-30 VDC	5TT7110-0	4 001869 355443
GSM ALARMMODUL 2. 10-30 VDC MED BACKUP	5TT7120-0	4 001869 355450



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

MAGNET ANTENNE GSM ALAMMODUL

5TT7908-1



FLAD ANTENNE TIL GSM ALARMMODUL

5TT7908-2



ALPHA 160 installationstavler

INDBYGNING IP31 500/300 MM 36 MODULER

8GK1051-1KK11



INDBYGNING IP31 500/550 MM 72 MODULER

8GK1051-1KK21



INDBYGNING IP31 500/800 MM 108 MODULER

8GK1051-1KK31



INDBYGNING IP31 650/300 MM 48 MODULER

8GK1051-2KK11



INDBYGNING IP31 650/550 MM 96 MODULER

8GK1051-2KK21



INDBYGNING IP31 650/800 MM 144 MODULER

8GK1051-2KK31



VÆGMONTAGE IP43 500/300 MM 36 MODULER

8GK1052-1KK11



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst	Type	EAN-NR
VÆGMONTAGE IP43 500/550 MM 72 MODULER	8GK1052-1KK21	4 001869 256467
VÆGMONTAGE IP43 500/800 MM 108 MODULER	8GK1052-1KK31	4 001869 256474
VÆGMONTAGE IP43 650/300 MM 48 MODULER	8GK1052-2KK11	4 001869 256481
VÆGMONTAGE IP43 650/550 MM 96 MODULER	8GK1052-2KK21	4 001869 256498
VÆGMONTAGE IP43 650/800 MM 144 MODULER	8GK1052-2KK3	4 001869 256504



DELTA røgalarm

RØGMELDER 9V STAND-ALONE	5TC1295	4 001869 330297
RØGMELDER 230V KOMUNIKATION 9V BACKUP	5TC1296	4 001869 330303
TILSLUTNINGSDÅSE TIL 5TC1296	5TC1297	4 001869 334905



Tekst

Type

EAN-NR

Sirius kontaktorer

230 V AC

S00 Kontaktor 3 kW

3RT1015-1AP01



S00 Kontaktor 4 kW

3RT1016-1AP01



S0 Kontaktor 5,5 kW

3RT1024-1AP00



S0 Kontaktor 7,5 kW

3RT1025-1AP00



S2 Kontaktor 11 kW

3RT1026-1AP00



24 V AC

S00 Kontaktor 3 kW

3RT1015-1AB01



S00 Kontaktor 4 kW

3RT1016-1AB01



S0 Kontaktor 5,5 kW

3RT1024-1AB00



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

S0 Kontaktor 7,5 kW

3RT1025-1AB00



S0 Kontaktor 11 kW

3RT1026-1AB00



24 V DC

S00 Kontaktor 3 kW

3RT1015-1BB41



S00 Kontaktor 4 kW

3RT1016-1BB41



S0 Kontaktor 5,5 kW

3RT1024-1BB40



S0 Kontaktor 7,5 kW

3RT1025-1BB40



S0 Kontaktor 11 kW

3RT1026-1BB40



Tilbehør

S00 Hjælpekontakt 2sl./2br.

3RH1911-1HA22



S0 Hjælpekontakt 2sl./2br.

3RH1921-1HA22



Tekst

Type

EAN-NR

Sirius håndbetjente motorværn

TYPE S00

0,35 – 0,50 A / 0,12 kW

3RV1011-0FA10

0,45 – 0,63 A / 0,18 kW

3RV1011-0GA10

0,70 – 1,00 A / 0,25 kW

3RV1011-0JA10

0,90 – 1,25 A / 0,37 kW

3RV1011-0KA10

1,10 – 1,60 A / 0,55 kW

3RV1011-1AA10

1,40 – 2,00 A / 0,75 kW

3RV1011-1BA10

2,20 – 3,20 A / 1,1 kW

3RV1011-1DA10

2,80 – 4,00 A / 1,5 kW

3RV1011-1EA10

4,50 – 6,30 A / 2,2 kW

3RV1011-1GA10



勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

5,50 – 8,00 A / 3,0 kW

3RV1011-1HA10



4 011209 263680

7,00 – 10,0 A / 4,0 kW

3RV1011-1JA10



4 011209 263697

TYPE S0

9,00 – 12,5 A / 5,5 kW

3RV1021-1KA10



4 011209 281196

14,0 – 20,0 A / 7,5 kW

3RV1021-4BA10



4 011209 281219

20,0 – 25,0 A / 11,0 kW

3RV1021-4DA10



4 011209 281233



Tilbehør

Hjælpekontakt sidemonteret

3RV1901-1A



4 011209 280205

Hjælpekontakt topmonteret

3RV1901-1E



4 011209 305977

Linkmodul S00 AC/DC

3RA1911-1AA00



4 011209 516472

Linkmodul S0 AC

3RA1921-1AA00



4 011209 516489

Tekst

Type

EAN-NR

Linkmodul S0 DC

3RA1921-1BA00



Sirius Softstartere

3,0 A/1,1 kW 200-400 V AC
24-230 VUC 22,5mm

3RW3003-2CB54



200-480 V AC / med 24 V AC/DC styrespænding incl. Bypass-kontaktor

TYPE S00

3,6 A / 1,5 kW

3RW3013-1BB04



6,5 A / 3 kW

3RW3014-1BB04



9 A / 4 kW

3RW3016-1BB04



12,5 A / 5,5 kW

3RW3017-1BB04



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

17,6 A / 7,5 kW

3RW3018-1BB04



TYPE S0



25 A / 11 kW

3RW3026-1BB04



32 A / 15 kW

3RW3027-1BB04



38 A / 18,5 kW

3RW3028-1BB04



200-480V AC -110...230V AC/DC styrespænding incl. Bypass-kontaktor

TYPE S00

3,6 A / 1,5 kW

3RW3013-1BB14



6,5 A / 3 kW

3RW3014-1BB14



9 A / 4 kW

3RW3016-1BB14



12,5 A / 5,5 kW

3RW3017-1BB14



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

Sirius Softstartere - fortsat

17,6 A / 7,5 kW

3RW3018-1BB14



TYPE S0

25 A / 11 kW

3RW3026-1BB14



32 A / 15 kW

3RW3027-1BB14



38 A / 18,5 kW

3RW3028-1BB14



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

Sirius Termorelæer

TYPE S00

0,35 – 0,50 A / 0,12 kW

0,45 – 0,63 A / 0,18 kW

0,70 – 1,00 A / 0,25 kW

0,90 – 1,25 A / 0,37 kW

1,10 – 1,60 A / 0,55 kW

1,40 – 2,00 A / 0,75 kW

2,20 – 3,20 A / 1,1 kW

2,80 – 4,00 A / 1,5 kW

4,50 – 6,30 A / 2,2 kW



3RU1116-0FB0

3RU1116-0GB0

3RU1116-0JB0

3RU1116-0KB0

3RU1116-1AB0

3RU1116-1BB0

3RU1116-1DB0

3RU1116-1EB0

3RU1116-1GB0

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Tekst

Type

EAN-NR

5,50 – 8,00 A / 3,0 kW

3RU1116-1HB0



7,00 – 10,0 A / 4,0 kW

3RU1116-1JB0



TYPE S0



9,00 – 12,5 A / 5,5 kW

3RU1126-1KB0



14,0 – 20,0 A / 7,5 kW

3RU1126-4BB0



18,0 – 25,0 A / 11,0 kW

3RU1126-4DB0



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SIRIUS overlastrelæer

S00 0,3-1,2A Klasse 10

3RB2016-1NB0



S00 1-4A Klasse 10

3RB2016-1PB0



S00 0,1-0,4A Klasse 10

3RB2016-1RB0



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

S00 3-12A Klasse 10

3RB2016-1SB0



S00 0,3-1,2A Klasse 20

3RB2016-2NB0



S00 1-4A Klasse 20

3RB2016-2PB0



S00 0,1-0,4A Klasse 20

3RB2016-2RB0



S00 3-12A Klasse 20

3RB2016-2SB0



S0 6-25A Klasse 10

3RB2026-1QB0



S0 3-12A Klasse 10

3RB2026-1SB0



S0 6-25A Klasse 20

3RB2026-2QB0



S0 3-12A Klasse 20

3RB2026-2SB0



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EAN-NR

Sirius kapslede motorstartere IP65

230 V AC styrespænding * Der skal bestilles separat termorelæ iht. given motorstørrelse

S00 12 A max 5,5 kW direkte start

3RE1010-8XC17-0APO

S0 17 A max 7,5 kW direkte start

3RE1020-8XC25-0APO

S0 25 A max 11 kW direkte start

3RE1020-8XC26-0APO

S00 12 A max 5,5 kW revers. start

3RE1310-8XC17-0APO



400 V AC styrespænding * Der skal bestilles separat termorelæ iht. given motorstørrelse

S00 12 A max 5,5 kW direkte start

3RE1010-8XC17-0AV0

S0 17 A max 7,5 kW direkte start

3RE1020-8XC25-0AV0

S0 25 A max 11 kW direkte start

3RE1020-8XC26-0AV0

S00 12 A max 5,5 kW revers. start

3RE1310-8XC17-0AV0



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	EAN-NR
-------	------	--------

SIRIUS Compact startere

Motorstartere med integreret overlastrelæ, Valgfri resetopførsel (manuel eller automatisk).
 Differentierede meldinger på kortslutning og overbelastning med skruetilslutning og til DIN-skinne蒙tering.

Direkte start 0,32...1,25 A, 24 V AC/DC	3RA6120-1BB32	 4 011209 713673
Direkte start 1...4 A, 24 V AC/DC	3RA6120-1CB32	 4 011209 713949
Direkte start 3...12 A, 24 V AC/DC	3RA6120-1DB32	 4 011209 714243
Reversibel start 0,32...1,25 A, 24 V AC/DC	3RA6250-1BB32	 4 011209 715165
Reversibel start 1...4 A, 24 V AC/DC	3RA6250-1CB32	 4 011209 715370
Reversibel start 3...12 A, 24 V AC/DC	3RA6250-1DB32	 4 011209 715585
Direkte start 0,32...1,25 A, 110 ... 240 V AC/DC	3RA6120-1BP32	 4 011209 713871



Tekst

Type

EAN-NR

Direkte start 1...4 A, 110 ... 240 V AC/DC

3RA6120-1CP32



Direkte start 3...12 A, 110 ... 240 V AC/DC

3RA6120-1DP32



Reversibel start 0,32...1,25 A, 110 ... 240 V AC/DC

3RA6250-1BP32



Reversibel start 1...4 A, 110 ... 240 V AC/DC

3RA6250-1CP32



Reversibel start 3...12 A, 110 ... 240 V AC/DC

3RA6250-1DP32



Serviceafbrydere i plast kapsling

Rød / gul håndtag * Kan aflåses med tre låse

25 A/3P+N service afbr. IP65*

32 A/3P+N service afbr. IP65*

63 A/3P+N service afbr. IP65*



3LD2164-1TC53



3LD2264-1TC53



3LD2565-1TC53



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

100 A/ 3P service afbr. IP65*

3LD2766-0TB53



125 A/ 3P service afbr. IP65*

3LD2866-0TB53



Nulelement for 100 A afbr.

3LD9280-0C



Nulelement for 125 A afbr.

3LD9280-0C



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SIRIUS overvågningsrelæer

Fasefejl 3X160-690V AC SK

3UG4615-1CR20



Spænding 22,5,1-600V 24VUC SK

3UG4632-1AA30



Strøm 22,5,0.1-10 A 24VUC SK

3UG4622-1AA30



HFI 10-100% 90-690V AC

3UG4624-1CS20



Omdrejninger 24VUC SK

3UG4651-1AA30



Tekst

Type

EAN-NR

SIRIUS endestop

Metal, 40mm, M20, arm m/rulle, metalarm, plastikrulle, 1NO/1NC

3SE5112-OCE01



Metal, 40mm, M20, svingarm m/rulle, metalarm, kunststofrulle, 1NO/1NC

3SE5112-0CH01



Kunststof, 31mm, M20, arm m/rulle, metalarm, plastikrulle, 1NO/1NC

3SE5232-0HE10



Kunststof, 31mm, M20, svingarm m/rulle, metalarm, plastikrulle, 1NO/1NC

3SE5232-0HK21



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	Kort tekst	EAN-NR
Sivacon kanalskinner CD-L			
Universalt ophængsbøjle til skinne	8PS0070-0AA00	CD-L-B1-G-12	4 019169 827904
3m Skinneelement, 25 A, 5-leder, afg. 1m	8PS0301-3CF25	CD-L-1254-3-1	4 019169 825061
2m Skinneelement, 25 A, 5-leder afg. 1m	8PS0300-2CF25	CD-L-1254-2-1	4 019169 825085
Afgangsstik 3P 16A, frit fasevalg, uden ledning	8PS0040-0AF16	CD-L-A3O16-N/L-0	4 019169 827553
Afgangsstik 3P 10A, fase L1+N, 1 m ledn.	8PS0044-1KF10	CD-L-A3O10-N/L1-1	4 019169 827652
Afgangsstik 3P 10A, fase L2+N, 1 m ledn.	8PS0044-1LF10	CD-L-A3O10-N/L2-1	4 019169 827669
Afgangsstik 3P 10A, fase L3+N, 1 m ledn.	8PS0044-1MF10	CD-L-A3O10-N/L3-1	4 019169 827676
Afgangsstik 5P 10A, 2 m ledn.	8PS0044-2QF10	CD-L-A5O10-N/L1/L2/L3-2	4 019169 827690
Endetilgangsboks, 25A, 5-leder	8PS0330-0CF25	CD-L-1254-EA	4 019169 827171
Endeflange, 25A, 5-leder	8PS1337-0DF40	CD-L-1406-EA-EF	4 019169 827539

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

Kort tekst

EAN-NR

Sivacon kanalskinner BD01

2m 125A Skinneelement afg. 0,5m

BVP:090161

BD01-125-2-0,5



3m 125A Skinneelement afg. 0,5m

BVP:090163

BD01-125-3-0,5



Tilgangsboks 160A

BVP:090165

BD01-160-E



2m 63A Skinneelement afg. 0,5m

BVP:034256

BD01-63-2-0,5



3m 63A Skinneelement afg. 0,5m

BVP:034255

BD01-63-3-0,5



Tilgangsboks med to flanger 40-100A

BVP:034259

BD01-E



Afgangsboks 16A / 1 stk. 3P 16A MCB B

BVP:085089

BD01-AK02M0/ A163



Afgangsboks 16A / 1stk. 3P 16A MCB B
og 5P CEE16A stik

BVP:085092

BD01-AK02M0/
CEE165A163






Afgangsboks 32A / valgfri bestykning

BVP:085093

BD01-AK02M0/F



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	kort tekst	EAN-NR
Afgangsboks str. 116 A 3xsikr. D01 3p	BVP:034264	BD01-AK1X/S14	 4 019169 701242
Afgangsboks str. 132 A 3xsikr. D02 3p	BVP:034265	BD01-AK1X/S18	 4 019169 701259
Afgangsboks med 3P MCB C 16A og 1stk. 5P CEE16A	BVP:034280	BD01-AK2M1/ CEE165A163	 4 019169 701402
Afgangsboks 16A / valgfri bestykning	BVP:203592	BD01-AK2M1/F	 4 019169 743464
Afgangsboks str.2 35A valgfri bestykning - klart låg	BVP:034284	BD01-AK2M2/F	 4 019169 701440
Befæstigelsesbøjle	BVP:081945	BD01-BA	 4 019169 735469

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

kort tekst

EAN-NR

Sivacon kanalskinner BD2

Universalophæng	BVP:045154	BD2-400-BB	 4 019169 701822
Endeflange	BVP:043977	BD2-400-FE	 4 019169 701730
Tilgangsboks 160-250A ved BD2A	BVP:261993	BD2A-250-EE	 4 019169 787659
Standard længde 2,25m 250A, N + PE, 8 Udtag	BVP:261482	BD2A-3-250-SB-2	 4 019169 785808
Standard længde 3,25m 250A, N + PE, 12 Udtag	BVP:261483	BD2A-3-250-SB-3	 4 019169 785815
Afgangsboks 16A / 2stk. 1P D01 og 2 stk 3P CEE16A stik	BVP:047167	BD2-AK1/2CEE16S14	 4 019169 702287
Afgangsboks 16A / 3x D01	BVP:047113	BD2-AK1/S14	 4 019169 702263
Afgangsboks 25A / 3x D02	BVP:047112	BD2-AK1/S18	 4 019169 702256
Afgangsboks 63A / 3P D02 sikr holder	BVP:203135	BD2-AK2X/S18	 4 019169 742801
Afgangsboks 125A / 3P DIN00 sikr holder	BVP:203162	BD2-AK3X/GS00	 4 019169 743044

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

LOGO! Power + SITOP Strømforsyninger

1-Faset

LOGO! Power 24 VDC 1,3 A

6EP1331-1SH02

LOGO! Power 24 VDC 2,5 A

6EP1332-1SH42

LOGO! Power 24 VDC 4,0 A

6EP1332-1SH51

LOGO! Power 12 VDC 1,9 A

6EP1321-1SH02

LOGO! Power 12 VDC 4,5 A

6EP1322-1SH02

SITOP 1-Faset

PSA 100E 24 V DC 2,5 A

6EP1232-1AA00

PSA 100E 24 V DC 4 A

6EP1232-1AA10

PSA 100E 24 V DC 6 A

6EP1233-1AA00



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



4 025515 150916



4 025515 150923



4 025515 151081



4 025515 150879



4 025515 150886



4 025515 151906



4 025515 151913



4 025515 151920

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

PSA 100E 24 V DC 12 A



6EP1234-1AA00



Smart modul 24 V DC 2,5A

6EP1332-2BA10



Smart modul 24 V DC 5A

6EP1333-2AA01



Smart modul 24 V DC 10A

6EP1334-2AA01



SITOP 1-Faset / 2-Faset

Power modular 24 V DC 5A

6EP1333-3BA00



Power modular 24 V DC 10A

6EP1334-3BA00



Power modular 24 V DC 20A

6EP1336-3BA00



Power modular 24 V DC 40A

6EP1337-3BA00



SITOP 3-Faset

Power modular 24V DC 20A

6EP1436-3BA00



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

Power modular 24V DC 40A

6EP1437-3BA00



Tilbehør

Buffermodul, kondensatorbatteri

6EP1961-3BA00



Signalmodul til Power modular

6EP1961-3BA10



Overstrømsbeskyttelse 2-10A, 4 kanaler

6EP1961-2BA00



LOGO! Logikmodul



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

230RC Basis. 8DI/4DO, 10A relæ.

6ED1052-1FB00-0BA6



24RC Basis. 8DI/4DO, 10 A relæ. AC fors.

6ED1052-1HB00-0BA6



12/24RC Basis. 8DI/4DO, 10 A relæ DC fors.

6ED1052-1MD00-0BA6



230RCo Pure. 8DI/4DO, 10A relæ. Uden display

6ED1052-2FB00-0BA6



勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

24RCo Pure. 8DI/4DO, 10 A relæ. AC fors. Uden display 6ED1052-2HB00-0BA6



12/24RCo Pure. 8DI/4DO, 10 A relæ DC fors. Uden display 6ED1052-2MD00-0BA6



Kombimodul. 4DI/4DO, trans., udv. 24V DC 6ED1055-1CB00-0BA0



Kombimodul 4DI/4DO, relæ., udv. 230V AC 6ED1055-1FB00-0BA1



Kombimodul. 4DI/4DO, relæ., udv 24V DC/AC 6ED1055-1HB00-0BA0



Kombimodul. 4DI/4DO, relæ., udv. 12V/24V DC 6ED1055-1MB00-0BA1



Kombimodul. 8DI/8DO, trans., udv. 24V DC 6ED1055-1CB10-0BA0



Kombimodul. 8DI/8DO, relæ., udv. 24V DC 6ED1055-1NB10-0BA0



Kombimodul 8DI/8DO, relæ., udv. 230V AC 6ED1055-1FB10-0BA0



AM2. 2AI indgange 0 - 10 V / 0 - 20 mA. 6ED1055-1MA00-0BA0



AM2 PT 100. 2 indgange PT 100 -50 til 200 gr. 6ED1055-1MD00-0BA0



Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst	Type	EAN-NR
AM2 2AO. 2 udgange 0-10V DC	6ED1055-1MM00-0BA0	4 025515 071747
LOGO! TD tekstdisplay	6ED1055-4MH00-0BA0	6 940408 100084
Programmodul	6ED1056-1DA00-0BA0	6 940408 100213
Batterimodul	6ED1056-6XA00-0BA0	6 940408 100237
Program og batterimodul	6ED1056-7DA00-0BA0	6 940408 100220
Online kabel PC/LOGO! USB	6ED1057-1AA01-0BA0	6 940408 100176
Contact. kontaktor 20 A/4 kW. 24 V DC spole	6ED1057-4CA00-0AA0	4 025515 050742
Contact. kontaktor 20 A/4 kW. 230 V AC spole	6ED1057-4EA00-0AA0	4 025515 050759
Soft Comfort V 6.0 programmeringssoftware	6ED1058-0BA02-0YA0	4 025515 076674
Soft Comfort opdat. fra V 1.0 og op til V 6.0	6ED1058-0CA02-0YE0	4 025515 076667
Manual på tysk / engelsk	6ED1050-1AA00-0AE7 / 6ED1050-1AA00-0BE7	4 019169 186100

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

SINAMICS G110 frekvensomformere

1x200V-240V $\pm 10\%$, 47-63 Hz, med integreret EMC-filter i h.t. EN55011 kl. A, IP20, analog indgang

0,12kW

6SL3211-0AB11-2BA1



0,25kW

6SL3211-0AB12-5BA1



0,37kW

6SL3211-0AB13-7BA1



0,55kW

6SL3211-0AB15-5BA1



0,75kW

6SL3211-0AB17-5BA1



1,1kW

6SL3211-0AB21-1AA1



1,5kW

6SL3211-0AB21-5AA1



2,2kW

6SL3211-0AB22-2AA1



3,0kW

6SL3211-0AB23-0AA1



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

Tilbehør

Betjeningspanel

6SL3255-0AA00-4BA1



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

MicroMaster 420 frekvensomformere

1x200V-240V $\pm 10\%$, 50-60Hz, med integreret radiostøjfilter i h.t. EN55011 kl. A1, IP20

0,12kW

6SE6420-2AB11-2AA1



0,25kW

6SE6420-2AB12-5AA1



0,37kW

6SE6420-2AB13-7AA1



0,55kW

6SE6420-2AB15-5AA1



0,75kW

6SE6420-2AB17-5AA1



1,1kW

6SE6420-2AB21-1BA1



1,5kW

6SE6420-2AB21-5BA1



2,2kW

6SE6420-2AB22-2BA1



3,0kW

6SE6420-2AB23-0CA1



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

MicroMaster 420 frekvensomformere

3x400V op til 3x480V $\pm 10\%$, 50-60Hz, med integreret radiostøjfilter i h.t. EN55011 kl. A1, IP20

2,2kW

6SE6420-2AD22-2BA1



3kW

6SE6420-2AD23-0BA1



4kW

6SE6420-2AD24-0BA1



5,5kW

6SE6420-2AD25-5CA1



7,5kW

6SE6420-2AD27-5CA1



11kW

6SE6420-2AD31-1CA1



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tekst

Type

EAN-NR

MicroMaster 440 frekvensomformere

3x400V op til 3x480V $\pm 10\%$, 50-60Hz, med integreret radiostøjfilter i h.t. EN55011 kl. A1, IP20

2,2kW

6SE6440-2AD22-2BA1



3kW

6SE6440-2AD23-0BA1



4kW

6SE6440-2AD24-0BA1



5,5kW

6SE6440-2AD25-5CA1



7,5kW

6SE6440-2AD27-5CA1



11kW

6SE6440-2AD31-1CA1



MM440 kan fås op til 250kW



勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Søg efter flere produkter på Siemens Mall - www.siemens.dk/mall

Tekst

Type

EAN-NR

Tilbehør

Basis operatør panel (BOP)

6SE6400-0BP00-0AA0



Avanceret operatør panel (AOP)

6SE6400-0AP00-0AA1



PROFIBUS modul

6SE6400-1PB00-0AA0



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Siemens Mall Internetbutikken der gør din hverdag nemmere

Fremtiden ligger i kortere og mere effektive processer. I Siemens Industry Technologies har vi et internetværktøj, der giver hurtigere adgang til vores produktinformation og gør din samhandel med os lettere - uanset hvor i verden du befinder dig.

I Siemens Mall finder du:

- Produktkatalog med mere end 100.000 produkter
- Produktbeskrivelser og måleskitser
- Billeder af produkterne
- Konfigurationsværktøjer
- Informationer om netto- og listepreiser
- Ordrestatus på dine bestillinger
- Track and Trace
- og meget mere

Den direkte vej til Siemens Mall er:
www.siemens.dk/mall

Siemens
Borupvang 3
2750 Ballerup
Telefon 44 77 55 55
Fax 44 77 40 23
e-mail: ind-ekspektion.dk@siemens.com

www.siemens.dk/ind

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)