

CP1275 12V 7.5Ah(20hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and Weight

Length(mm / inch)	151 / 5.94
Width(mm / inch)	65 / 2.56
Height(mm / inch)	94 / 3.70
Total Height(mm / inch)	100 / 3.94
Approx. Weight(Kg / lbs)	2.3 / 5.07

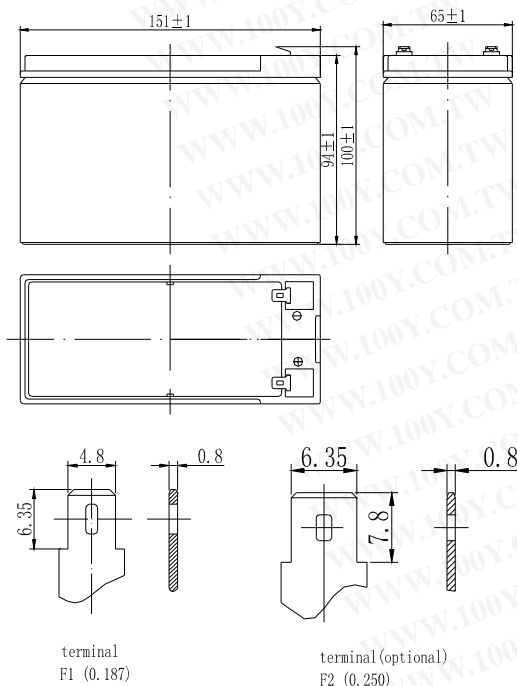

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	5 years
Nominal Capacity 77°F(25°C)	
20 hour rate (0.375A, 10.5V)	7.5Ah
10 hour rate (0.73A, 10.5V)	7.3Ah
5 hour rate (1.32A, 10.5V)	6.6Ah
1 hour rate (5.47A, 9.6V)	5.47Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	25mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	115A(5s)
Short Circuit Current	390A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.30-2.35VPC
Maximum charging current	3.0A
Temperature compensation	-30mV/°C
Standby use	2.23-2.27VPC
Temperature compensation	-20mV/°C









Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	34.2	21.4	14.9	9.05	5.47	2.14	1.47	0.76	0.390
1.65V	32.4	20.4	14.5	8.93	5.28	2.07	1.43	0.75	0.385
1.70V	30.6	19.4	14.1	8.78	5.06	2.01	1.37	0.74	0.380
1.75V	28.7	18.2	13.7	8.58	4.85	1.93	1.32	0.73	0.375
1.80V	26.8	17.2	13.1	8.35	4.61	1.87	1.28	0.72	0.365

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	60.8	40.8	28.3	16.3	12.4	9.70	5.85	4.20	2.71
1.65V	57.8	38.8	27.7	16.1	12.3	9.58	5.72	4.09	2.67
1.70V	54.8	36.7	27.0	15.9	12.1	9.42	5.57	3.98	2.62
1.75V	52.0	34.7	26.3	15.6	11.9	9.24	5.39	3.85	2.57
1.80V	49.1	32.6	25.5	15.2	11.6	9.01	5.22	3.73	2.50

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

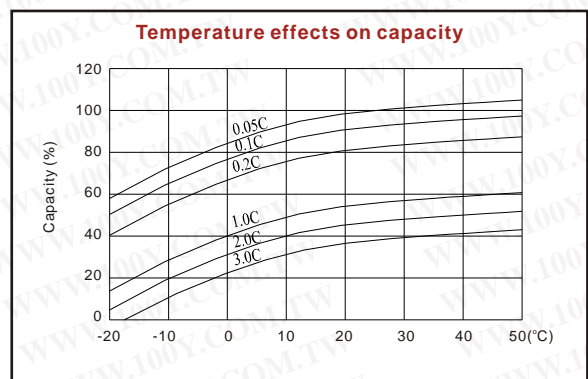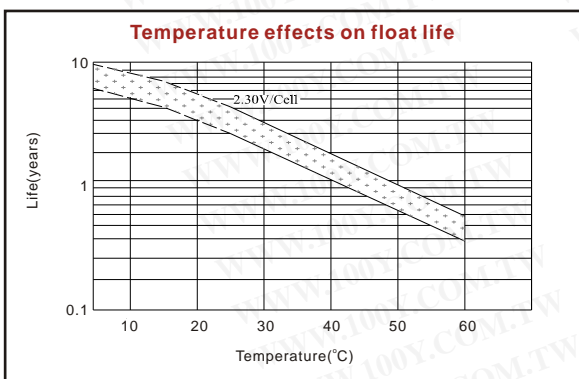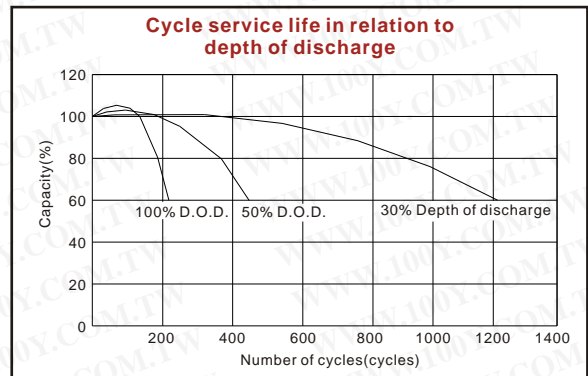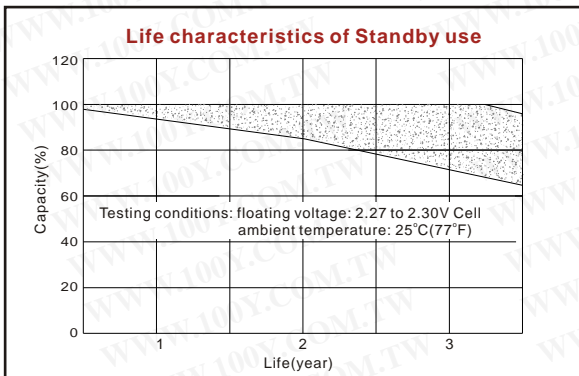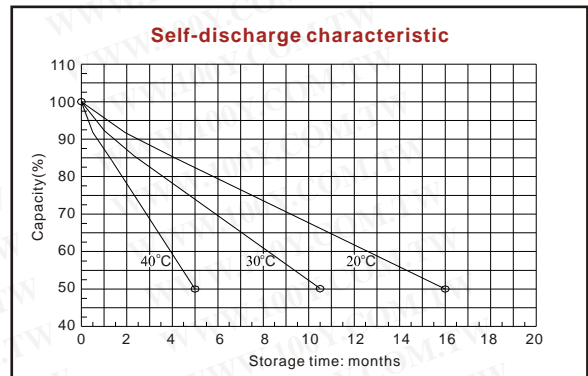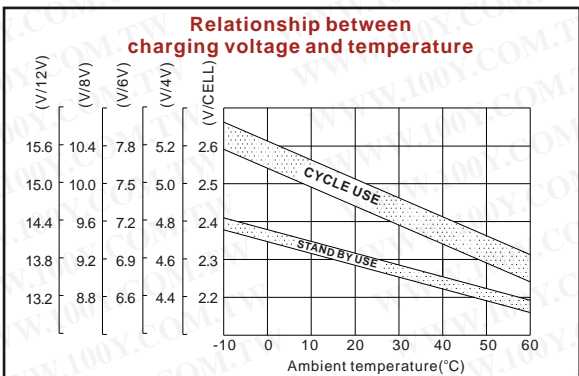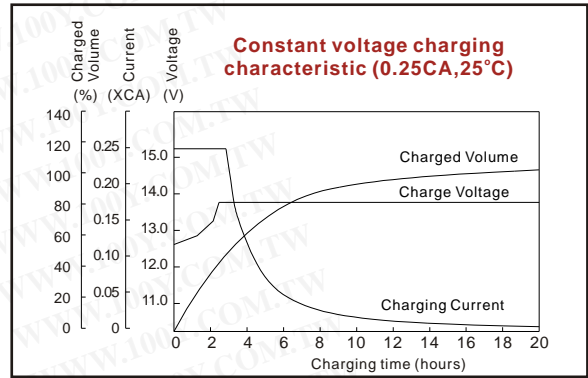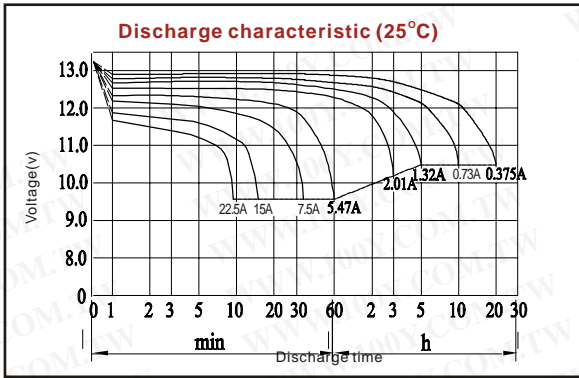

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

www.vision-batt.com

Shenzhen, China
www.vision-batt.com