

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
BDDIST
39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	0G3B-0317-03	24APR03	TK	GS

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

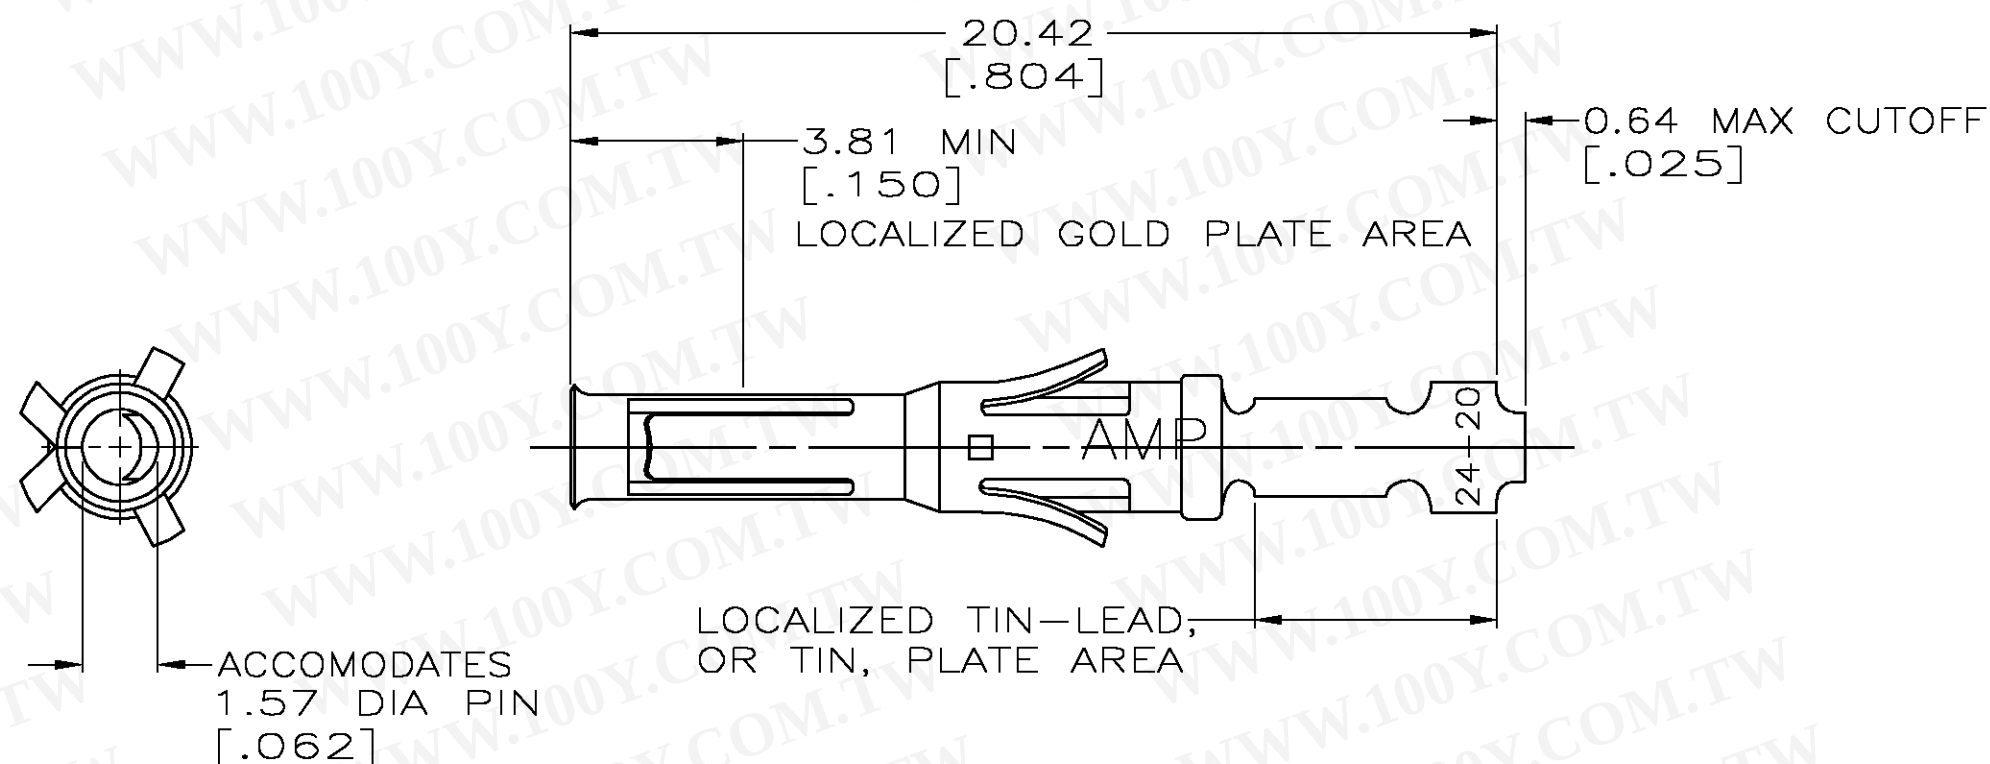

1. WIRE RANGE 24-20 AWG.
2. INSULATION RANGE 1.02-2.03[.040-.080] DIA.
3. 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27 μm [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
6. 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm [.000050] MIN NICKEL.

1-66584-0	6	66594-4
66584-4	3	66594-2
66584-2	4	66594-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa		
DIMENSIONS: INCHES		CHK R.STONE 06/22/94			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.STEINHAEUER 06/27/94	NAME CONTACT, SOCKET, LOOSE PIECE, TYPE VI, MULTIMATE		
MATERIAL BRS PER MIL-C-50		PRODUCT SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C-66594
FINISH 5 SEE TABLE		APPLICATION SPEC —	RESTRICTED TO	SCALE 6:1	SHEET 1 OF 1
CUSTOMER DRAWING		WEIGHT —	REV G		