


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

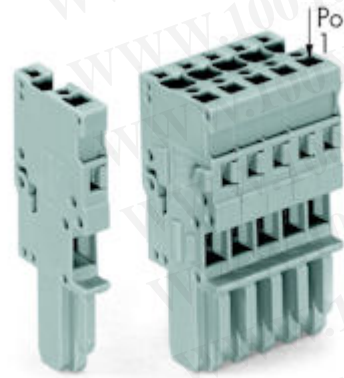

## 769-102

1-Conductor female plug straight to be fixed on receptacle terminal blocks or male connectors with codig fingers commoning possibility with miniature adjacent jumpers 2 pole

Packing unit 100 pieces

RoHS compliant

Product group	18 (X-COM-SYSTEM)
pole count	2
Cross section [mm <sup>2</sup> ]	0.08 - 4 mm <sup>2</sup>
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	7.077 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	45.2 mm
Height	1.78 in
Width	10 mm
Width	0.394 in

Depth	18.3 mm
Depth	0.72 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)