


NON-INSULATED RING TERMINALS

select * from Item1_Valid where ItemNo='1001' **MAXIMUM ELECTRIC CURRENT:**

A.W.G.	22	20	18	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600
AMP.	9	12	17	18	30	35	50	70	95	125	170	230	265	310	360	405	445	505	545	620	690

TERMINAL MATERIAL: COPPER

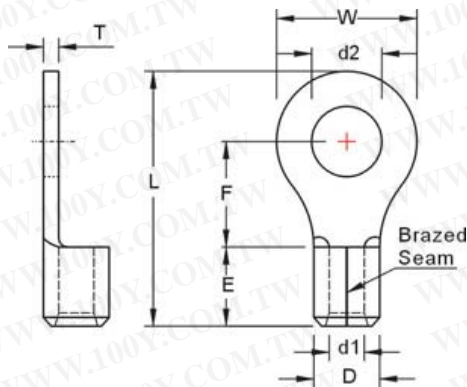

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch(mm)		Q'TY BOX
	BRAZED SEAM	BUTTED SEAM		d2		W	
16-14 A.W.G.	RNBS2-4	RNS2-4	#8	0.169 4.3	0.260 6.60		1000
		RNL2-4	#8	0.169 4.3	0.335 8.50		
1.5-2.5 mm ²	RNBS2-5	RNS2-5	#10	0.209 5.3	0.335 8.50		1000
		RNL2-5	#10	0.209 5.3	0.374 9.50		
	RNB2-6	RN2-6	1/4	0.252 6.4	0.472 12.00		1000
		RN2-8	5/16	0.331 8.4	0.472 12.00		
	RNB2-9	RN2-9	5/16	0.386 9.8	0.535 13.60		1000
		RN2-10	3/8	0.413 10.5	0.535 13.60		

	RNBL2-10 NEW	RNL2-10	3/8	0.413 10.5	0.756 19.20	1000
	RNB2-12	RN2-12	1/2	0.512 13	0.756 19.20	1000
	RNB2-14	RN2-14	9/16	0.591 15	1.063 27.00	1000
	RNB2-16	RN2-16	5/8	0.669 17	1.063 27.00	1000
	RNB2-20	RN2-20	3/4	0.827 21	1.063 27.00	1000
14-12 A.W.G. 2.5-4 mm ²	RNBS3-3.2 NEW	RNS3-3.2	#4	0.126 3.2	0.217 5.50	1000
	RNB3-3.2 NEW	RN3-3.2	#4	0.126 3.2	0.315 8.00	1000
	RNBS3-4 NEW	RNS3-4	#8	0.169 4.3	0.283 7.20	1000
	RNB3-4	RN3-4	#8	0.169 4.3	0.315 8.00	1000
	RNBS3-5	RNS3-5	#10	0.209 5.3	0.315 8.00	1000
	RNBM3-5	RNM3-5	#10	0.209 5.3	0.374 9.50	1000
	RNBL3-5	RNL3-5	#10	0.209 5.3	0.472 12.00	1000
	RNB3-6	RN3-6	1/4	0.252 6.4	0.472 12.00	1000
	RNB3-8	RN3-8	5/16	0.331 8.4	0.591 15.00	1000
	RNB3-10	RN3-10	3/8	0.413 10.5	0.591 15.00	1000
	RNB3-12	RN3-12	1/2	0.512 13	0.756 19.20	1000

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)