


# International IOR Rectifier


## MT..KB SERIES

### THREE PHASE BRIDGE

### Power Modules

#### Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V<sub>RMS</sub> isolating voltage
- UL E78996 approved 



#### Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

#### Major Ratings and Characteristics

Parameters	130MT.KB	160MT.KB	Units
I <sub>O</sub>	130 (160)	160 (200)	A
@ T <sub>C</sub>	85 (62)	85 (60)	°C
I <sub>FSM</sub>	1130	1430	A
@ 50Hz	1180	1500	A
@ 60Hz	6400	10200	A <sup>2</sup> s
i <sup>2</sup> <sub>t</sub>	5800	9300	A <sup>2</sup> s
i <sup>2</sup> <sub>v</sub> t	64000	102000	A <sup>2</sup> √s
V <sub>RRM</sub> range	800 to 1600		V
T <sub>STG</sub> range	-40 to 150		°C
T <sub>J</sub> range	-40 to 150		°C

## 130-160MT..KB Series

Bulletin 127502 rev. A 05/03

International  
**IRF** Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J$ max. mA
130-160MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

#### Forward Conduction

Parameter	130MT.KB	160MT.KB	Units	Conditions
$I_O$ Maximum DC output current @ Case temperature	130 (160)	160 (200)	A	120° Rect conduction angle °C
	85 (62)	85 (60)	°C	
$I_{FSM}$ Maximum peak, one-cycle forward, non-repetitive surge current	1130	1430	A	t = 10ms No voltage
	1180	1500		t = 8.3ms reapplied
	950	1200		t = 10ms 100% $V_{RRM}$
	1000	1260		t = 8.3ms reapplied
$I^2t$ Maximum $I^2t$ for fusing	64000	10200	A <sup>2</sup> s	t = 10ms No voltage
	5800	9300		t = 8.3ms reapplied
	4500	7200		t = 10ms 100% $V_{RRM}$
	4100	6600		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	64000	102000	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.78	0.81	V	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$V_{F(TO)2}$ High level value of threshold voltage	0.99	1.04	V	( $I > \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$r_{F1}$ Low level value of forward slope resistance	4.59	3.52	mΩ	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$r_{F2}$ High level value of forward slope resistance	4.17	3.13	mΩ	( $I > \pi \times I_{F(AV)}$ ), @ $T_J$ max.
$V_{FM}$ Maximum forward voltage drop	1.63	1.49	V	$I_{pk} = 200A$ , $T_J = 25^\circ C$ , $t_p = 400\mu s$ single junction
$V_{INS}$ RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$ , all terminal shorted f = 50Hz, t = 1s

#### Thermal and Mechanical Specifications

Parameter	130MT.KB	160MT.KB	Units	Conditions
$T_J$ Max. junction operating temperature range	-40 to 150		°C	
$T_{stg}$ Max. storage temperature range	-40 to 150		°C	
$R_{thJC}$ Max. thermal resistance, junction to case	0.16	0.12	K/W	DC operation per module
	0.93	0.73		DC operation per junction
	0.18	0.15		120° Rect conduction angle per module
	1.08	0.88		120° Rect conduction angle per junction
$R_{thCS}$ Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque $\pm 10\%$	to heatsink	4 to 6	Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	to terminal	3 to 4		
wt Approximate weight	176		g	



**130-160MT..KB Series**

Bulletin I27502 rev. A 05/03

International  
**IRF** Rectifier

Outline Table (with optional barriers)

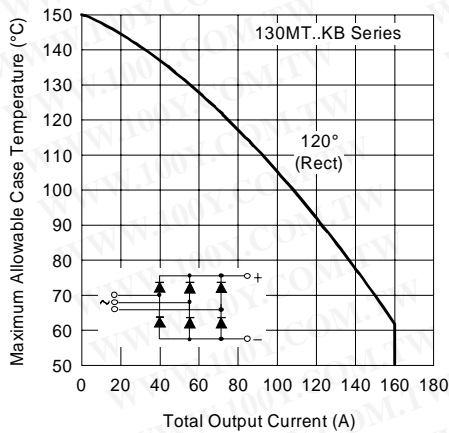
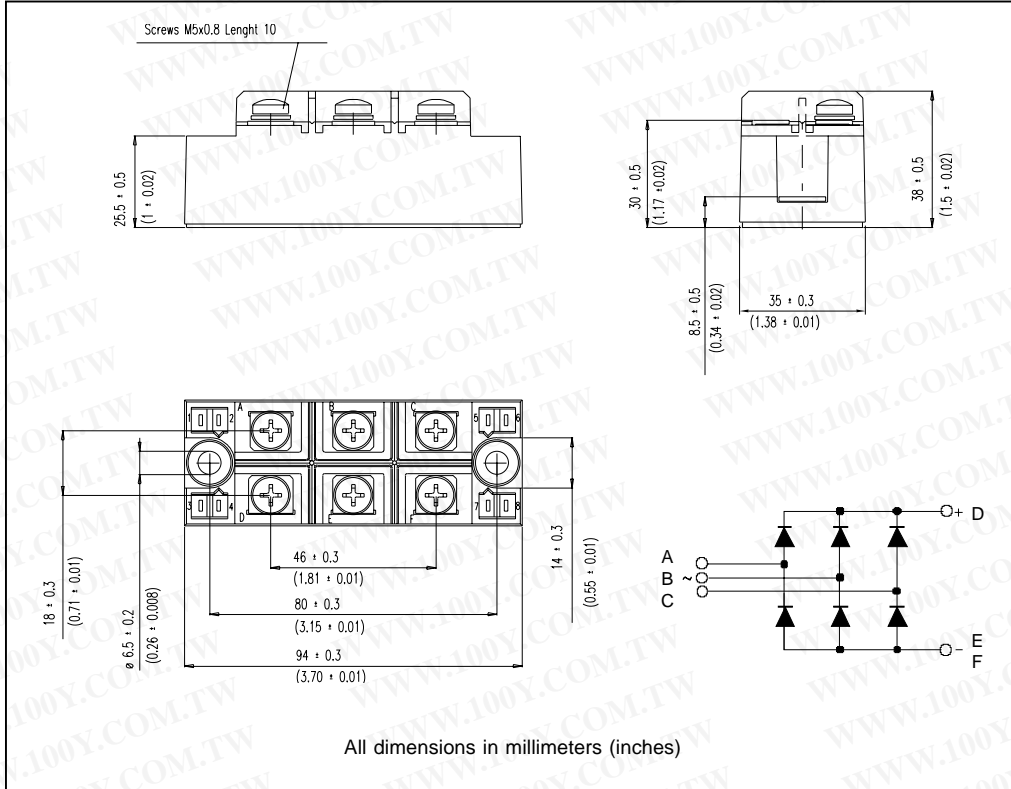


Fig. 1 - Current Ratings Characteristics

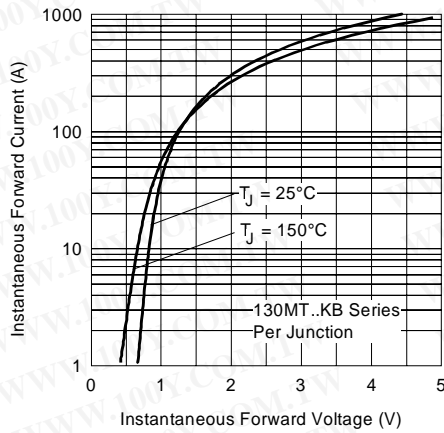


Fig. 2 - Forward Voltage Drop Characteristics

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

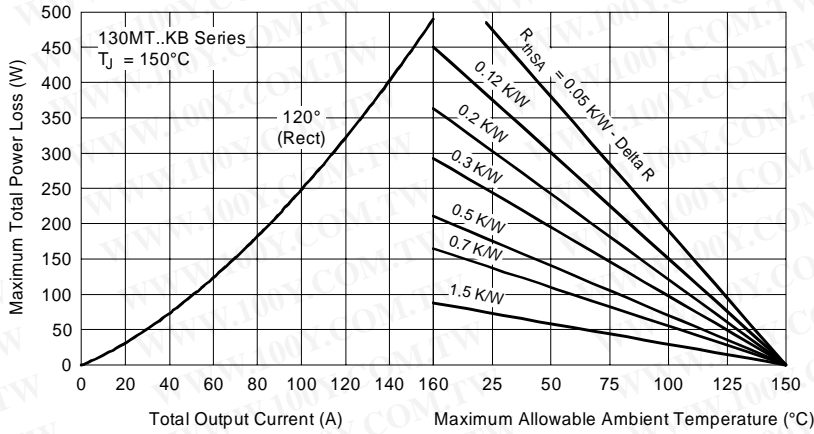


Fig. 3 - Total Power Loss Characteristics

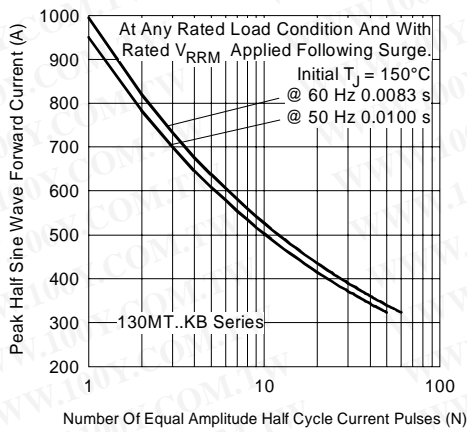


Fig. 4 - Maximum Non-Repetitive Surge Current

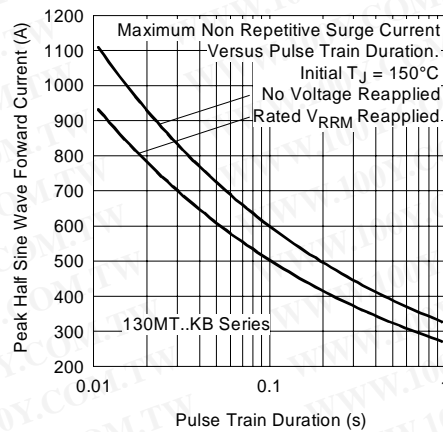


Fig. 5 - Maximum Non-Repetitive Surge Current

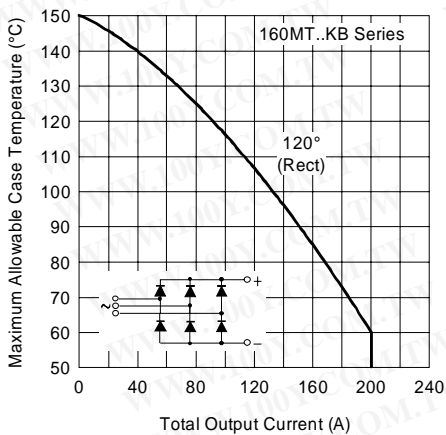


Fig. 6 - Current Ratings Characteristics

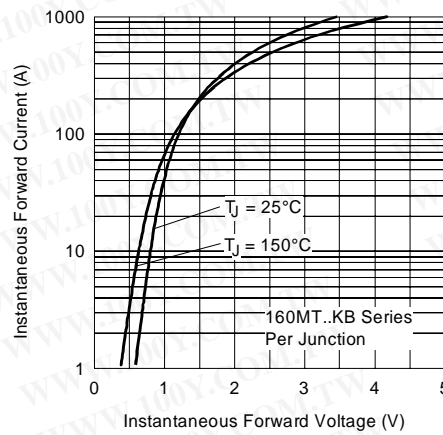


Fig. 7 - Forward Voltage Drop Characteristics

**130-160MT..KB Series**

Bulletin 127502 rev. A 05/03

International  
 Rectifier

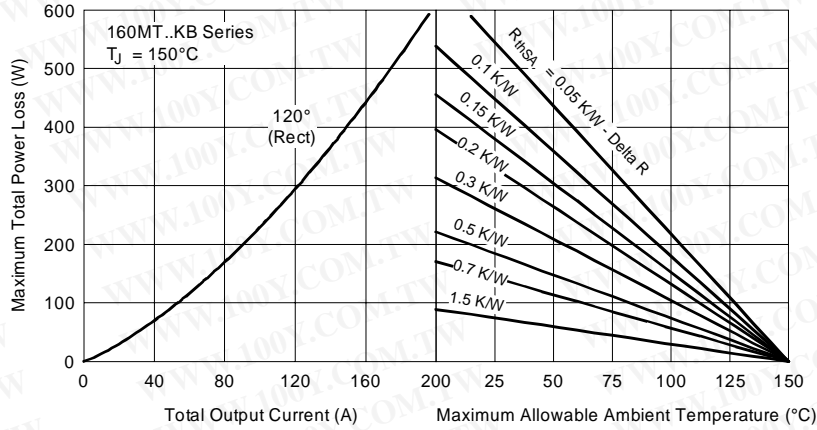


Fig. 8 - Total Power Loss Characteristics

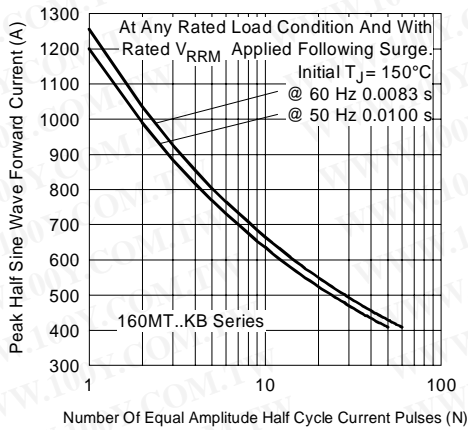


Fig. 9 - Maximum Non-Repetitive Surge Current

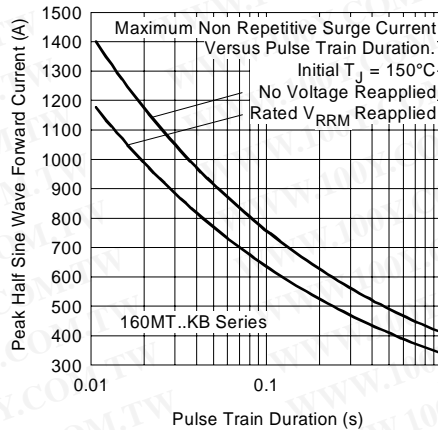


Fig. 10 - Maximum Non-Repetitive Surge Current

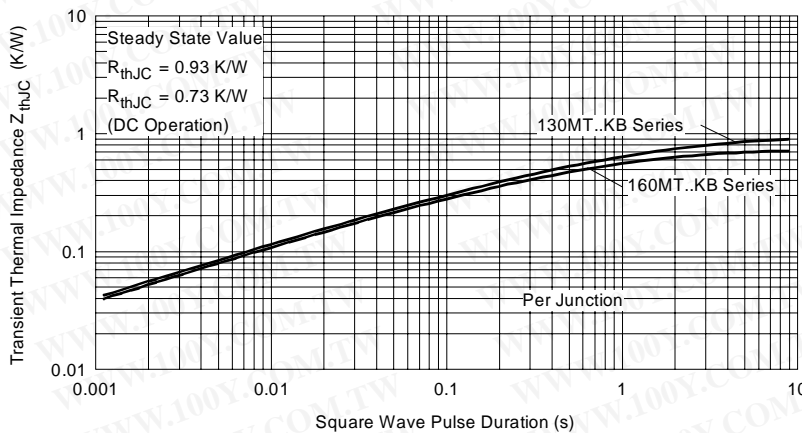


Fig. 11 - Thermal Impedance  $Z_{thJC}$  Characteristic