


保險絲系列 Fuse Series


Cylindrical Fuse-Links

Technical data:

材質 Material: 陶瓷 Porcelain, 銅 Copper
 電壓 Voltage: AC600V
 電流 Current: 1A~125A
 尺寸 Size: 10x38, 14x51, 22x58
 特性 Character: gL/gG, aM, Fast Acting
 短路容量 Breaking capacity: 100kA

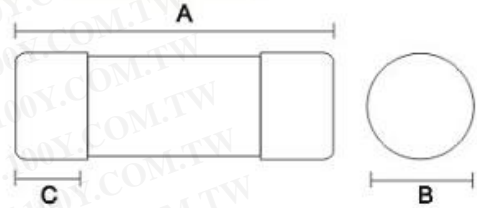

	10X38	14X51	22X58
A	38	51	58
B	10.3	14.3	22.2
C	10.5	13.8	16.2

	Amp.	gL/gG 普通/線路		aM 慢速/馬達	Fast Acting 特快速	Voltage	KA
		Part Number Without Indicator	Part Number With Indicator				
	1	CT-10G01		CT-10M01		600V	100
	2	CT-10G02		CT-10M02		600V	100
	4	CT-10G04		CT-10M04		600V	100
	6	CT-10G06		CT-10M06	CT-10SF6A	600V	100
	8	CT-10G08		CT-10M08		600V	100
	10	CT-10G10		CT-10M10	CT-10SF10	600V	100
	12	CT-10G12		CT-10M12		600V	100
	16	CT-10G16		CT-10M16	CT-10SF16	600V	100
	20	CT-10G20		CT-10M20	CT-10SF20	600V	100
	25	CT-10G25		CT-10M25	CT-10SF25	600V	100
32	CT-10G32		CT-10M32	CT-10SF32	600V	100	
	6	CT-14G06	CT-TP14G06			600V	100
	8	CT-14G08	CT-TP14G08			600V	100
	10	CT-14G10	CT-TP14G10			600V	100
	12	CT-14G12	CT-TP14G12			600V	100
	16	CT-14G16	CT-TP14G16			600V	100
	20	CT-14G20	CT-TP14G20			600V	100
	25	CT-14G25	CT-TP14G25			600V	100
	32	CT-14G32	CT-TP14G32			600V	100
	40	CT-14G40	CT-TP14G40			600V	100
50	CT-14G50	CT-TP14G50			600V	100	
63		CT-TP14G63			600V	100	
	25		CT-TP22G25			600V	100
	40		CT-TP22G40			600V	100
	50	CT-22G50	CT-TP22G50			600V	100
	63	CT-22G63	CT-TP22G63			600V	100
	80	CT-22G80	CT-TP22G80			600V	100
	100	CT-22G100	CT-TP22G100			600V	100
	125	CT-22G125	CT-TP22G125			600V	100