

IGBT MODULE (P-Series)

Features


- Square SC SOA at $10 \times I_C$
- Simplified Parallel Connection
- Narrow Distribution of Characteristics
- High Short Circuit Withstand-Capability

Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Outline Drawing

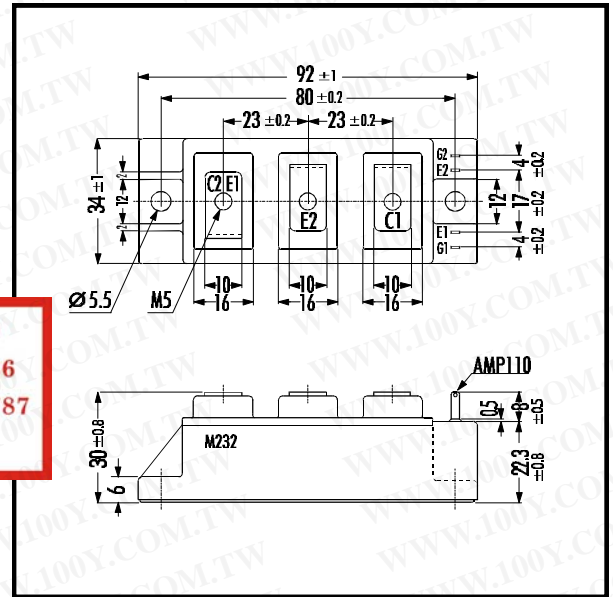


Maximum Ratings and Characteristics

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Items	Symbols	Ratings	Units	
Collector-Emitter Voltage	V_{CES}	1400	V	
Gate -Emitter Voltage	V_{GES}	± 20	V	
Collector Current	Continuous $T_c=25^\circ\text{C}$	I_C	75	
		I_C	50	
	1ms $T_c=25^\circ\text{C}$	I_C PULSE	150	
		1ms $T_c=80^\circ\text{C}$	I_C	100
			$-I_C$	50
Max. Power Dissipation	P_C	400	W	
Operating Temperature	T_j	+150	$^\circ\text{C}$	
Storage Temperature	T_{stg}	-40 ~ +125	$^\circ\text{C}$	
Isolation Voltage	A.C. 1min. V_{is}	2500	V	
Screw Torque	Mounting *1	3.5	Nm	
	Terminals *2	3.5		

Note: *1:Recommendable Value; 2.5 - 3.5 Nm (M5)

Equivalent Circuit






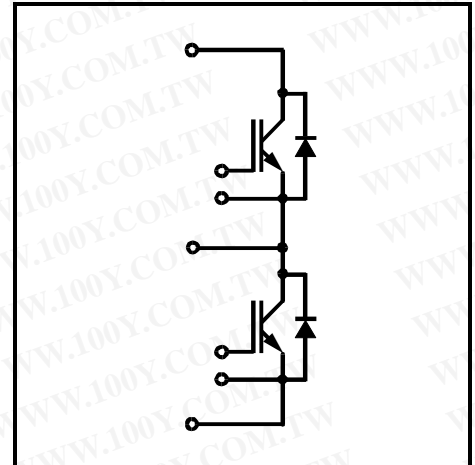


Electrical Characteristics (at $T_f=25^\circ\text{C}$)







Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1400V$			1.0	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	μA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=50\text{mA}$	6.0	8.0	9.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$T_f=25^\circ\text{C}$ $V_{GE}=15V$ $I_C=50A$		2.7	3.0	V
		$T_f=125^\circ\text{C}$ $V_{GE}=15V$ $I_C=50A$		3.3		
Input capacitance	C_{ies}	$V_{GE}=0V$		5000		pF
Output capacitance	C_{oes}	$V_{CE}=10V$		750		
Reverse Transfer capacitance	C_{res}	$f=1\text{MHz}$		330		
Turn-on Time	t_{ON}	$V_{CC}=600V$ $I_C=50A$			1.2	μs
					0.6	
Turn-off Time	t_{OFF}	$V_{GE}=\pm 15V$ $R_G=2,4\Omega$			1.0	
					0.3	
Diode Forward On-Voltage	V_F	$I_F=50A$ $V_{GE}=0V$		2.4	3.3	V
Reverse Recovery Time	t_{rr}	$I_F=50A$			350	ns



Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(f-c)}$	IGBT			0.31	$^\circ\text{C/W}$
	$R_{th(f-c)}$	Diode			0.66	
	$R_{th(c-f)}$	With Thermal Compound		0.05		

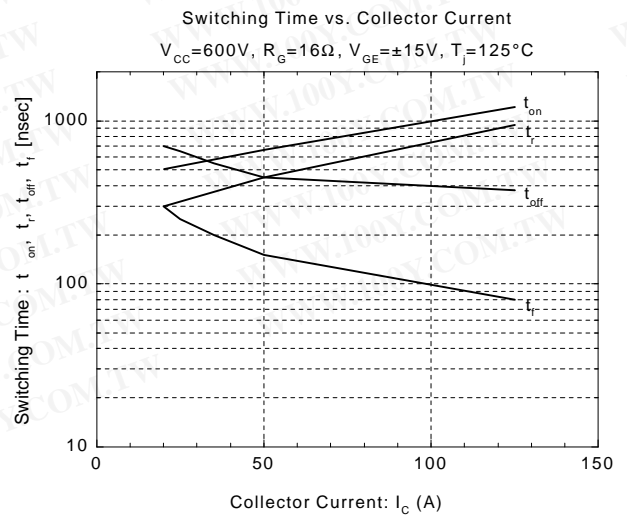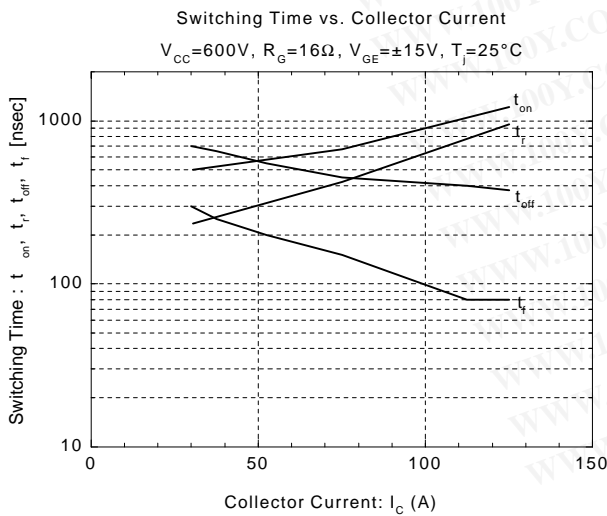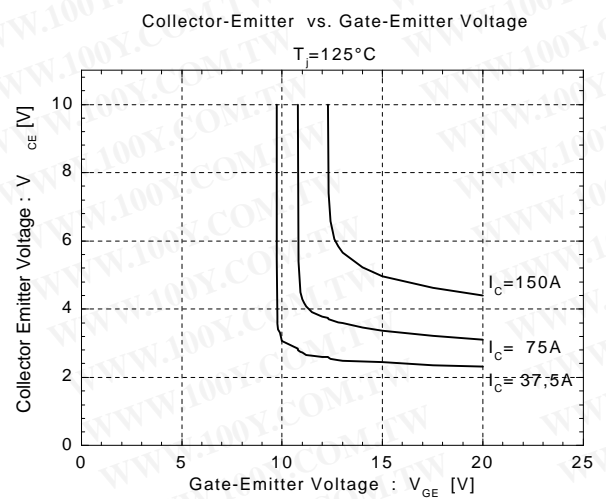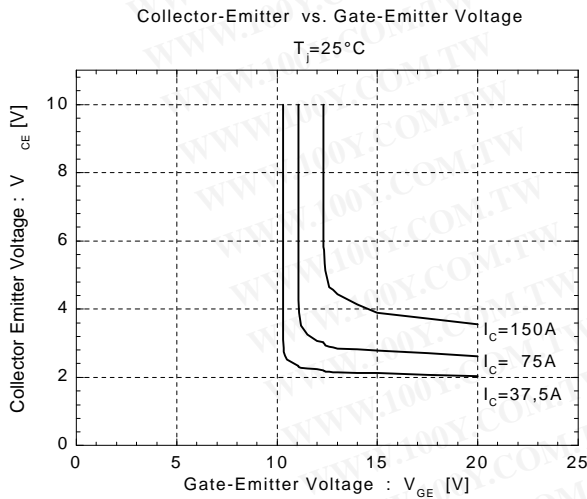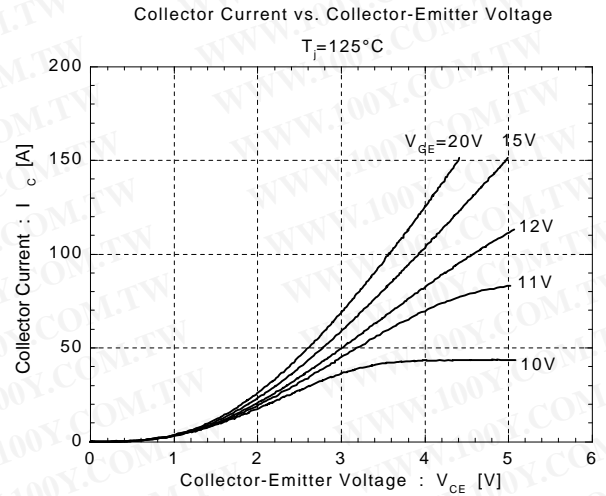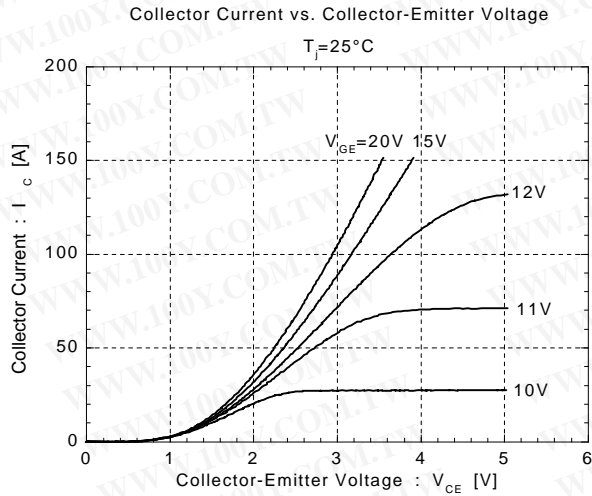

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

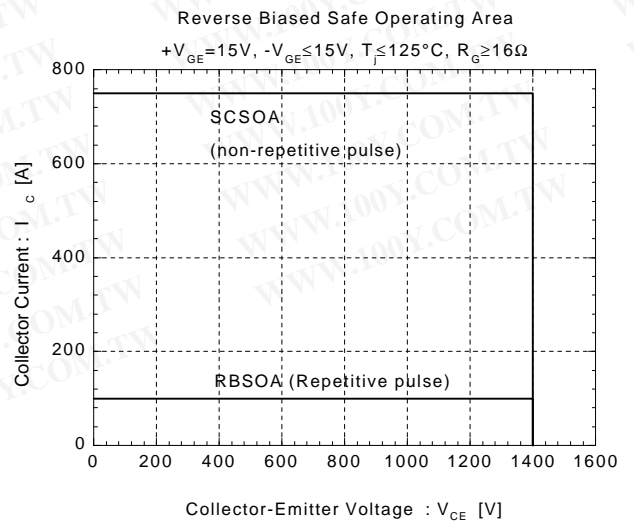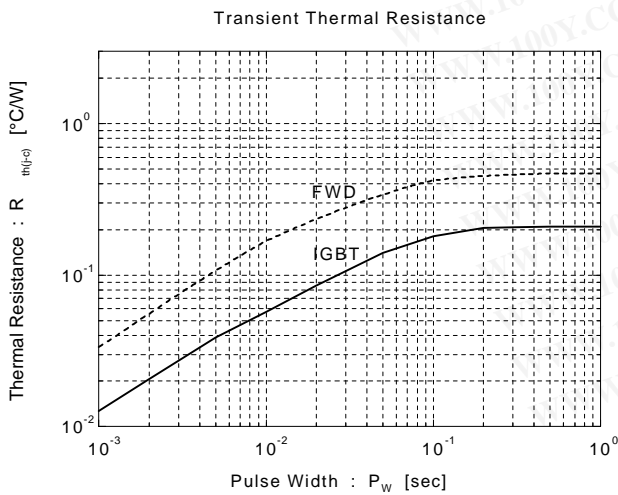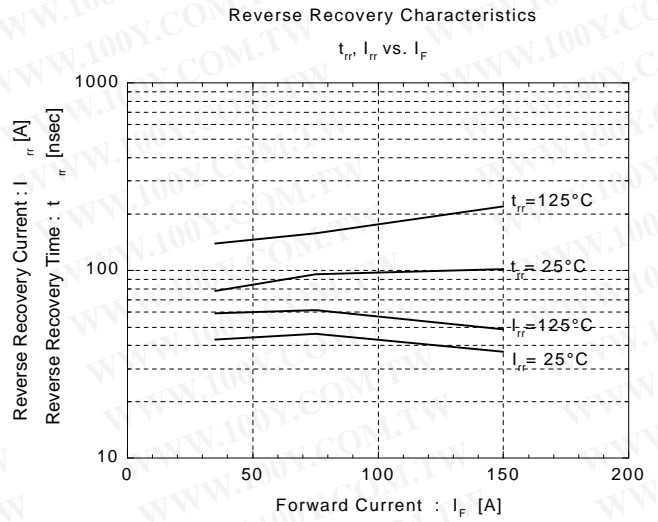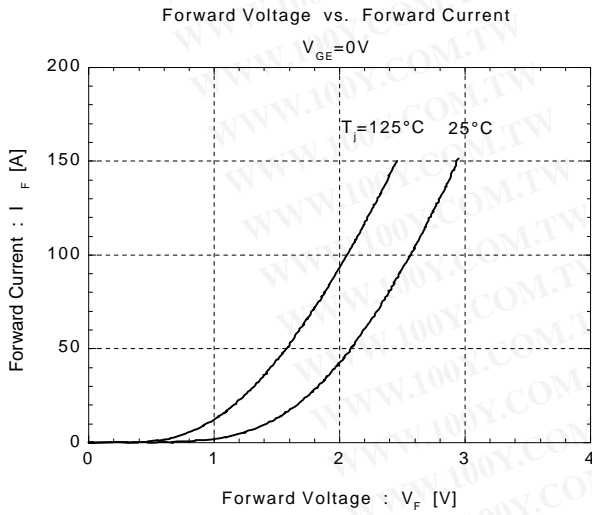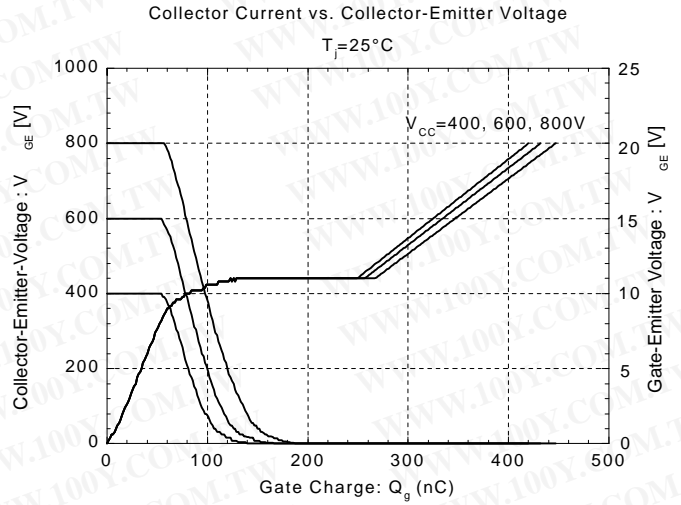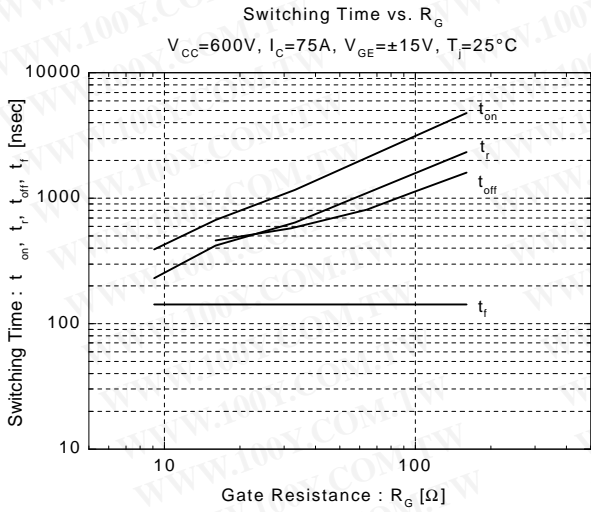

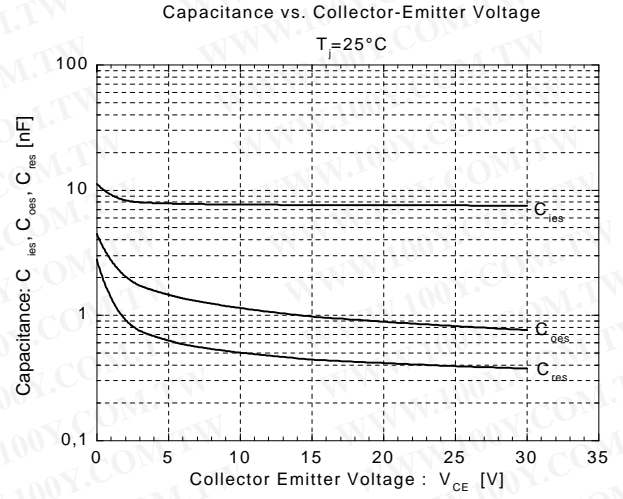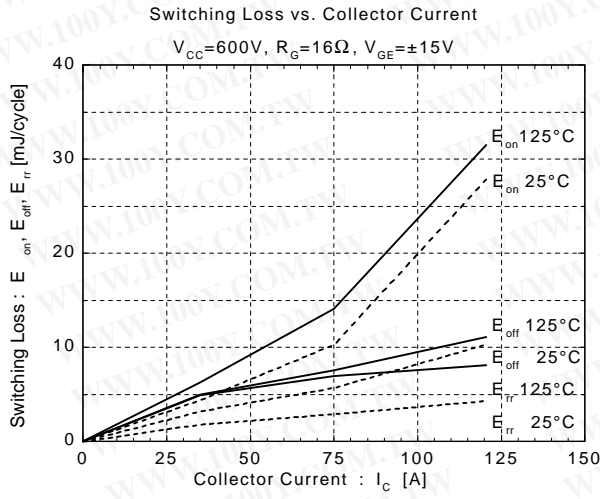

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)