

T-39-11


INTERNATIONAL RECTIFIER

INTERNATIONAL RECTIFIER



HEXFET® TRANSISTORS

**N-Channel
50 VOLT
POWER MOSFETs**



IRFZ30

IRFZ32

**50 Volt, 0.05 Ohm HEXFET
TO-220AB Plastic Package**

The HEXFET technology has expanded its product base to serve the low voltage, very low $R_{DS(on)}$ MOSFET transistor requirements. International Rectifier's highly efficient geometry and unique processing of the HEXFET have been combined to create the lowest on resistance per device performance. In addition to this feature all HEXFETs have documented reliability and parts per million quality!

The HEXFET transistors also offer all of the well established advantages of MOSFETs such as voltage control, very fast switching, ease of paralleling, and temperature stability of the electrical parameters.

They are well suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers, high energy pulse circuits, and in systems that are operated from low voltage batteries, such as automotive, portable equipment, etc.



Product Summary

Part Number	V_{DS}	$R_{DS(on)}$	I_D
IRFZ30	50V	0.05 Ω	30A
IRFZ32	50V	0.07 Ω	25A

Features:

- Extremely Low $R_{DS(on)}$
- Compact Plastic Package
- Fast Switching
- Low Drive Current
- Ease of Paralleling
- Excellent Temperature Stability
- Parts Per Million Quality

CASE STYLE AND DIMENSIONS

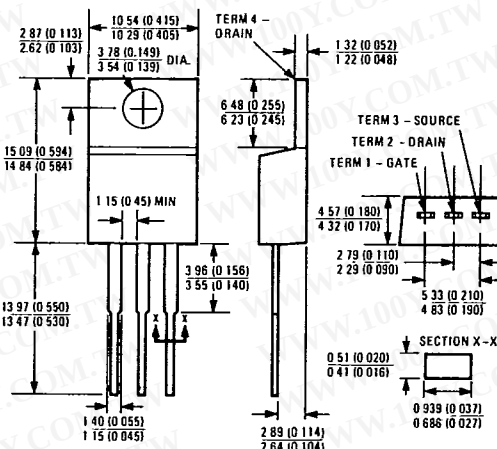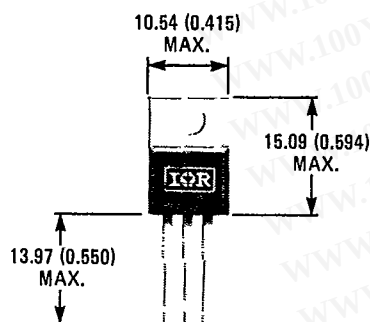

Case Style TO-220AB
Dimensions in Millimeters and (Inches)

C-427

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

IRFZ30, IRFZ32 Devices

11E D 4855452 0008679 0

INTERNATIONAL RECTIFIER


T-39-11

Absolute Maximum Ratings

Parameter	IRFZ30	IRFZ32	Units
V_{DS} Drain - Source Voltage ①	50	50	V
V_{DGR} Drain - Gate Voltage ($R_{GS} = 20\text{ K}\Omega$) ①	50	50	V
$I_D @ T_C = 25^\circ\text{C}$ Continuous Drain Current	30	25	A
$I_D @ T_C = 100^\circ\text{C}$ Continuous Drain Current	19	16	A
I_{DM} Pulsed Drain Current ③	80	60	A
V_{GS} Gate - Source Voltage	± 20		V
$P_D @ T_C = 25^\circ\text{C}$ Max. Power Dissipation	75 (See Fig. 14)		W
Linear Derating Factor	0.6 (See Fig. 14)		W/K ④
I_{LM} Inductive Current, Clamped	80 (See Fig. 15 and 16) $L = 100\mu\text{H}$		A
T_J Operating Junction and Storage Temperature Range	-55 to 150		$^\circ\text{C}$
T_{stg} Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)		$^\circ\text{C}$

Electrical Characteristics @ $T_C = 25^\circ\text{C}$ (Unless Otherwise Specified)

Parameter	Type	Min.	Typ.	Max.	Units	Test Conditions
BV_{DSS} Drain - Source Breakdown Voltage	IRFZ30	50	—	—	V	$V_{GS} = 0\text{V}$
	IRFZ32	50	—	—	V	$I_D = 250\mu\text{A}$
$V_{GS(th)}$ Gate Threshold Voltage	ALL	2.0	—	4.0	V	$V_{DS} = V_{GS}$, $I_D = 250\mu\text{A}$
I_{GSS} Gate-Source Leakage Forward	ALL	—	—	500	nA	$V_{GS} = 20\text{V}$
I_{GSS} Gate-Source Leakage Reverse	ALL	—	—	-500	nA	$V_{GS} = -20\text{V}$
I_{DSS} Zero Gate Voltage Drain Current	ALL	—	—	250	μA	$V_{DS} = \text{Max. Rating}$, $V_{GS} = 0\text{V}$
		—	—	1000	μA	$V_{DS} = \text{Max. Rating} \times 0.8$, $V_{GS} = 0\text{V}$, $T_C = 125^\circ\text{C}$
$I_{D(on)}$ On-State Drain Current ②	IRFZ30	30	—	—	A	$V_{DS} > I_{D(on)} \times R_{DS(on)\text{max}}$, $V_{GS} = 10\text{V}$
	IRFZ32	25	—	—	A	
$R_{DS(on)}$ Static Drain-Source On-State Resistance ②	IRFZ30	—	0.045	0.050	Ω	$V_{GS} = 10\text{V}$, $I_D = 16\text{A}$
	IRFZ32	—	0.065	0.070	Ω	
g_{fs} Forward Transconductance ②	ALL	9.0	12	—	S(1)	$V_{DS} > I_{D(on)} \times R_{DS(on)\text{max}}$, $I_D = 16\text{A}$
C_{iss} Input Capacitance	ALL	—	1250	1600	pF	$V_{GS} = 0\text{V}$, $V_{DS} = 25\text{V}$, $f = 1.0\text{ MHz}$
C_{oss} Output Capacitance	ALL	—	550	800	pF	See Fig. 10
C_{rss} Reverse Transfer Capacitance	ALL	—	130	200	pF	
$t_{d(on)}$ Turn-On Delay Time	ALL	—	12	25	ns	$V_{DD} \approx 25\text{V}$, $I_D = 16\text{A}$, $Z_o = 50\Omega$
t_r Rise Time	ALL	—	16	35	ns	See Fig. 17
$t_{d(off)}$ Turn-Off Delay Time	ALL	—	23	45	ns	(MOSFET switching times are essentially independent of operating temperature.)
t_f Fall Time	ALL	—	16	35	ns	
Q_g Total Gate Charge (Gate-Source Plus Gate-Drain)	ALL	—	26	30	nC	$V_{GS} = 10\text{V}$, $I_D = 38\text{A}$, $V_{DS} = 0.8\text{ Max. Rating}$. See Fig. 18 for test circuit. (Gate charge is essentially independent of operating temperature.)
Q_{gs} Gate-Source Charge	ALL	—	14	—	nC	
Q_{gd} Gate-Drain ("Miller") Charge	ALL	—	12	—	nC	
L_D Internal Drain Inductance	ALL	—	3.5	—	nH	Measured from the contact screw on tab to center of die.
		—	4.5	—	nH	Measured from the drain lead, 6mm (0.25 in.) from package to center of die.
L_S Internal Source Inductance	ALL	—	7.5	—	nH	Measured from the source lead, 6mm (0.25 in.) from package to source bonding pad.



Thermal Resistance

R_{thJC} Junction-to-Case	ALL	—	—	1.67	K/W④	
R_{thCS} Case-to-Sink	ALL	—	1.0	—	K/W④	Mounting surface flat, smooth, and greased.
R_{thJA} Junction-to-Ambient	ALL	—	—	80	K/W④	Typical socket mount

Source-Drain Diode Ratings and Characteristics

I_S	Continuous Source Current (Body Diode)	IRFZ30	—	—	30	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier.
		IRFZ32	—	—	25	A	
I_{SM}	Pulse Source Current (Body Diode) ③	IRFZ30	—	—	80	A	
		IRFZ32	—	—	60	A	
V_{SD}	Diode Forward Voltage ②	IRFZ30	—	—	1.6	V	$T_C = 25^\circ\text{C}$, $I_S = 30\text{A}$, $V_{GS} = 0\text{V}$
		IRFZ32	—	—	1.5	V	$T_C = 25^\circ\text{C}$, $I_S = 25\text{A}$, $V_{GS} = 0\text{V}$
t_{rr}	Reverse Recovery Time	ALL	—	160	—	ns	$T_J = 150^\circ\text{C}$, $I_F = 30\text{A}$, $dI_F/dt = 100\text{A}/\mu\text{s}$
Q_{RR}	Reverse Recovered Charge	ALL	—	1.5	—	μC	$T_J = 150^\circ\text{C}$, $I_F = 30\text{A}$, $dI_F/dt = 100\text{A}/\mu\text{s}$
t_{on}	Forward Turn-on Time	ALL	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $L_S + L_D$.				

① $T_J = 25^\circ\text{C}$ to 150°C .② Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

③ Repetitive Rating: Pulse width limited by

max. junction temperature.

See Transient Thermal Impedance Curve (Fig. 5).

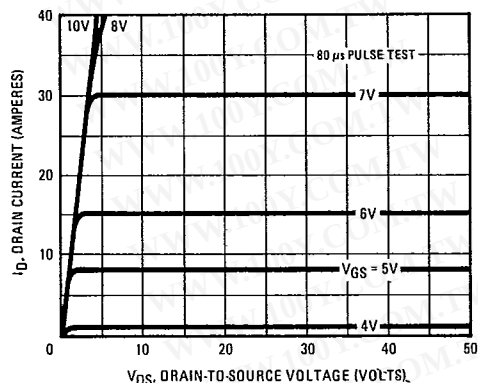
④ $K/W = ^\circ\text{C}/\text{W}$
 $W/K = \text{W}/^\circ\text{C}$ 

Fig. 1 – Typical Output Characteristics

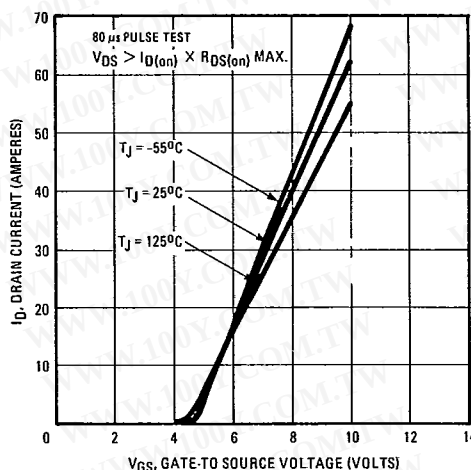


Fig. 2 – Typical Transfer Characteristics

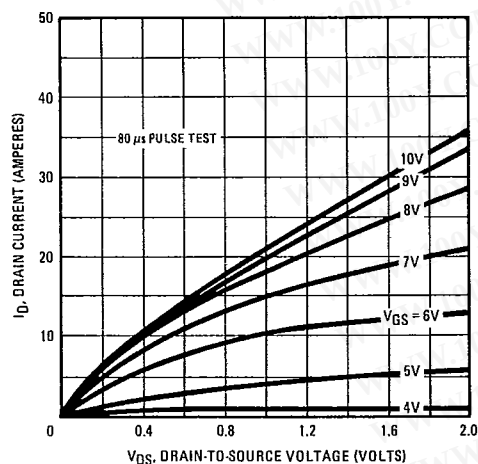


Fig. 3 – Typical Saturation Characteristics

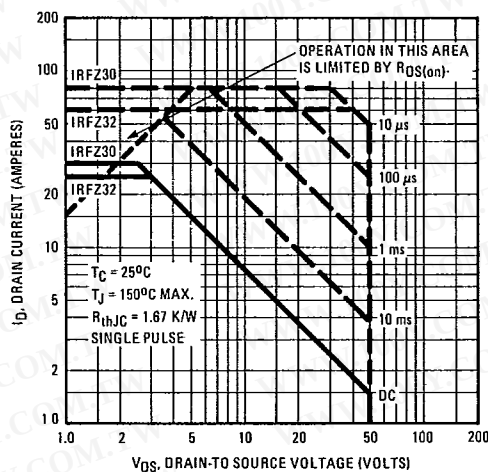


Fig. 4 – Maximum Safe Operating Area

IRFZ30, IRFZ32 Devices

INTERNATIONAL RECTIFIER

T-39-11

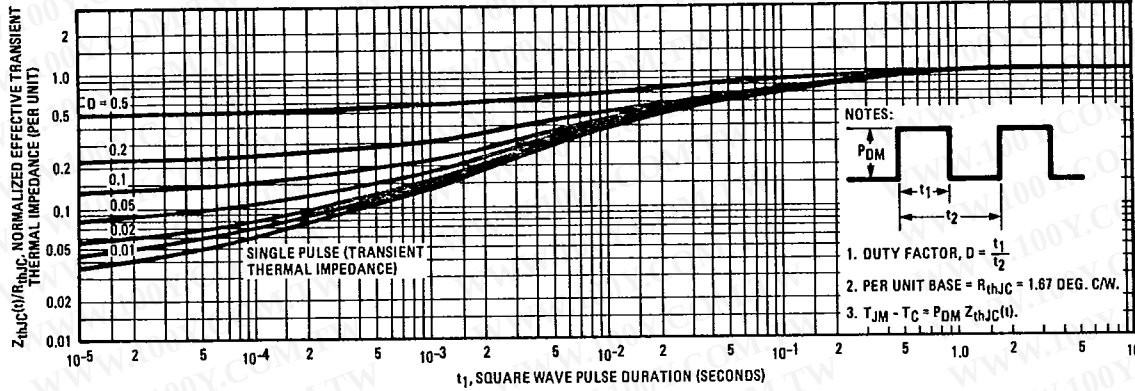


Fig. 5 – Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

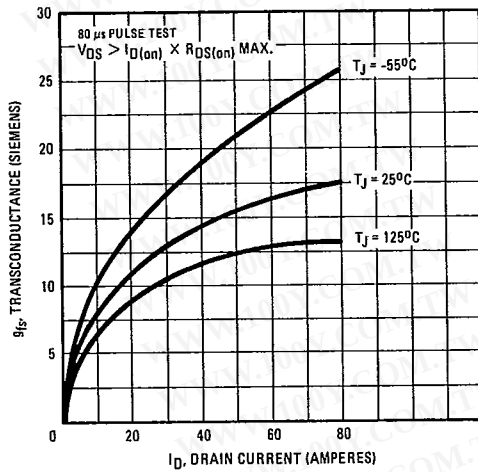


Fig. 6 Typical Transconductance Vs. Drain Current

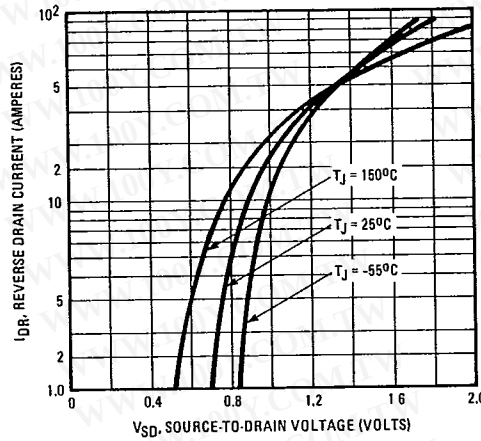


Fig. 7 – Typical Source-Drain Diode Forward Voltage

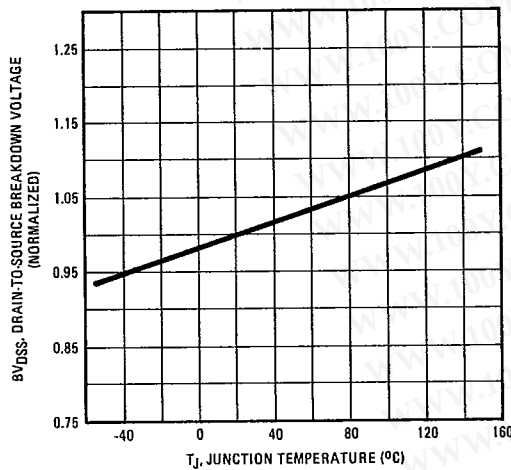


Fig. 8 – Breakdown Voltage Vs. Temperature

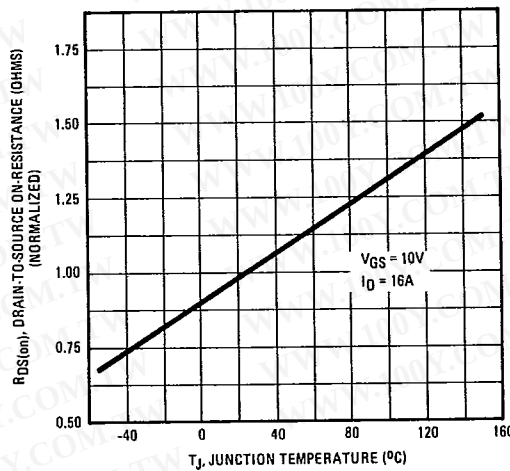


Fig. 9 – Normalized On-Resistance Vs. Temperature

C-430

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

INTERNATIONAL RECTIFIER

IRFZ30, IRFZ32 Devices

T-39-11

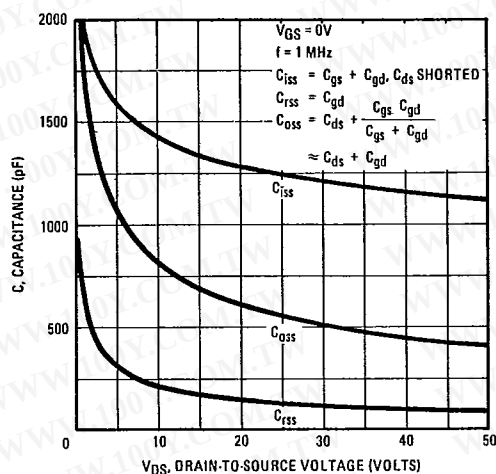


Fig. 10 - Typical Capacitance Vs. Drain-to-Source Voltage

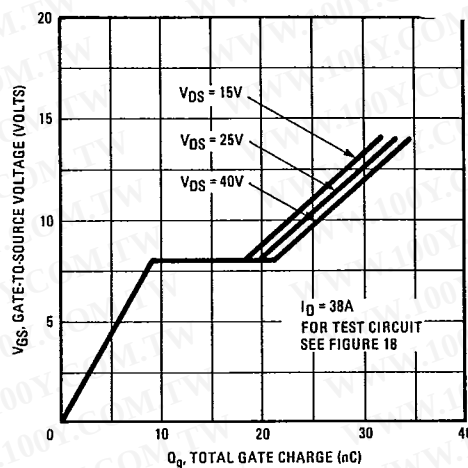


Fig. 11 - Typical Gate Charge Vs. Gate-to-Source Voltage

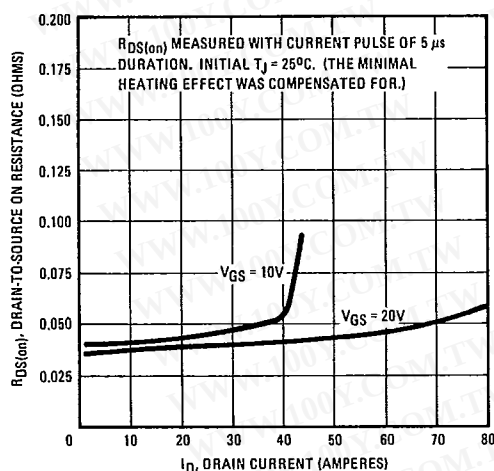


Fig. 12 - Typical On-Resistance Vs. Drain Current

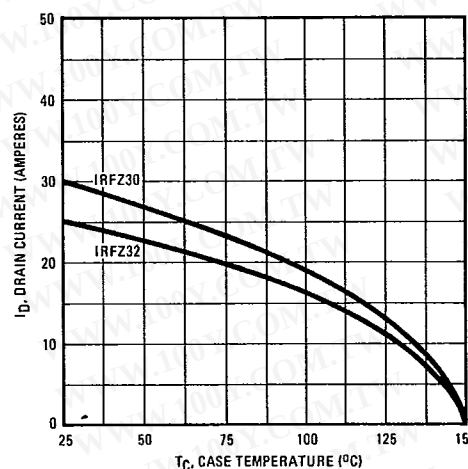


Fig. 13 - Maximum Drain Current Vs. Case Temperature

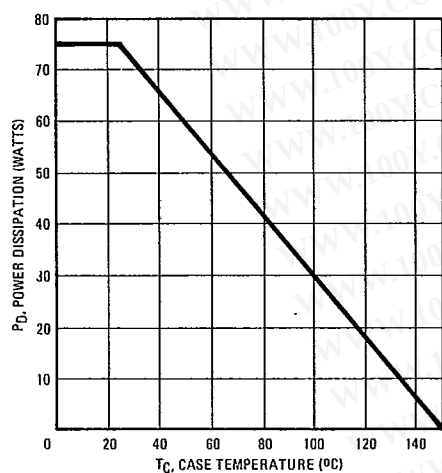


Fig. 14 - Power Vs. Temperature Derating Curve

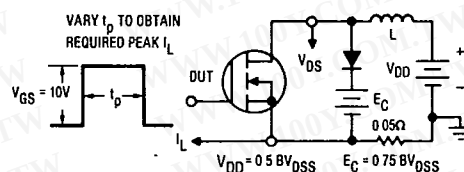


Fig. 15 - Clamped Inductive Test Circuit




Fig. 16 - Clamped Inductive Waveforms

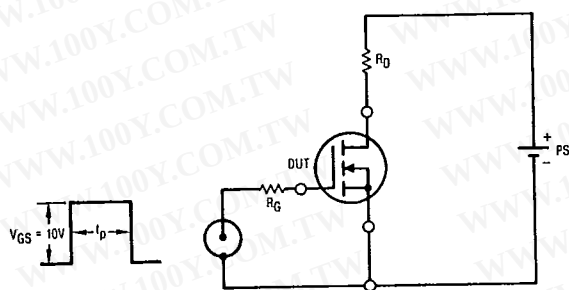


Fig. 17 — Switching Time Test Circuit

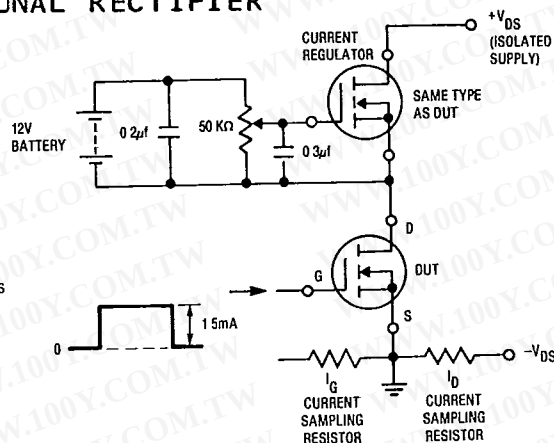
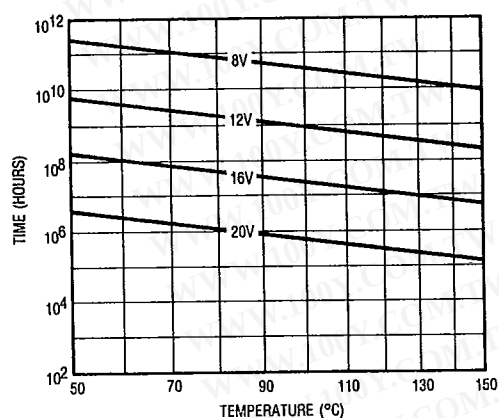
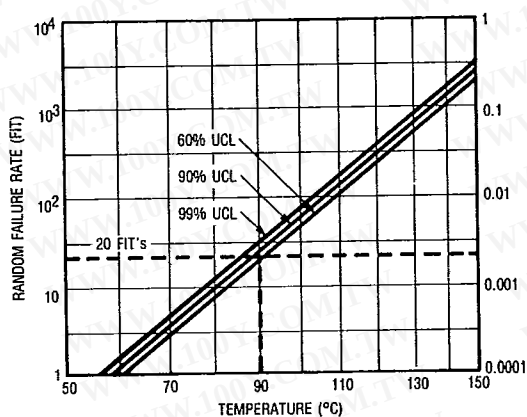


Fig. 18 — Gate Charge Test Circuit



*Fig. 19 — Typical Time to Accumulated 1% Failure



*Fig. 20 — Typical High Temperature Reverse Bias (HTRB) Failure Rate

*The data shown is correct as of April 15, 1987. This information is updated on a quarterly basis; for the latest reliability data, please contact your local IR field office.