



DATA SHEET

1SMA4728~1SMA4764

SURFACE MOUNT SILICON ZENER DIODE

VOLTAGE 3.3 to 100 Volts **POWER** 1.0 Watts

SMA/DO-214AC


Unit: inch (mm)

FEATURES

- For surface mounted applications in order to optimize board space.
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Typical I_R less than 5.0 μ A above 11V
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals
- Pb free product are available : 99% Sn above can meet Rohs environment substance directive request

MECHANICAL DATA

Case: JEDEC DO-214AC, Molded plastic over passivated junction.
Terminals: Solder plated, solderable per MIL-STD-202G, Method 208
Polarity: Color band denotes positive end (cathode)
Standard Packaging: 12mm tape (EIA-481)
Weight: 0.002 ounce, 0.064 gram

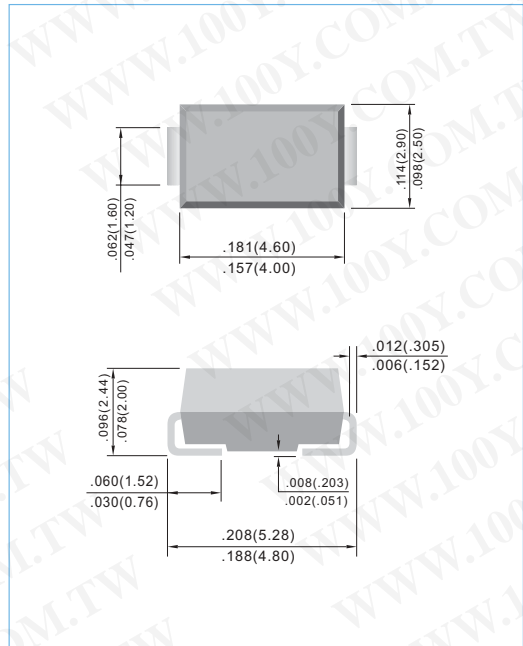

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Units
Peak Pulse Power Dissipation on $T_A=50^\circ\text{C}$ (Notes A) Derate above 50°C	P_D	1.0 6.67	Watts mW / °C
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	10	Amps
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NOTES:

- Mounted on 5.0mm2 (.013mm thick) land areas.
- Measured on 8.3ms, and single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
- Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.





Part Number	V _Z @ I _{ZT}			Maximum Zener Impedance				Maximum Leakage Current		Marking Code	Package
				Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R @ V _R			
	Nom. V	Min. V	Max. V	O	mA	O	mA	uA	V		
1.0 Watt ZENER Diodes -- continued											
1SMA4728	3.3	3.1	3.5	10.0	76.0	400	1.00	100	1.0	728B	SMA
1SMA4729	3.6	3.4	3.8	10.0	69.0	400	1.00	100	1.0	729B	SMA
1SMA4730	3.9	3.7	4.1	9.0	64.0	400	1.00	50	1.0	730B	SMA
1SMA4731	4.3	4.1	4.5	9.0	58.0	400	1.00	10	1.0	731B	SMA
1SMA4732	4.7	4.5	4.9	8.0	53.0	500	1.00	10	1.0	732B	SMA
1SMA4733	5.1	4.8	5.4	7.0	49.0	550	1.00	10	1.0	733B	SMA
1SMA4734	5.6	5.3	5.9	5.0	45.0	600	1.00	10	2.0	734B	SMA
1SMA4735	6.2	5.9	6.5	2.0	41.0	700	1.00	10	3.0	735B	SMA
1SMA4736	6.8	6.5	7.1	3.5	37.0	700	1.00	10	4.0	736B	SMA
1SMA4737	7.5	7.1	7.9	4.0	34.0	700	0.50	10	5.0	737B	SMA
1SMA4738	8.2	7.8	8.6	4.5	31.0	700	0.50	10	6.0	738B	SMA
1SAM4739	9.1	8.6	9.6	5.0	28.0	700	0.50	10	7.0	739B	SMA
1SMA4740	10.0	9.5	10.5	7.0	25.0	700	0.25	10	7.6	740B	SMA
1SMA4741	11.0	10.5	11.6	8.0	23.0	700	0.25	0.1	8.4	741B	SMA
1SMA4742	12.0	11.4	12.6	9.0	21.0	700	0.25	0.1	9.1	742B	SMA
1SMA4743	13.0	12.4	13.7	10.0	19.0	700	0.25	0.1	9.9	743B	SMA
1SMA4744	15.0	14.3	15.8	14.0	17.0	700	0.25	0.1	11.4	744B	SMA
1SMA4745	16.0	15.2	16.8	16.0	15.5	700	0.25	0.1	12.2	745B	SMA
1SMA4746	18.0	17.1	18.9	20.0	14.0	750	0.25	0.1	13.7	746B	SMA
1SMA4747	20.0	19.0	21.0	22.0	12.5	750	0.25	0.1	15.2	747B	SMA
1SMA4748	22.0	20.9	23.1	23.0	11.5	750	0.25	0.1	16.7	748B	SMA
1SMA4749	24.0	22.8	25.2	25.0	10.5	750	0.25	0.1	18.2	749B	SMA
1SMA4750	27.0	25.7	28.4	35.0	9.5	750	0.25	0.1	20.6	750B	SMA
1SMA4751	30.0	28.5	31.5	40.0	8.5	1000	0.25	0.1	22.8	751B	SMA
1SMA4752	33.0	31.4	34.7	45.0	7.5	1000	0.25	0.1	25.1	752B	SMA
1SMA4753	36.0	34.2	37.8	50.0	7.0	1000	0.25	0.1	27.4	753B	SMA
1SMA4754	39.0	37.1	41	60.0	6.5	1000	0.25	0.1	29.7	754B	SMA
1SMA4755	43.0	40.9	45.2	70.0	6.0	1500	0.25	0.1	32.7	755B	SMA
1SMA4756	47.0	44.7	49.4	80.0	5.5	1500	0.25	0.1	35.8	756B	SMA
1SMA4757	51.0	48.5	53.6	95.0	5.0	1500	0.25	0.1	38.8	757B	SMA
1SMA4758	56.0	53.2	58.8	110	4.5	2000	0.25	0.1	42.6	758B	SMA
1SMA4759	62.0	58.9	65.1	125	4.0	2000	0.25	0.1	47.1	759B	SMA
1SMA4760	68.0	64.6	71.4	150	3.7	2000	0.25	0.1	51.7	760B	SMA
1SMA4761	75.0	71.3	78.8	175	3.3	2000	0.25	0.1	56.0	761B	SMA
1SMA4762	82.0	77.9	86.1	200	3.0	3000	0.25	0.1	62.2	762B	SMA
1SMA4763	91.0	86.5	95.6	250	2.8	3000	0.25	0.1	69.2	763B	SMA
1SMA4764	100	95.0	105	350	2.5	3000	0.25	0.1	76.0	764B	SMA



NOTE:

1. Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$
2. Specials Available Include:
 - A. Nominal zener voltages between the voltages shown and tighter voltage tolerances.
 - B. Matched sets.
3. Zener Voltage (V_Z) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (T_L) at $30^\circ\text{C} \pm 1^\circ\text{C}$, from the diode body.
4. Zener Impedance (Z_Z) Derivation. The zener impedance is derived from the 60 cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} .
5. Surge Current (I_r) Non-Repetitive. The rating listed in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2

RATING AND CHARACTERISTICS CURVES

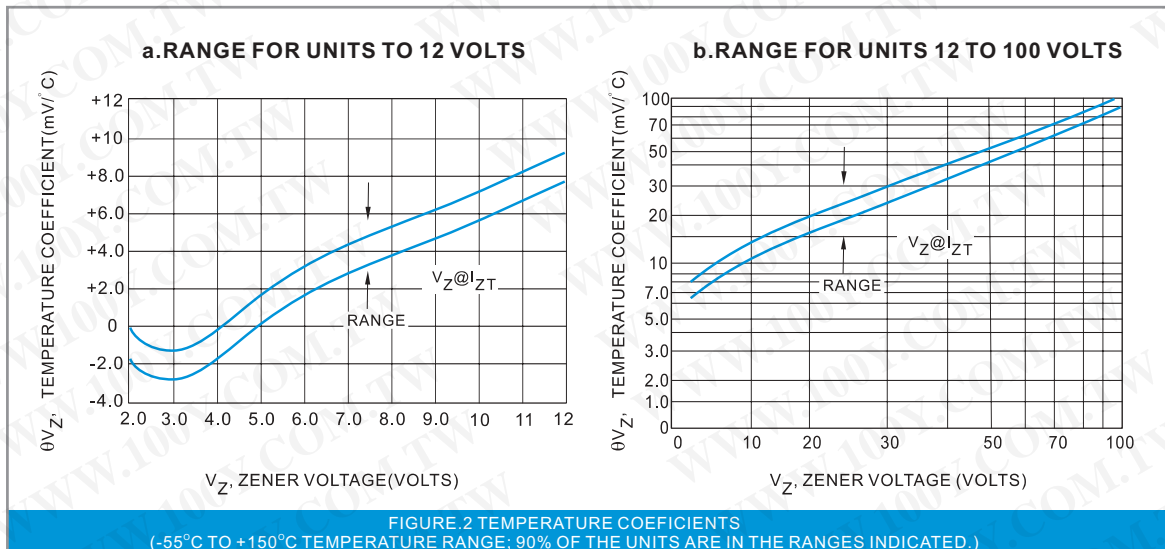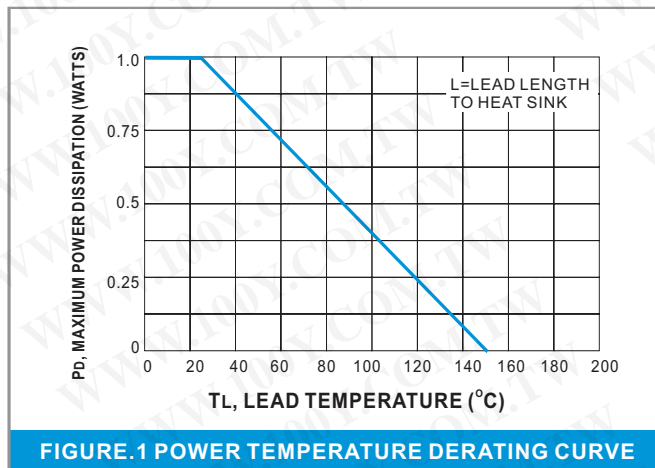

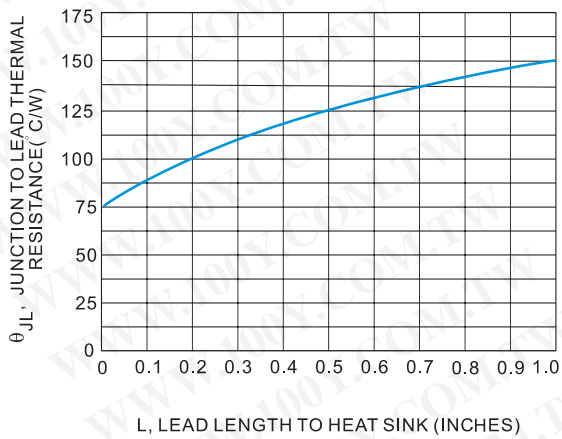


FIGURE.3 TYPICAL THERMAL RESISTANCE versus LEAD LENGTH


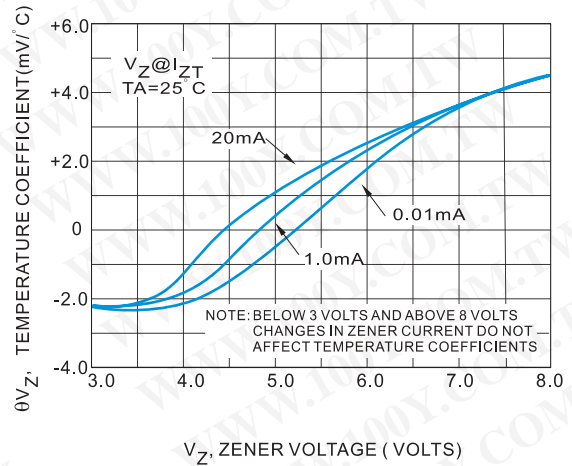


FIGURE.4 EFFECT OF ZENER CURRENT

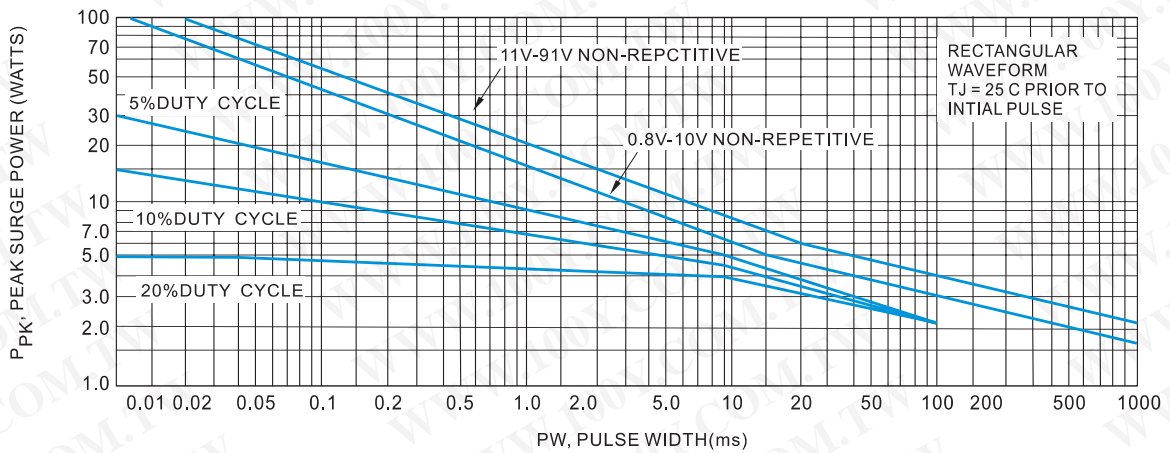

This graph represents 90 percentile data points.
 FOR worst-case design characteristics, multiply surge power by 2/3

FIGURE.5 MAXIMUM SURGE POWER

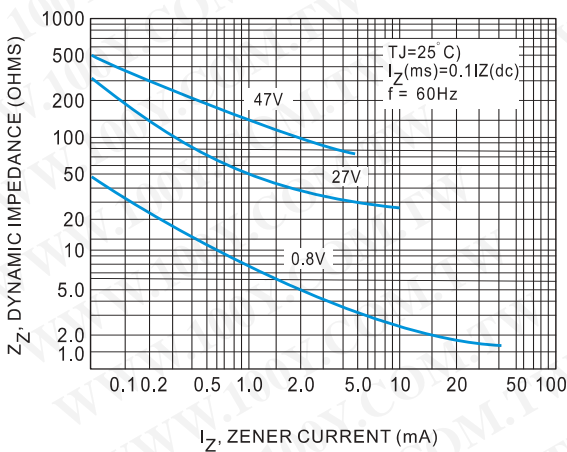


FIGURE.6 EFFECT OF ZENER CURRENT ON ZENER IMPEDANCE

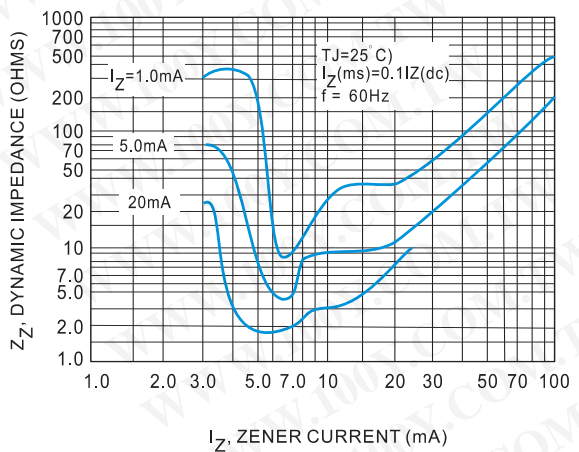


FIGURE.7 EFFECT OF ZENER VOLTAGE ON ZENER IMPEDANCE

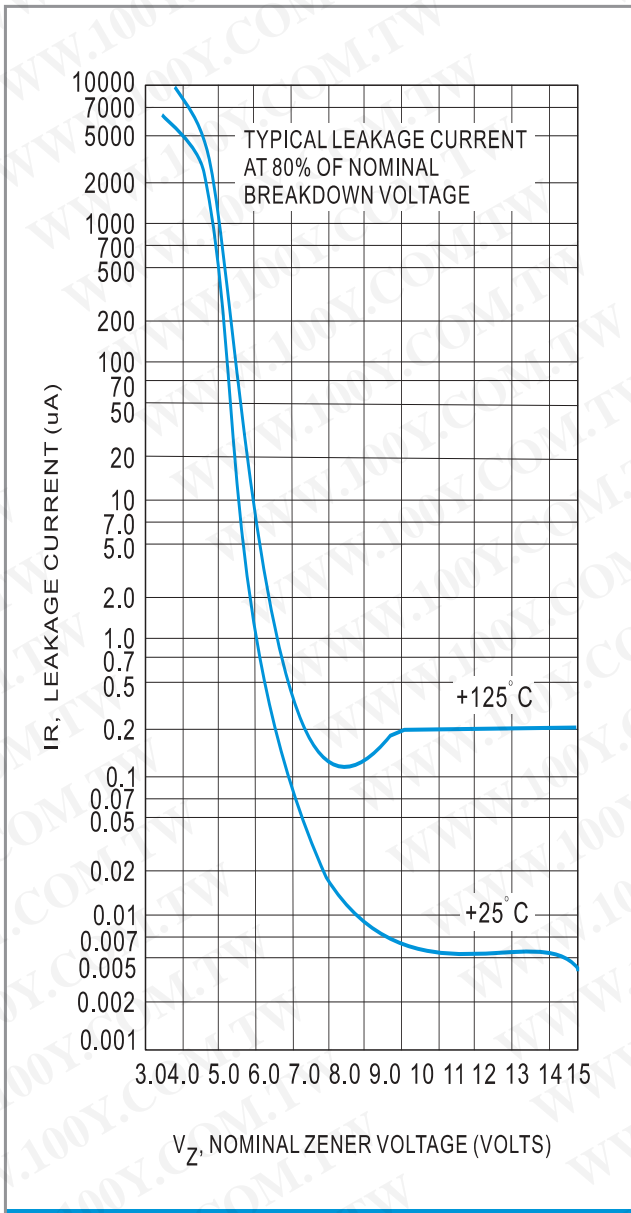


FIGURE.8 TYPICAL LEAKAGE CURRENT

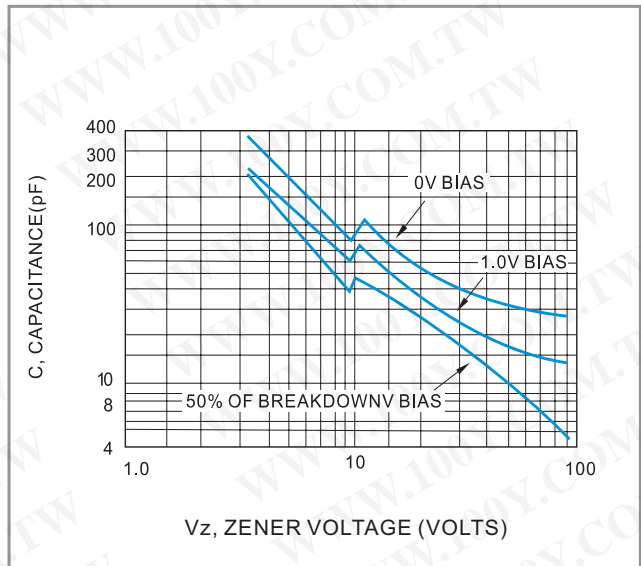


FIGURE.9 TYPICAL CAPACITANCE versus V_z

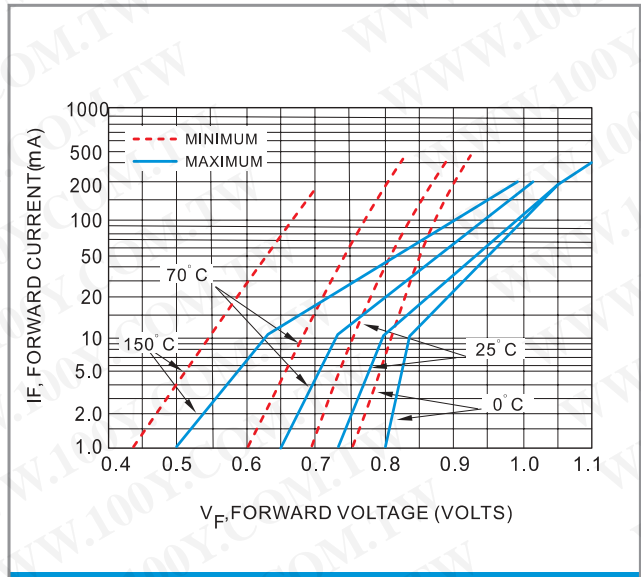


FIGURE.10 TYPICAL FORWARD CHARACTERISTICS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)