



# DATA SHEET

## BC856 SERIES

### PNP GENERAL PURPOSE TRANSISTORS

**VOLTAGE** 65/45/30 Volts **POWER** 225 mW


**SOT-23** Unit: inch (mm)

#### FEATURES

General Purpose Amplifier Applications  
NPN Epitaxial Silicon, Planar Design  
Collector Current  $I_C = -100\text{mA}$   
Complimentary (PNP) Devices : BC846/BC847/BC848/BC849 Series  
Pb free product are available : 99% Sn above can meet RoHS environment substance directive request


#### MECHANICAL DATA

Case: SOT-23  
Terminals : Solderable per MIL-STD-750, Method 2026  
Approx Weight: 0.008 grams  
Device Marking :

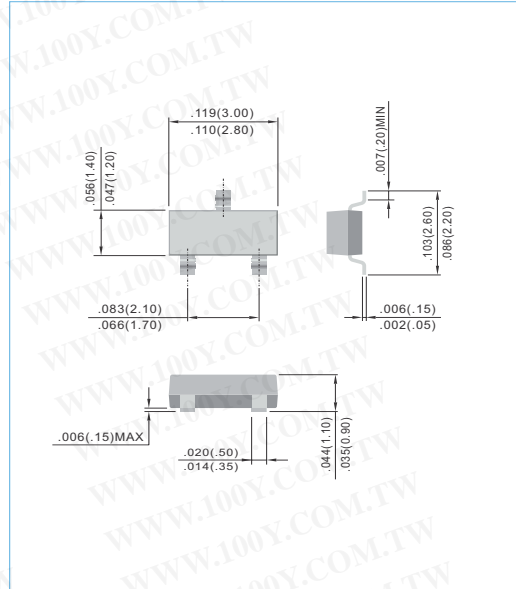

BC856A=56A	BC857A=57A	BC858A=58A	
BC856B=56B	BC857B=57B	BC858B=58B	BC859B=59B
	BC857C=57C	BC858C=58C	BC859C=59C

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

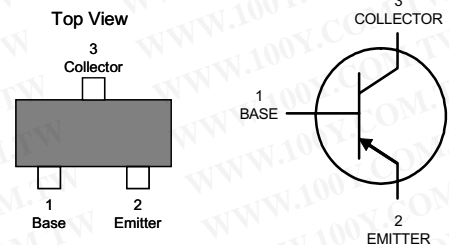

#### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	BC856	BC857	BC858	BC859	UNITS
Collector-Emitter Voltage	$V_{CE0}$	-65	-45	-30		V
Collector-Base Voltage	$V_{CB0}$	-80	-50	-30		V
Emitter-Base Voltage	$V_{EB0}$		-5			V
Collector Current-Continuous	$I_C$		-100			mA
Max Power Dissipation (Note 1)	$P_{TOT}$		225			mW
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$		-50 TO +150			°C



# BC856 SERIES

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	Value	UNIT
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	556	$^{\circ}\text{C}/\text{W}$

Note 1: Transistor mounted on FR-5 board 1.0 x 0.75 x 0.062 in. Minimum pad layout.

## ELECTRICAL CHARACTERISTICS ( $T_J=25\text{ C}$ , unless otherwise noted)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	
Collector - Emitter Breakdown Voltage ( $I_C=10\text{mA}$ , $I_B=0$ )	BC856A,B	-65	-	-	V	
	BC857A,B,C	-45	-	-		
	BC858A,B,C, BC859B,C	-30	-	-		
Collector - Base Breakdown Voltage ( $I_C=10\mu\text{A}$ , $I_E=0$ )	BC856A,B	-80	-	-	V	
	BC857A,B,C	-50	-	-		
	BC858A,B,C, BC859B,C	-30	-	-		
Emitter - Base Breakdown Voltage ( $I_E=-1\mu\text{A}$ , $I_C=0$ )	$V_{(BR)EB0}$	-5.0	-	-	V	
Emitter-Base Cutoff Current ( $V_{EB}=-5\text{V}$ )	$I_{EBO}$	-	-	-100	nA	
Collector-Base Cutoff Current ( $V_{CB}=-30\text{V}$ , $I_E=0$ )	$I_{CBO}$	$T_J=150\text{ }^{\circ}\text{C}$	-	-	-15	nA
			-	-	-4.0	$\mu\text{A}$
DC Current Gain ( $I_C=10\mu\text{A}$ , $V_{CE}=5\text{V}$ )	BC856A, BC857A, BC858A	-	90	-	-	
	BC856B, BC857B, BC858B, BC859B	-	150	-		
	BC857C, BC858C, BC859C	-	270	-		
DC Current Gain ( $I_C=2.0\text{mA}$ , $V_{CE}=5\text{V}$ )	BC856A, BC857A, BC858A	110	180	220	-	
	BC856B, BC857B, BC858B, BC859B	200	290	450		
	BC857C, BC858C, BC859C	420	520	800		
Collector - Emitter Saturation Voltage ( $I_C=10\text{mA}$ , $I_B=0.5\text{mA}$ )	$V_{CE(SAT)}$		-	-	-0.3	V
		( $I_C=100\text{mA}$ , $I_B=5.0\text{mA}$ )	-	-	-0.65	
Base - Emitter Saturation Voltage ( $I_C=10\text{mA}$ , $I_B=0.5\text{mA}$ )	$V_{BE(SAT)}$		-	-0.7	-	V
		( $I_C=100\text{mA}$ , $I_B=5.0\text{mA}$ )	-	-0.9	-	
Base - Emitter On Voltage ( $I_C=2.0\text{mA}$ , $V_{CE}=5.0\text{V}$ )	$V_{BE(ON)}$		-0.60	-	-0.75	V
		( $I_C=10\text{mA}$ , $V_{CE}=5.0\text{V}$ )	-	-	-0.82	
Collector - Base Capacitance ( $V_{CB}=-10\text{V}$ , $I_E=0$ , $f=1\text{MHz}$ )	$C_{CB}$	-	-	4.5	pF	
Current-Gain - Bandwidth Product ( $I_C=10\text{mA}$ , $V_{CE}=5.0\text{V}$ , $f=100\text{MHz}$ )	$F_T$	-	200	-	MHz	



# BC856 SERIES

## ELECTRICAL CHARACTERISTICS CURVES

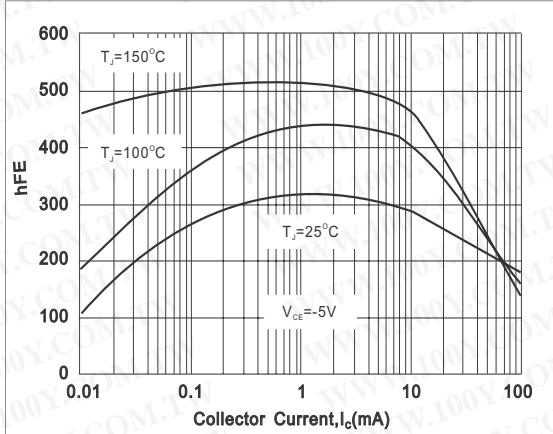


Fig.1- TYPICAL  $h_{FE}$  vs. Collector Current

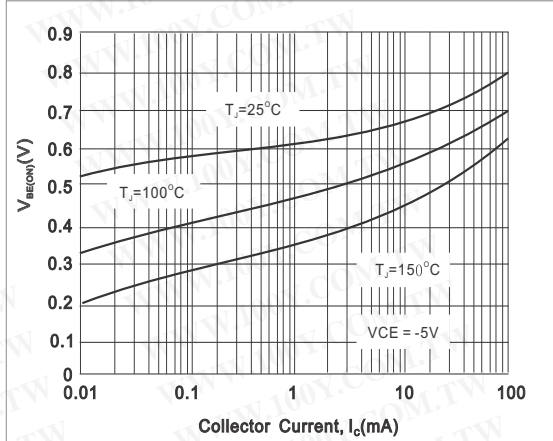


Fig.2- TYPICAL  $V_{BE(ON)}$  vs. Collector Current

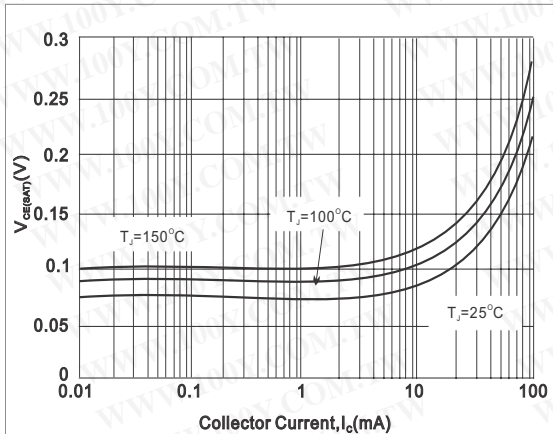


Fig.3- TYPICAL  $V_{CE(SAT)}$  vs. Collector Current


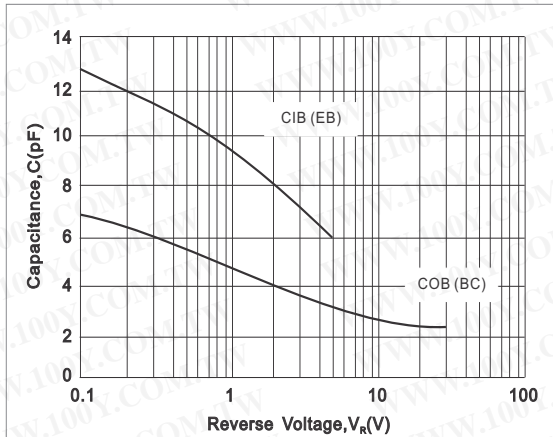


Fig.4- TYPICAL CAPACITANCES vs. REVERSE VOLTAGE

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



## MOUNTING PAD LAYOUT

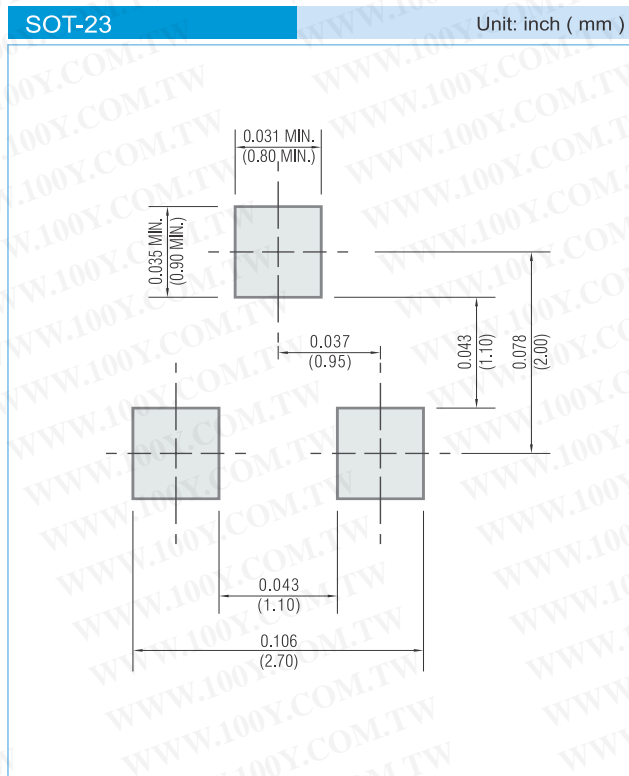

## ORDER INFORMATION

- Packing information

T/R - 12K per 13" plastic Reel

T/R - 3K per 7" plastic Reel

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
**Http://www.100y.com.tw**

## LEGAL STATEMENT

### IMPORTANT NOTICE

This information is intended to unambiguously characterize the product in order to facilitate the customer's evaluation of the device in the application. The information will help the customer's technical experts determine that the device is compatible and interchangeable with similar devices made by other vendors. The information in this data sheet is believed to be reliable and accurate. The specifications and information herein are subject to change without notice. New products and improvements in products and product characterization are constantly in process. Therefore, the factory should be consulted for the most recent information and for any special characteristics not described or specified.

### Copyright Pan Jit International Inc. 2003

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract. The information presented is believed to be accurate and reliable, and may change without notice in advance. No liability will be accepted by the publisher for any consequence of use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.