

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07669

2SC3280

SILICON NPN TRIPLE DIFFUSED TYPE

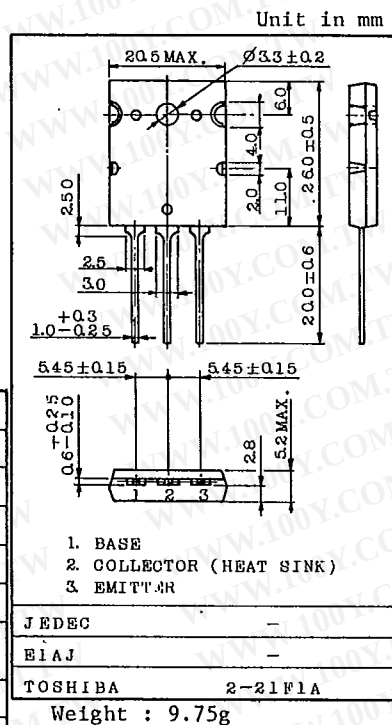
POWER AMPLIFIER APPLICATIONS.

FEATURES:

- Complementary to 2SA1301
- Recommend for 80W High Fidelity Audio Frequency Amplifier Output Stage.

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	160	V
Collector-Emitter Voltage	V_{CE0}	160	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current	I_C	12	A
Base Current	I_B	1.2	A
Collector Power Dissipation ($T_c=25^\circ\text{C}$)	P_C	120	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CB0}	$V_{CB}=160\text{V}, I_E=0$	-	-	5.0	μA
Emitter Cut-off Current	I_{EB0}	$V_{EB}=5\text{V}, I_C=0$	-	-	5.0	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CE0}$	$I_C=50\text{mA}, I_B=0$	160	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=5\text{V}, I_C=1\text{A}$	55	-	160	
	$h_{FE(2)}$	$V_{CE}=5\text{V}, I_C=6\text{A}$	35	74	-	
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=8\text{A}, I_B=0.8\text{A}$	-	0.35	2.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5\text{V}, I_C=6\text{A}$	-	1.0	1.5	V
Transition Frequency	f_T	$V_{CE}=5\text{V}, I_C=1\text{A}$	-	30	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, I_E=0; f=1\text{MHz}$	-	220	-	pF

Note : $h_{FE(1)}$ Classification R : 55 ~ 110, O : 80 ~ 160

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07670

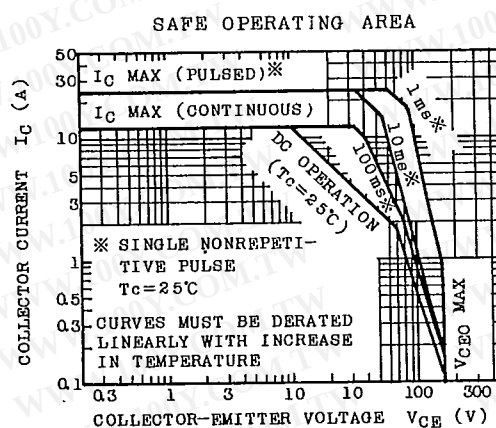
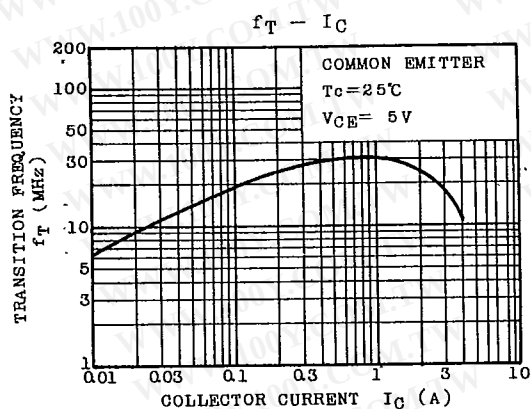
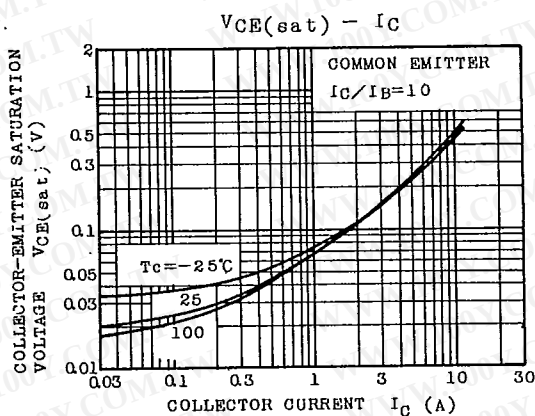
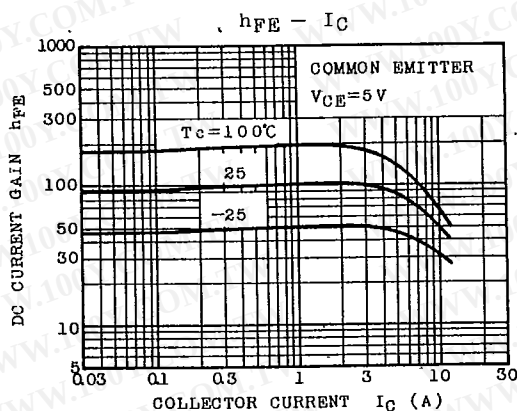
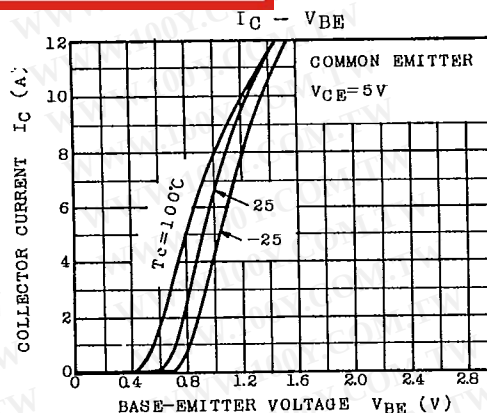
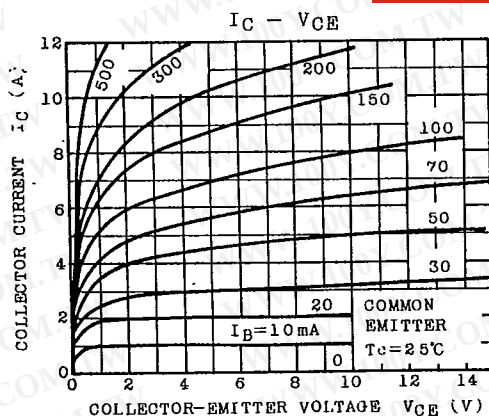
DT-33-13

2SC3280

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

TOSHIBA CORPORATION