

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

Think of Frequency Think of **TXC**
 come visit our site <http://www.txcocrystal.com>

Oscillators
Series

SMD TCXO 2.5 x 2.0 x 0.8 mm 7L Series

Features


- Temperature Stability: $\pm 0.5 \text{ ppm} \sim \pm 2.0 \text{ ppm}$
- Operating Temperature Range: $-30^\circ\text{C} \sim 85^\circ\text{C}$
- Supply Voltage: 1.8 V $\sim$ 3.3 V
- Voltage Control Function Available
- Frequencies: 16.367667 MHz, 16.368 MHz, 16.369 MHz, 19.2 MHz, 26 MHz, 33.6 MHz, 38.4 MHz, 40 MHz
- Applications: GPS, WiMAX, Cellular and Wireless Communications
- RoHS Compliant / Pb Free



Remark: Specification s


Electrical Specifications

Item / Type	7L
Output Type	Clipped Sinewave
Output Load	10K Ω // 10 pF
Oscillation Mode	Fundamental
Supply Voltage	1.8 $\sim$ 3.3 V
Frequency Range	13 $\sim$ 52 MHz
Clipped Sinewave Output Voltage	0.8 Vp-p typical

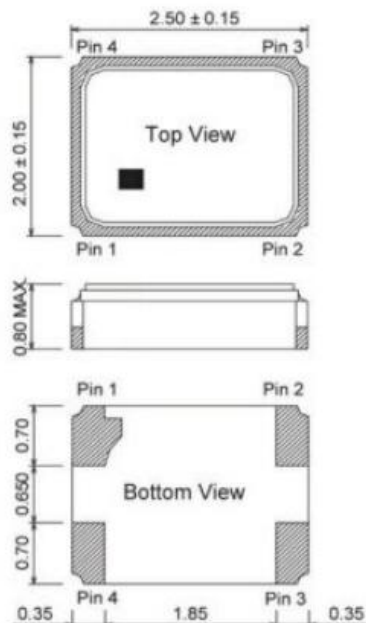

Pin Connection

Name	Function
Pin 1	AFC
Pin 2	GND
Pin 3	OUTPUT
Pin 4	VCC



Units: mm