




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± MAX
T:	6.0	± MAX
Lead Diameter	1.0	± 10
A:	7.8	± 10
L:	38.0	± 10
Coating Lead Run Down (straight Leads)	4.0	± 10
B:	9.00	± 10
C:	3.00	± 10

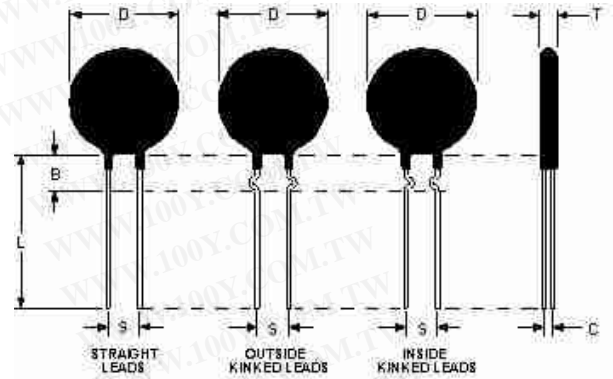

Electrical Specifications

Resistance:	0.50 Ω	± 25 %
Max Steady State Current upto 65°C:	16.00	A
Max Rec. Energy Rating:	160.00	J
Actual Failure Instantaneous Energy:	320.00	J
Maximum Capacitance @ 120 VAC:	10000.00	µf
Maximum Capacitance @ 240 VAC:	2480.00	µf
Resistance @ 100% Max Current:	0.02	Ω
Resistance @ 50% Max Current:	0.04	Ω
Body Temperature at 100% Max Current:	184.00	°c
Dissipation Constant:	32.40	mw/°c
Thermal Time Constant:	94.00	Sec.
Material Type (for Beta and Curve):	A	

SL22 0R516	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a