

## NC7SV74

### TinyLogic® ULP-A D-Type Flip-Flop with Preset and Clear

#### General Description

The NC7SV74 is a single D-type CMOS Flip-Flop with preset and clear from Fairchild's Ultra Low Power-A (ULP-A) Series of TinyLogic® in both the space saving US8 and MicroPak™ packages. ULP-A is ideal for applications that require extreme high speed, high drive and low power. This product is designed for a wide low voltage operating range (0.9V to 3.6V  $V_{CC}$ ) and applications that require more drive and speed than the TinyLogic ULP series, but still require low power consumption.

The NC7SV74 is uniquely designed for optimized power and speed, and is fabricated with an advanced CMOS technology to achieve high-speed operation while maintaining low CMOS power dissipation.

The signal level applied to the D input is transferred to the Q output during the positive going transition of the CLK pulse.

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

#### Features


- Space saving US8 surface mount package
- MicroPak Pb-Free leadless package
- 0.9V to 3.6V  $V_{CC}$  supply operation
- 3.6V overvoltage tolerant I/Os at  $V_{CC}$  from 0.9V to 3.6V
- Extremely High Speed  $t_{PD}$ 
  - 1.0 ns typ for 2.7V to 3.6V  $V_{CC}$
  - 1.2 ns typ for 2.3V to 2.7V  $V_{CC}$
  - 1.9 ns typ for 1.65V to 1.95V  $V_{CC}$
  - 3.2 ns typ for 1.4V to 1.6V  $V_{CC}$
  - 6.0 ns typ for 1.1V to 1.3V  $V_{CC}$
  - 13.0 ns typ for 0.9V  $V_{CC}$
- Power-Off high impedance inputs and outputs
- High Static Drive ( $I_{OH}/I_{OL}$ )
  - ±24.0 mA @ 3.00V  $V_{CC}$
  - ±18.0 mA @ 2.30V  $V_{CC}$
  - ±6.0 mA @ 1.65V  $V_{CC}$
  - ±4.0 mA @ 1.4V  $V_{CC}$
  - ±2.0 mA @ 1.1V  $V_{CC}$
  - ±0.1 mA @ 0.9V  $V_{CC}$
- Ultra low dynamic power

#### Ordering Code:

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7SV74K8X	MAB08A	V74	8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide	3k Units on Tape and Reel
NC7SV74L8X	MAC08A	Z4	Pb-Free 8-Lead MicroPak, 1.6 mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

#### Battery Life vs. $V_{CC}$ Supply Voltage



TinyLogic ULP and ULP-A with up to 50% less power consumption can extend your battery life significantly.

$$\text{Battery Life} = (V_{\text{battery}} \cdot I_{\text{battery}} \cdot 9) / (P_{\text{device}}) / 24\text{hrs/day}$$

$$\text{Where, } P_{\text{device}} = (I_{CC} \cdot V_{CC}) + (C_{PD} + C_L) \cdot V_{CC}^2 \cdot f$$

Assumes ideal 3.6V Lithium Ion battery with current rating of 900mAh and derated 90% and device frequency at 10MHz, with  $C_L = 15$  pF load


TinyLogic® is a registered trademark of Fairchild Semiconductor Corporation.  
 MicroPak™ and Quiet Series™ are trademarks of Fairchild Semiconductor Corporation.

NC7SV74

### Pin Descriptions

Pin Names	Description
D	Data Input
CK	Clock Pulse Input
$\overline{\text{CLR}}$	Direct Clear Input
Q, $\overline{\text{Q}}$	Flip-Flop Output
$\overline{\text{PR}}$	Direct Preset Input

### Logic Symbol

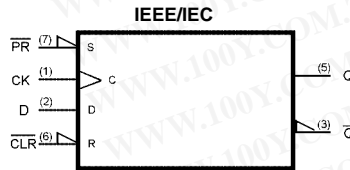


### Truth Table

Inputs				Outputs		Function
CLR	PR	D	CK	Q	$\overline{\text{Q}}$	
L	H	X	X	L	H	Clear
H	L	X	X	H	L	Preset
L	L	X	X	H	H	—
H	H	L	↑	L	H	—
H	H	H	↑	H	L	—
H	H	X	↓	Q <sub>n</sub>	$\overline{\text{Q}}_n$	No Change

H = HIGH Logic Level  
 L = LOW Logic Level  
 Q<sub>n</sub> = No change in data  
 X = Immaterial  
 Z = High Impedance  
 ↑ = Rising Edge  
 ↓ = Falling edge


### Connection Diagrams

Pin Assignments for US8



(Top View)


Pin One Orientation Diagram



AAA represents Product Code Top Mark - see ordering code

**Note:** Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Pad Assignments for MicroPak



(Top Thru View)

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Absolute Maximum Ratings (Note 1)		Recommended Operating Conditions (Note 3)	
Supply Voltage (V <sub>CC</sub> )	-0.5V to +4.6V	Power Supply	0.9V to 3.6V
DC Input Voltage (V <sub>IN</sub> )	-0.5V to +4.6V	Input Voltage (V <sub>IN</sub> )	0V to 3.6V
DC Output Voltage (V <sub>OUT</sub> )		Output Voltage (V <sub>OUT</sub> )	
HIGH or LOW State (Note 2)	-0.5V to V <sub>CC</sub> + 0.5V	V <sub>CC</sub> = 0.0V	0V to 3.6V
V <sub>CC</sub> = 0V	-0.5V to +4.6V	HIGH or LOW State	0V to V <sub>CC</sub>
DC Input Diode Current (I <sub>IK</sub> ) V <sub>IN</sub> < 0V	±50 mA	Output Current in I <sub>OH</sub> /I <sub>OL</sub>	
DC Output Diode Current (I <sub>OK</sub> )		V <sub>CC</sub> = 3.0V to 3.6V	±24.0 mA
V <sub>OUT</sub> < 0V	-50 mA	V <sub>CC</sub> = 2.3V to 2.7V	±18.0 mA
V <sub>OUT</sub> > V <sub>CC</sub>	+50 mA	V <sub>CC</sub> = 1.65V to 1.95V	±6.0 mA
DC Output Source/Sink Current (I <sub>OH</sub> /I <sub>OL</sub> )	± 50 mA	V <sub>CC</sub> = 1.4V to 1.6V	±4.0 mA
DC V <sub>CC</sub> or Ground Current per		V <sub>CC</sub> = 1.1V to 1.3V	±2.0 mA
Supply Pin (I <sub>CC</sub> or Ground)	± 50 mA	V <sub>CC</sub> = 0.9V	±0.1 mA
Storage Temperature Range (T <sub>STG</sub> )	-65°C to +150°C	Free Air Operating Temperature (T <sub>A</sub> )	-40°C to +85°C
		Minimum Input Edge Rate (Δt/ΔV)	
		V <sub>IN</sub> = 0.8V to 2.0V, V <sub>CC</sub> = 3.0V	10 ns/V

**Note 1:** Absolute Maximum Ratings: are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** I<sub>O</sub> Absolute Maximum Rating must be observed.

**Note 3:** Unused inputs must be held HIGH or LOW. They may not float.

### DC Electrical Characteristics

Symbol	Parameter	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C		T <sub>A</sub> = -40°C to +85°C		Units	Conditions
			Min	Max	Min	Max		
V <sub>IH</sub>	HIGH Level Input Voltage	0.90	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	V	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>	0.65 x V <sub>CC</sub>		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	1.6	1.6	1.6	1.6		
V <sub>IL</sub>	LOW Level Input Voltage	0.90		0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>	V	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30		0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60		0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95		0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>	0.35 x V <sub>CC</sub>		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70		0.7	0.7	0.7		
V <sub>OH</sub>	HIGH Level Output Voltage	0.90	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V	I <sub>OH</sub> = -100 μA
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1	V <sub>CC</sub> - 0.1		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2		
		2.70 ≤ V <sub>CC</sub> ≤ 3.60	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2	V <sub>CC</sub> - 0.2		
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>	0.75 x V <sub>CC</sub>		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	1.25	1.25	1.25	1.25		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	2.0	2.0	2.0	2.0		
2.30 ≤ V <sub>CC</sub> ≤ 2.70	1.8	1.8	1.8	1.8				
2.70 ≤ V <sub>CC</sub> ≤ 3.60	2.2	2.2	2.2	2.2				
2.30 ≤ V <sub>CC</sub> ≤ 2.70	1.7	1.7	1.7	1.7				
2.70 ≤ V <sub>CC</sub> ≤ 3.60	2.4	2.4	2.4	2.4				
2.70 ≤ V <sub>CC</sub> ≤ 3.60	2.2	2.2	2.2	2.2				
								I <sub>OH</sub> = -2.0 mA
								I <sub>OH</sub> = -4.0 mA
								I <sub>OH</sub> = -6.0 mA
								I <sub>OH</sub> = -12.0 mA
								I <sub>OH</sub> = -18.0 mA
								I <sub>OH</sub> = -24.0 mA

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

DC Electrical Characteristics (Continued)								
Symbol	Parameter	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C		T <sub>A</sub> = -40°C to +85°C		Units	Conditions
			Min	Max	Min	Max		
V <sub>OL</sub>	LOW Level Output Voltage	0.90		0.1		0.1	V	I <sub>OL</sub> = 100 μA
		1.10 ≤ V <sub>CC</sub> ≤ 1.30		0.1		0.1		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60		0.2		0.2		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95		0.2		0.2		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70		0.2		0.2		
		2.70 ≤ V <sub>CC</sub> ≤ 3.60		0.2		0.2		
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	0.25 x V <sub>CC</sub>	0.25 x V <sub>CC</sub>				
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	0.25 x V <sub>CC</sub>	0.25 x V <sub>CC</sub>				
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	0.3	0.3				
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	0.4	0.4				
2.70 ≤ V <sub>CC</sub> ≤ 3.60	0.4	0.4						
			0.4	0.4			I <sub>OL</sub> = 12.0 mA	
			0.6	0.6			I <sub>OL</sub> = 18.0 mA	
			0.4	0.4			I <sub>OL</sub> = 24.0 mA	
			0.55	0.55				
I <sub>IN</sub>	Input Leakage Current	0.90 to 3.60		±0.1		±0.5	μA	0 ≤ V <sub>I</sub> ≤ 3.6V
I <sub>OFF</sub>	Power Off Leakage Current	0		0.5		0.5	μA	0 ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V
I <sub>CC</sub>	Quiescent Supply Current	0.90 to 3.60		0.9		0.9	μA	V <sub>I</sub> = V <sub>CC</sub> or GND V <sub>CC</sub> ≤ V <sub>I</sub> ≤ 3.6V
		0.90 to 3.60				±0.9		

AC Electrical Characteristics										
Symbol	Parameter	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units	Conditions	Figure Number
			Min	Typ	Max	Min	Max			
t <sub>MAX</sub>	Maximum Clock Frequency	0.90		50			MHz	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 5	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	150		150			C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ		
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	200		200			C <sub>L</sub> = 30 pF		
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	200		250			R <sub>L</sub> = 500Ω		
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	200		175					
2.70 ≤ V <sub>CC</sub> ≤ 3.60	200		200							
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay CK to Q, $\bar{Q}$	0.90		13.0			ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 3	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	3.0	6.0	9.9	1.0		14.6		C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	1.0	3.2	6.0	1.0		7.2		C <sub>L</sub> = 30 pF
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	1.0	1.9	4.5	1.0		5.3		R <sub>L</sub> = 500Ω
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	0.8	1.2	3.0	0.7		3.7		
2.70 ≤ V <sub>CC</sub> ≤ 3.60	0.7	1.0	2.8	0.6	3.2					
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay $\overline{CLR}$ , $\overline{PR}$ , to Q, $\bar{Q}$	0.90		14.0			ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 3	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	3.0	6.5	10.5	1.0		15.1		C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	1.0	3.2	6.0	1.0		7.2		C <sub>L</sub> = 30 pF
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	1.0	1.9	4.5	1.0		5.3		R <sub>L</sub> = 500Ω
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	0.8	1.2	3.0	0.7		3.7		
2.70 ≤ V <sub>CC</sub> ≤ 3.60	0.7	1.0	2.8	0.6	3.2					
t <sub>S</sub>	Setup Time, CK to D	0.90		6.5		6.5	ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 4	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	3.5		3.5			3.5		C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	2.0		2.0			2.0		C <sub>L</sub> = 30 pF
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	1.5		1.5			1.5		R <sub>L</sub> = 500Ω
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	2.0		2.0			2.0		
2.70 ≤ V <sub>CC</sub> ≤ 3.60	1.5		1.5		1.5					
t <sub>H</sub>	Hold Time, CK to D	0.90		0.5		0.5	ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 4	
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	0.5		0.5			0.5		C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	0.5		0.5			0.5		C <sub>L</sub> = 30 pF
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	0.5		0.5			0.5		R <sub>L</sub> = 500Ω
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	0.5		0.5			0.5		
2.70 ≤ V <sub>CC</sub> ≤ 3.60	0.5		0.5		0.5					

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

**AC Electrical Characteristics** (Continued)


Symbol	Parameter	V <sub>CC</sub> (V)	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40°C to +85°C		Units	Conditions	Figure Number
			Min	Typ	Max	Min	Max			
t <sub>w</sub>	Pulse Width, CK, PR, CLR	0.90	7.0			7.0		ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 5
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	4.0			4.0			C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ	
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	3.0			3.0				
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	3.0			3.0			C <sub>L</sub> = 30 pF	
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	3.0			3.0			R <sub>L</sub> = 500Ω	
2.70 ≤ V <sub>CC</sub> ≤ 3.60	3.0			3.0						
t <sub>REC</sub>	Recover Time CLR, PR to CK	0.90	8.0			8.0		ns	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 1 MΩ	Figures 1, 4
		1.10 ≤ V <sub>CC</sub> ≤ 1.30	4.5			4.5			C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 KΩ	
		1.40 ≤ V <sub>CC</sub> ≤ 1.60	3.0			3.0				
		1.65 ≤ V <sub>CC</sub> ≤ 1.95	3.0			3.0			C <sub>L</sub> = 30 pF	
		2.30 ≤ V <sub>CC</sub> ≤ 2.70	3.0			3.0			R <sub>L</sub> = 500Ω	
2.70 ≤ V <sub>CC</sub> ≤ 3.60	3.0			3.0						

**Capacitance**

Symbol	Parameter	Typ	Max	Units	Conditions
C <sub>IN</sub>	Input Capacitance	2.0		pF	V <sub>CC</sub> = 0V
C <sub>OUT</sub>	Output Capacitance	4.5		pF	V <sub>CC</sub> = 0V
C <sub>PD</sub>	Power Dissipation Capacitance	20.0		pF	V <sub>I</sub> = V <sub>CC</sub> or 0V f = 10 MHz

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


### AC Loading and Waveforms



$C_L$  includes load and stray capacitance  
 Input PRR = 1.0 MHz;  $t_w = 500$  ns

FIGURE 1. AC Test Circuit

Test	Switch
$t_{PLH}$ , $t_{PHL}$	Open
$t_{pZL}$ , $t_{pLZ}$	6V at $V_{CC} = 3.3V \pm 0.3V$ $V_{CC} \times 2$ at $V_{CC} < 3.0V$
$t_{pZH}$ , $t_{pHZ}$	GND



CP Input = AC Waveform;  $t_r = t_f = 2.5$  ns;  
 CP Input PRR = 10 MHz; Duty Cycle = 50%  
 D Input PRR = 5MHz; Duty Cycle = 50%

FIGURE 2.  $I_{CCD}$  Test Circuit

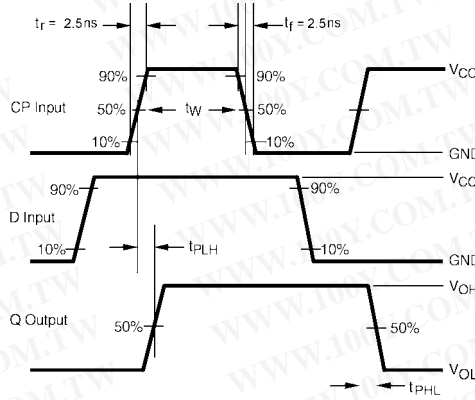


FIGURE 3. AC Waveforms

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

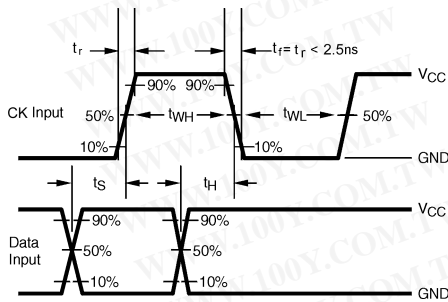


FIGURE 4. AC Waveforms

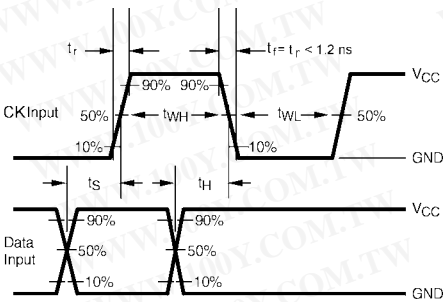


FIGURE 5. AC Waveforms

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


NCTS74

### Tape and Reel Specification

#### TAPE FORMAT for US8

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
K8X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed


#### TAPE DIMENSIONS inches (millimeters)

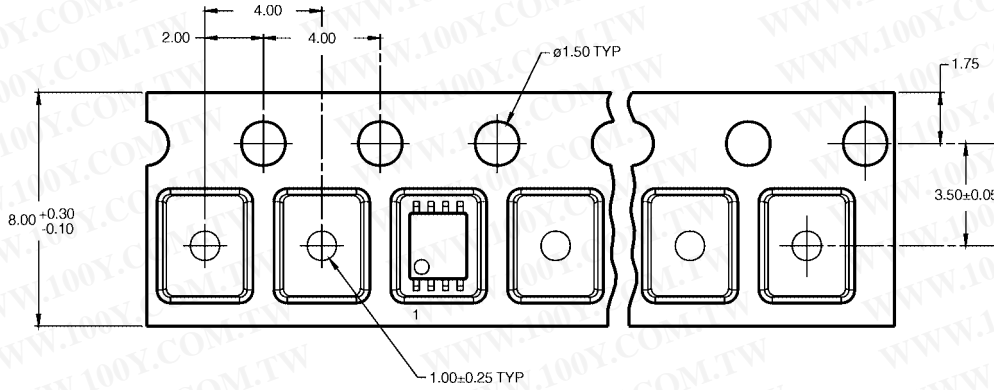

#### TAPE FORMAT for MicroPak

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
L8X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed


#### TAPE DIMENSIONS inches (millimeters)

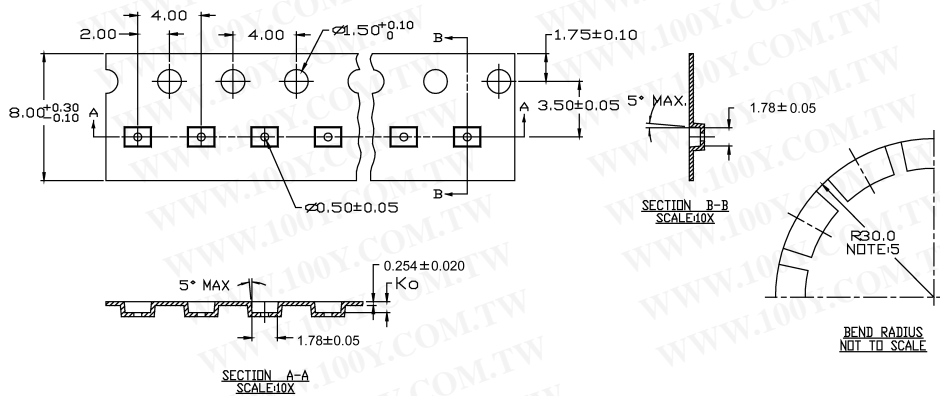

NC7SV74

**Tape and Reel Specification** (Continued)

REEL DIMENSIONS inches (millimeters)

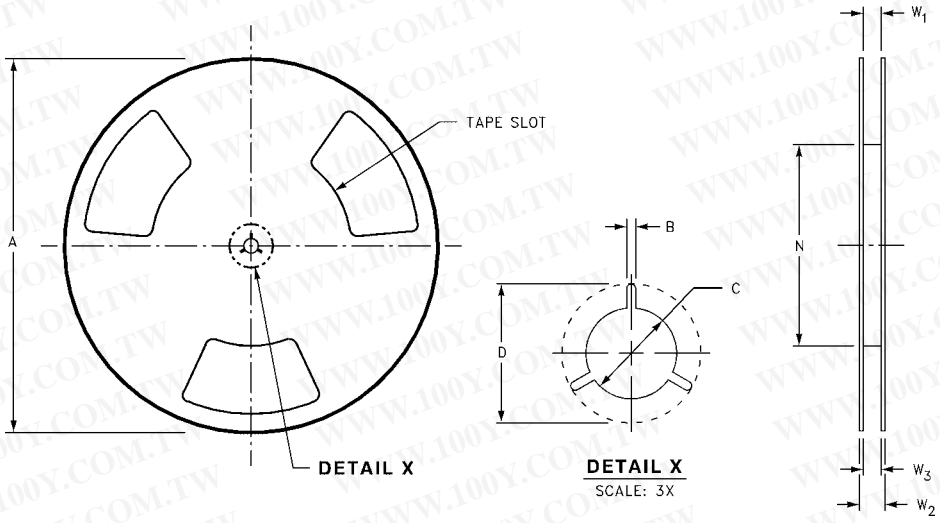


Tape Size	A	B	C	D	N	W1	W2	W3
8 mm	7.0 (177.8)	0.059 (1.50)	0.512 (13.00)	0.795 (20.20)	2.165 (55.00)	0.331 + 0.059/-0.000 (8.40 + 1.50/-0.00)	0.567 (14.40)	W1 + 0.078/-0.039 (W1 + 2.00/-1.00)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

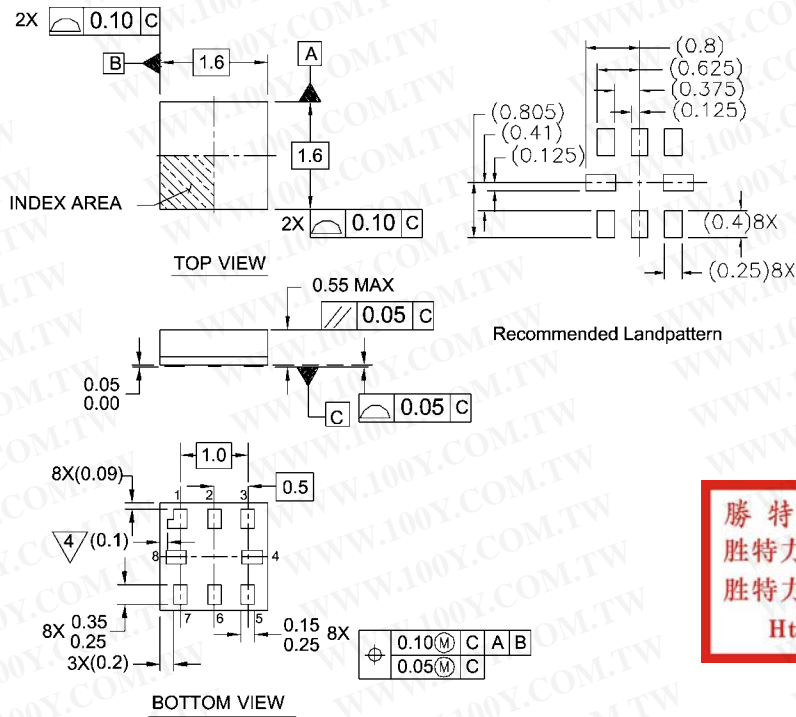

**Notes:**

1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y.14M-1994
4. PIN 1 FLAG, END OF PACKAGE OFFSET.

MAC08AREVC

**Pb-Free 8-Lead MicroPak, 1.6 mm Wide  
Package Number MAC08A**

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)