


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION .

FEATURES

- High Voltage : BC546 $V_{CEO}=65V$.
- For Complementary With PNP Type BC556/557/558.

MAXIMUM RATINGS ($T_a=25^{\circ}C$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	BC546	V_{CBO}	80	V
	BC547		50	
	BC548		30	
Collector-Emitter Voltage	BC546	V_{CEO}	65	V
	BC547		45	
	BC548		30	
Emitter-Base Voltage	BC546	V_{EBO}	6	V
	BC547		6	
	BC548		5	
Collector Current	BC546	I_C	100	mA
	BC547		100	
	BC548		100	
Emitter Current	BC546	I_E	-100	mA
	BC547		-100	
	BC548		-100	
Collector Power Dissipation		P_C	625	mW
Junction Temperature		T_j	150	$^{\circ}C$
Storage Temperature Range		T_{stg}	-55~150	$^{\circ}C$

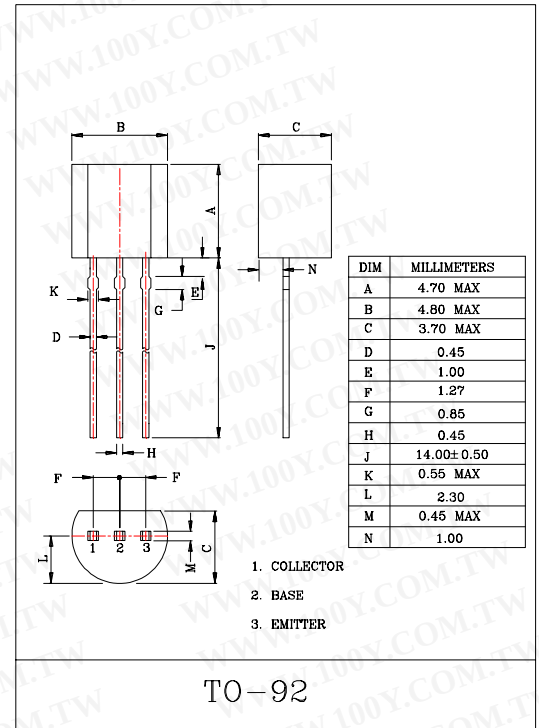

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BC546/7/8

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=30V, I_E=0$	-	-	15	nA
DC Current Gain (Note)	BC546	h_{FE}	$V_{CE}=5V, I_C=2mA$	110	-	450	
	BC547			110	-	800	
	BC548			110	-	800	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=100mA, I_B=5mA$	-	-	0.6	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=100mA, I_B=5mA$	-	0.9	1.1	V
Base-Emitter Voltage		$V_{BE(ON1)}$	$V_{CE}=5V, I_C=2mA$	0.58	-	0.7	V
		$V_{BE(ON2)}$	$V_{CE}=5V, I_C=10mA$	-	-	0.75	V
Transition Frequency		f_T	$V_{CE}=5V, I_C=10mA, f=100MHz$	-	150	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=10V, f=1MHz$	-	-	4.5	pF
Noise Figure		NF	$V_{CE}=6V, I_C=0.1mA, R_g=10k\Omega, f=1kHz$	-	1.0	10	dB

NOTE : According to the value of h_{FE} the BC546, BC547, BC548 are classified as follows.

CLASSIFICATION		none	A	B	C
h_{FE}	BC546	110~450	110~220	200~450	-
	BC547	110~800	110~220	200~450	420~800
	BC548	110~800	110~220	200~450	420~800

