

1700W DC to AC INVERTER / 1700W 電源轉換器



描述:


電池低電壓自動關機及電池反接保護。電池低電壓關機前具兩蜂鳴器警告音，提醒使用者。具完整之過載及短路保護功能。整機效率大於 90%。超強的起動功率。

特性:

Description : 1. With strict Q.C. and strong development ability, our inverter series have achieved CE, e-mark via TUV approval and ISO 9001 certification. 2. All of our inverters are wisdom micro control models and have more better protections than normal inverters . Specification : 1. DC to AC inverter:150W, 300W, 400W, 600W, 800W, 1000W, 1700W, 2500W. 2. Inverter W/battery charger:350W, 600W, 1000W, 1700W.3. DC to DC converter:10A, 15A, 20A. Features : All of our inverter are intelligent models and have CE, e-mark approval.

規格:

AC Output Socket

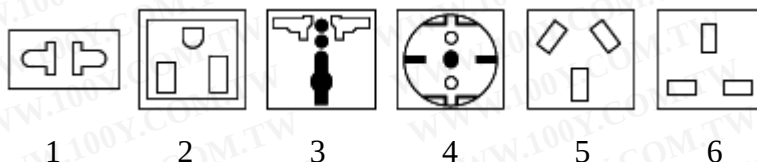

ITEMS	DC 12V	DC 24V
Output power (輸出功率)	1500w continue (持續輸出) 1700W (30 min) (1700W 輸出 30 分鐘) 3000w surge output (瞬間輸出)(100ms)	1500w continue (持續輸出) 1700W (30 min) (1700W 輸出 30 分鐘) 3000w surge output (瞬間輸出)(100ms)
Input voltage (輸入電壓)	DC 10~15 v	DC 20~30 V
Output voltage (輸出電壓)	AC 100,110,120,220,230,240 V	AC 100,110,120,220,230,240 V
Output waveform (輸出波形)	modified sine wave (模擬正弦波)	modified sine wave (模擬正弦波)
Output frequency (輸出頻率)	50 or 60 HZ	50 or 60 HZ
Stand by current 待機電流	< 0.6 A	< 0.36 A
Efficiency 能源效率	85 % ~ 90 %	85 % ~ 90 %
Battery low alarm 電池低壓蜂鳴警示	DC 10.5 +/- 0.5 V	DC 21 +/- 0.8 V
Battery low shutdown 電池低壓關機	DC 10 +/- 0.5 V	DC 20 +/- 0.8 V

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Thermal protect 溫度保護	60 +/- 5°C	60 +/- 5°C
Cooling 散熱方式	by fan 風扇散熱	by fan 風扇散熱
Protections (保護功能)	output short input polarity reverse (by fuse) high DC input voltage battery low alarm battery low shutdown over load over temperature	輸出短路保護 輸入極性保護(保險絲) 高壓直流輸入保護 電池低電壓蜂鳴警示 電池低電壓關機 過載保護 過溫保護
Fuse 保險絲	30 A * 10 PCS	20 A * 10 PCS
AC output 交流輸出插座	three (type 1,2) 3 個 two (the other) 2 個	three (type 1,2) 3 個 two (the other) 2 個
Size (l * w * h) 尺寸	455* 210 * 85 mm	455* 210 * 85 mm
Weight 重量	5.5 kgs	5.5 kgs